

Jadisi



Solar Street Light User Manual

Thanks so much for choosing our solar street light. For any further questions, please email us.

Warm Tips

- Step1: Turn on the switch (Long Press Button)
- Step2: Charging 2 hours under the sunlight
- Step3: Test the remote controller work or not
(Note: Remote control is pointed at the receiver)

Follow the instruction when you received

Block the light sensing part



1. Block the light sensor part (solar panel) and Turn on the switch (Long Press Button).


2. Charging 2 hours under the sunlight. The indicator light flashes to indicate that it is charging, the color of the fully charged indicator light is 2 red lights + 2 blue lights + 1 green light (Indicator no longer flashes)




3. Test the remotecontroller work or not.
(Note: Remote control is pointed at the receiver)

Package

①Solar light	⑥Open spanner
②Fixing arm pole	⑦Batttary
③Backplate for pole mounting	⑧Wall mount bolts
④Backplate for luminaire mounting	⑨Long bolts for pole mounting
⑤Remote control	⑩Short bolts for luminaire mounting

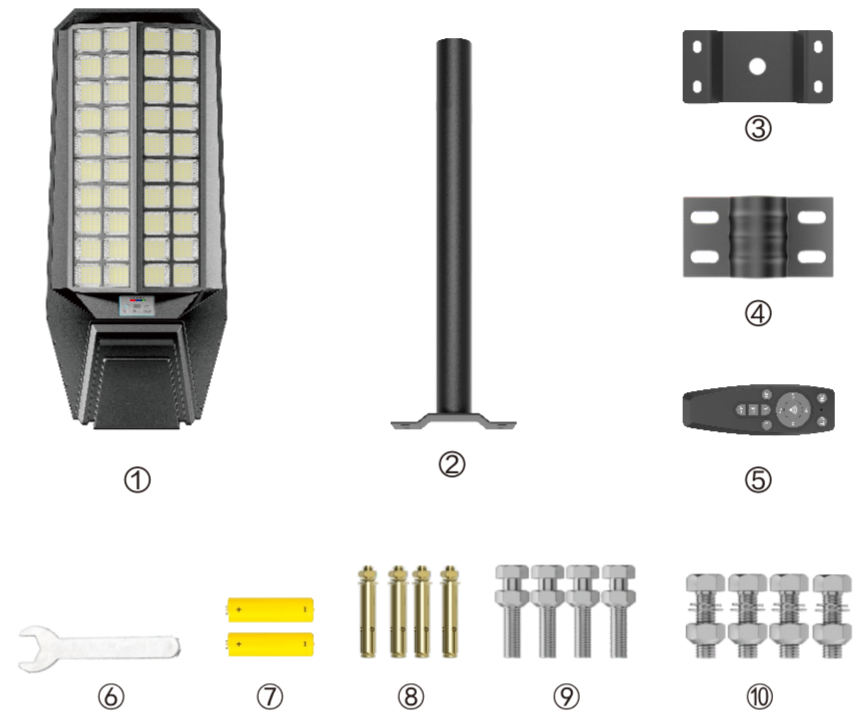

Installation

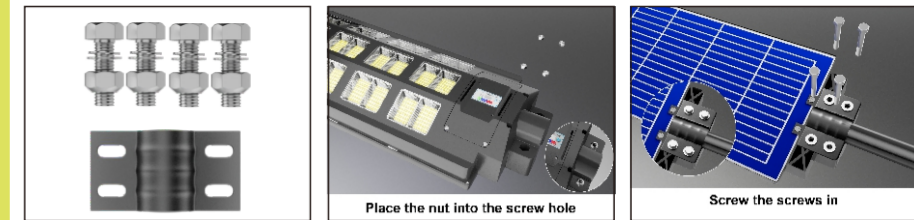

Wall Mount




- On the wall**
 Step 1: Mark the hole loction,Drill 4 holes in the wall according to the position of the bracket's hole.
 Step 2: Knock the bolts into the wall.
 Step 3: Mount the light, lock the screws and tighten them.

Pole Mount




- On the pole**
 Step 1: Secure the light to the pole with the long bolt and back plate.
 Step 2: then tighten the long bolt .

LedIndicator meaning

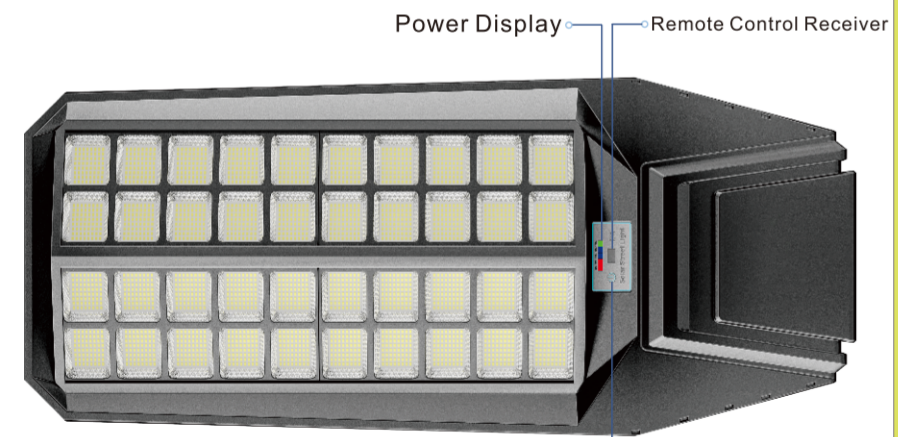

Note: Please long press " (⏻) " until the light turns on


Power display meaning

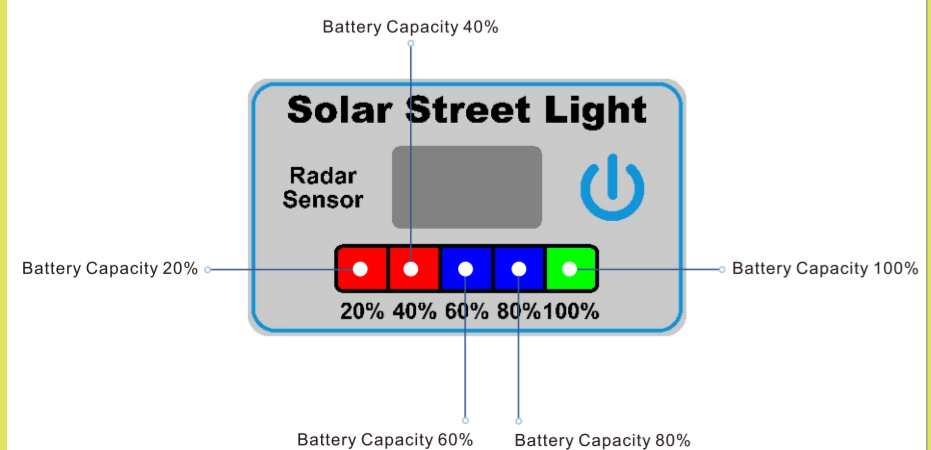

When fully charged, all indicator lights will be on (2 red lights+ 2 bule lights+ 1 greenlight),the color of the battery indicator will not change.


Remote Control Buttons

* Please insert the 2 batteries ((1.5 V AAA type). Make sure that the positive and negative ends are facing in the correct direction. the control distance of remote is 35ft.

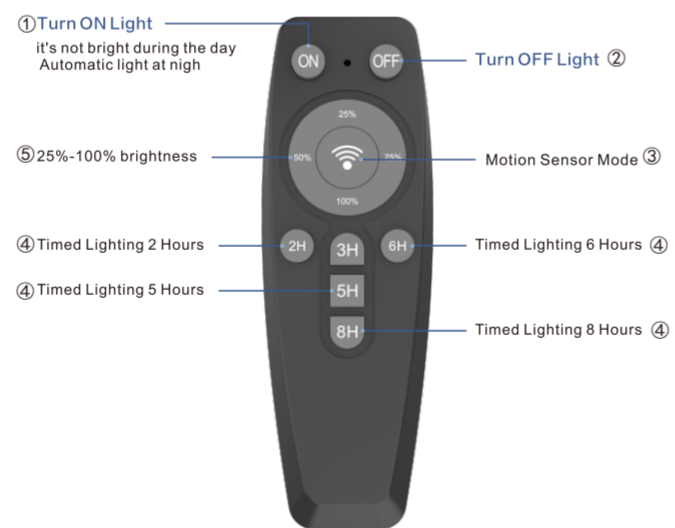

1. ON
When you press the button ON, the solar street light will be 100% brightness.
2. OFF
When you press the button OFF, the solar street light will be turned off and cannot be turned on automatically until the next day. (Tips: You need to press (⏻) on the light body to turn off the solar street light completely.)
3. Motion Sensor Mode
Motion Sensor Mode:When motion is detected, the brightness increases to 100%. When there is no motion, it is stationary for about 10-20 seconds and the brightness returns to 30%.
4. Timed Lighting
Timed Lighting: Timed 100% brightNH Lighting 2/3/5/6/8 hours without radar sense motion function.
5. Brightness level
Brightness level: you can set up the brightness level (25% / 50%/ 75%/100%) of the light.

Motion Sensor Mode

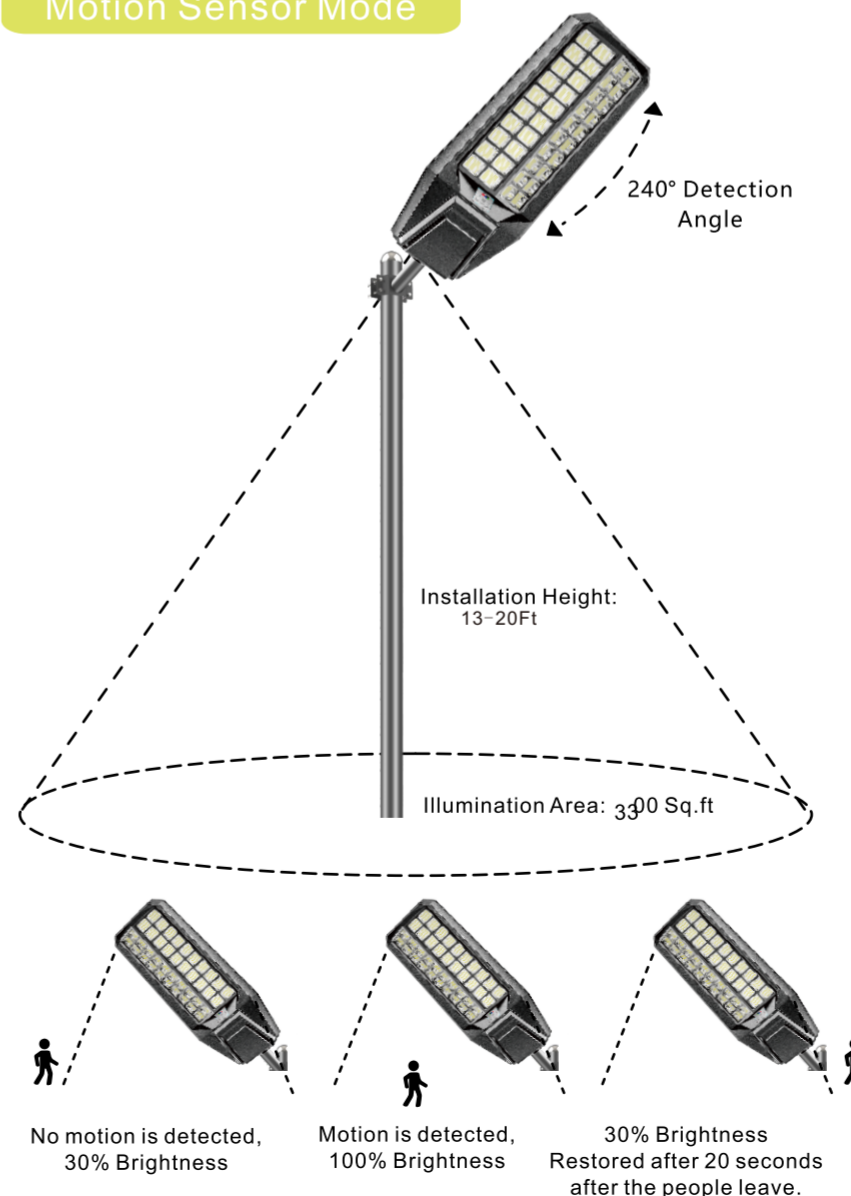

How does your solar powered fixture work?

1. During the day, the solar converts sunlight into electricity and recharge thebattery.
2. At night, the light turn on automatically using the electricity storedduring that day.
3. The number of hours the lights depends on your geographicalallocations, weather conditions and seasonal sunlight availability.Also, itdepends on the lighting time you choose.
4. Place the solar light fixture in an area where it can receive direct sunlight forat least 8 hours each day. Shadowed locations should not be near lights,asthese may cause the solar light to turn off prematurely.

Precautions

1. First time ofuse,place the solar light in a location where it can receive a full8 hour of sunlight to allow the rechargeable battery to reach maximum capacity.
2. Then put the solar panel in the sun to charge
3. Please choose a position without any shelter forenough sunshine and the solar panel should be fully exposed under sun.
4. Keep the solar panel surface clean, this helps speed up charging. It is suggestedto clean the solar panel for a period of time.
5. The light will turn off after run out of battery especially in area that lack of sunlight, in cloudy winter and during long rainy weeks. If such problem occur.first press OFF charge the solar panel for two days and then turn on .
6. Test light control: After blocked the solar panel, press the " (⏻) " button, the lightison; the solar panel is facing the sun light, the light is off, then the light control isnormal.

Troubleshooting

If the light does not turn on at dusk after 8 hours of charging:*Ensure that the solar light fixture is in a bright sunny location and not in a shady area during the day.
 *Make sure that the solar light fixture is turned on(Auto)
 *Make sure that the remote control battery has power.
 *If the above faults are eliminated, it may be that the solar battery needsto be replaced or the controller is faulty. Please contact me in time.

Warranty

We provide our customers with a warranty of 12 months from the date of purchase.