


TC-073CA100

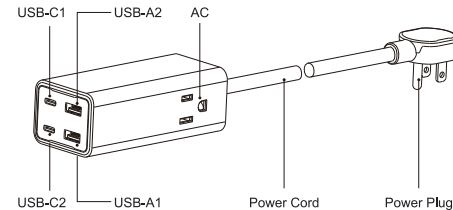

Features

1. Model Name: TC-073CA100
2. Space saving, not only a wall charger also a power strip, more convenient for daily usage.
3. With 1 DC outlets, 2 AC ports, 2 USB-C ports and 2 USB-A ports ports, charging 6 different devices simultaneously, charging 6 different devices simultaneously.
4. This product is a 100W travel charger using a new semiconductor material (GaN) process.
5. Supports USB-C1/2: PD3.0/PPS/QC4.0+/FCP/AFC/QC3.0/BC1.2, USB-A: QC3.0/FCP/AFC and other features, the maximum output power of USB-C1/USB-C2 single port can reach 100W(20V --- 5A), which can provide the PD fast charging for most laptops, mobile phones, and tablets. The maximum output power of a single USB-A1 port can reach 30W(20V --- 1.5A), and it supports 22.5W SCP super fast charging.
6. The product has built in multiple safety protection circuits such as over-current, over-voltage, and temperature protection.

How to Use

1. Plug the power supply into a 100-240V socket or power strip.
2. Connect the male end of the USB-C (or A) cable to the female USB-C (or A) connector on the multifunctional charging station.
3. Connect the terminal connector of the USB-C (or A) cable to your cell phone or electronic device then the multifunctional charging station starts charging your device.
4. USB-C (or A) automatically identifies the device to adjust the output voltage and current to achieve fast charging.
5. Please remove the TC-073CA100 multifunctional charging station from the socket or power strip if you do not need to use it.

Specifications

Model: TC-073CA100

Input: AC 100-240V 50/60Hz 2.5A

Rated Power: 1625W Max

Output USB-C1/C2: 5V --- 3A, 9V --- 3A, 12V --- 3A, 15V --- 3A, 20V --- 5A 100W Max

USB-A1: 4.5V --- 5A, 5V --- 4.5A, 9V --- 3A, 12V --- 2.5A, 20V --- 1.5A 30W MAX

USB-A2: 5V --- 1A 5W

USB-C1+USB-C2: 65W+30W

USB-C1+USB-A1: 65W+30W

USB-C1+USB-A2: 90W+5W

USB-C2+USB-A2: 90W+5W

USB-A1+USB-A2: 30W+5W

USB-C2+USB-A1: 25W

USB-C1+(USB-C2+USB-A1): 65W+25W

USB-C1+USB-C2+USB-A2: 65W+30W+5W

USB-C1+USB-A1+USB-A2: 65W+30W+5W

(USB-C2+USB-A1)+USB-A2: 25W+5W

USB-C1+(USB-C2+USB-A1)+USB-A2: 65W+25W+5W

The above data are measured by the laboratory, the actual use will be slightly different depending on the specific circumstances.

Packages

Product Size: 12.3cm x 4.7cm x 3.6cm

Product Weight: 470g

Packing Included: GaN charger×1, User manual×1

Use Environment

Use ambient temperature: non-tropical area below sea wave 2000m.

Temperature 5°C to 25°C;

Storage environment: Temperature-20-65°C

Humidity 5-95%RH

Warning Tips

Please read all instructions and warnings before using this product. Non-standard use will damage the product or personal safety.

1. Do not store the product in high temperature, strong light and strong magnetic field.
2. Do not place it in other harsh environments such as fire source.
3. Improper use of the product can easily cause damage to the product or may endanger personal and property safety.
4. Consumer shall be liable for any personal and property damage resulted from their improper use against the user manual or ignoring the warning, to which our company will not bear any legal liability.
5. Disintegration of this product by non-professionals is strictly prohibited.
6. Use of household appliances or loads in excess of the output current of this product shall be avoided (no output due to circuit protection).
7. Intense physical actions including knocking, throwing, trampling on and squeezing, etc. shall be avoided.

Statement on Toxic and Hazardous Substances in Electronic Information Products

Part Description	PCB	Plastic	Metal
Toxic or hazardous substances and elements			
Lead (Pb)	×	○	×
Mercury (Hg)	○		○
Cadmium (Cd)	○		
Hexavalent chromium (CrV)	○		○
Polychlorinated biphenyls (PCBB)	○		○
Polychlorinated diphenyl ethers (PCBDE)			

This form is compiled in accordance with SJ/T11364.

O: It indicates that the content of the toxic and harmful substance in all homogeneous materials of the component is below the limit specified in GB/T 26572 standard.

X: The content of toxic and harmful substances in at least one homogeneous material of this part exceeds the limit stipulated in GB/T26572 standard.

English

CAUTION: Read all instructions and warnings prior to using this product. Improper use of this product may result in product damage, excess heat, toxic fumes, fire or explosion.

1. IMPORTANT SAFETY INSTRUCTIONS-SAVE THESE INSTRUCTIONS.
DANGER-TO REDUCE THE RISK OF FIRE OR ELECTRIC SHOCK, CAREFULLY FOLLOW THESE INSTRUCTIONS.
2. For connection to a supply not in the U.S.A, use an attachment plug adapter of the proper configuration for the power outlet, if needed.
3. Risk of Electric Shock.
4. For indoor use only.
5. Please check prior use, if output voltage and current of the power supply is suitable for the product.
6. For information technology equipment use only.
7. The cover may under no circumstances be opened.
If the cover is damaged, then the power supply may no longer be used.
8. Children should be supervised to ensure that they do not play with the appliance.

Français

ATTENTION: Lisez toutes les instructions et les avertissements avant d'utiliser ce produit. L'utilisation inappropriée de ce produit peut entraîner la détérioration du produit, l'excès de chaleur, des fumées toxiques, incendie ou une explosion.

1. CONSIGNES DE SECURITE EIMP OR TANTES -CONSERVEZ CES INSTRUCTIONS DANGER-POUR REDUIRE LES RISQUES D'INCENDIE OU DE CHOC ELECTRIQUE SUIVEZ ATTENTIVEMENT CES INSTRUCTIONS.
2. Pour la connexion avec l'alimentation pas aux Etats-Unis, utilisez un adaptateur de fixation de la configuration correcte pour la prise d'alimentation, si nécessaire.
3. RISQUE DE CHOC ELECTRIQUE.

4. POUR UNE UTILISATION EN INTERIEUR.
5. Se il vous plait vérifier avant l'utilisation, si la tension de sortie et le courant de l'alimentation est adapté au produit.
6. Pour l'utilisation des équipements de technologie d'information seulement.
7. Le couvercle peut en aucun cas être ouvert.
Si le couvercle est endommagé, l'alimentation ne peut plus être utilisée.
8. Les enfants doivent être surveillés pour s'assurer qu'ils ne jouent pas avec l'appareil.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation. Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.