

Fitting Instructions


1. Position the electronic control unit in the cab or under the bonnet, away from direct heat. An ideal location on many tractors is between the radiator and the front grill. Secure with the cable ties provided.
2. Connect the power lead (with fuse) directly to a 12 volt battery. Red cable goes to positive (+) terminal on battery. Plug the other end into power socket on the control unit- a green light will flash. Switch to "Auto" so that it doesn't activate while the engine is running.
3. The siren speaker should be mounted near the problem area with the cable ties provided and faced downwards to prevent water damage. Keep away from direct heat (e.g. exhaust manifold). Plug the lead into one of the siren sockets on control unit and it will immediately activate.

The alarm will emit a series of warning beeps followed by a blast on a randomised time cycle of less than 6 minutes. The unit can be disarmed by simply removing the power lead to the control unit.

A power supply lead to plug into a cigarette lighter socket is available as an optional extra.

Other Options:

1. An On/Off switch could be fitted to dashboard for manual control from tractor seat
2. A 12 volt digital timer can be fitted to prevent night time operation.

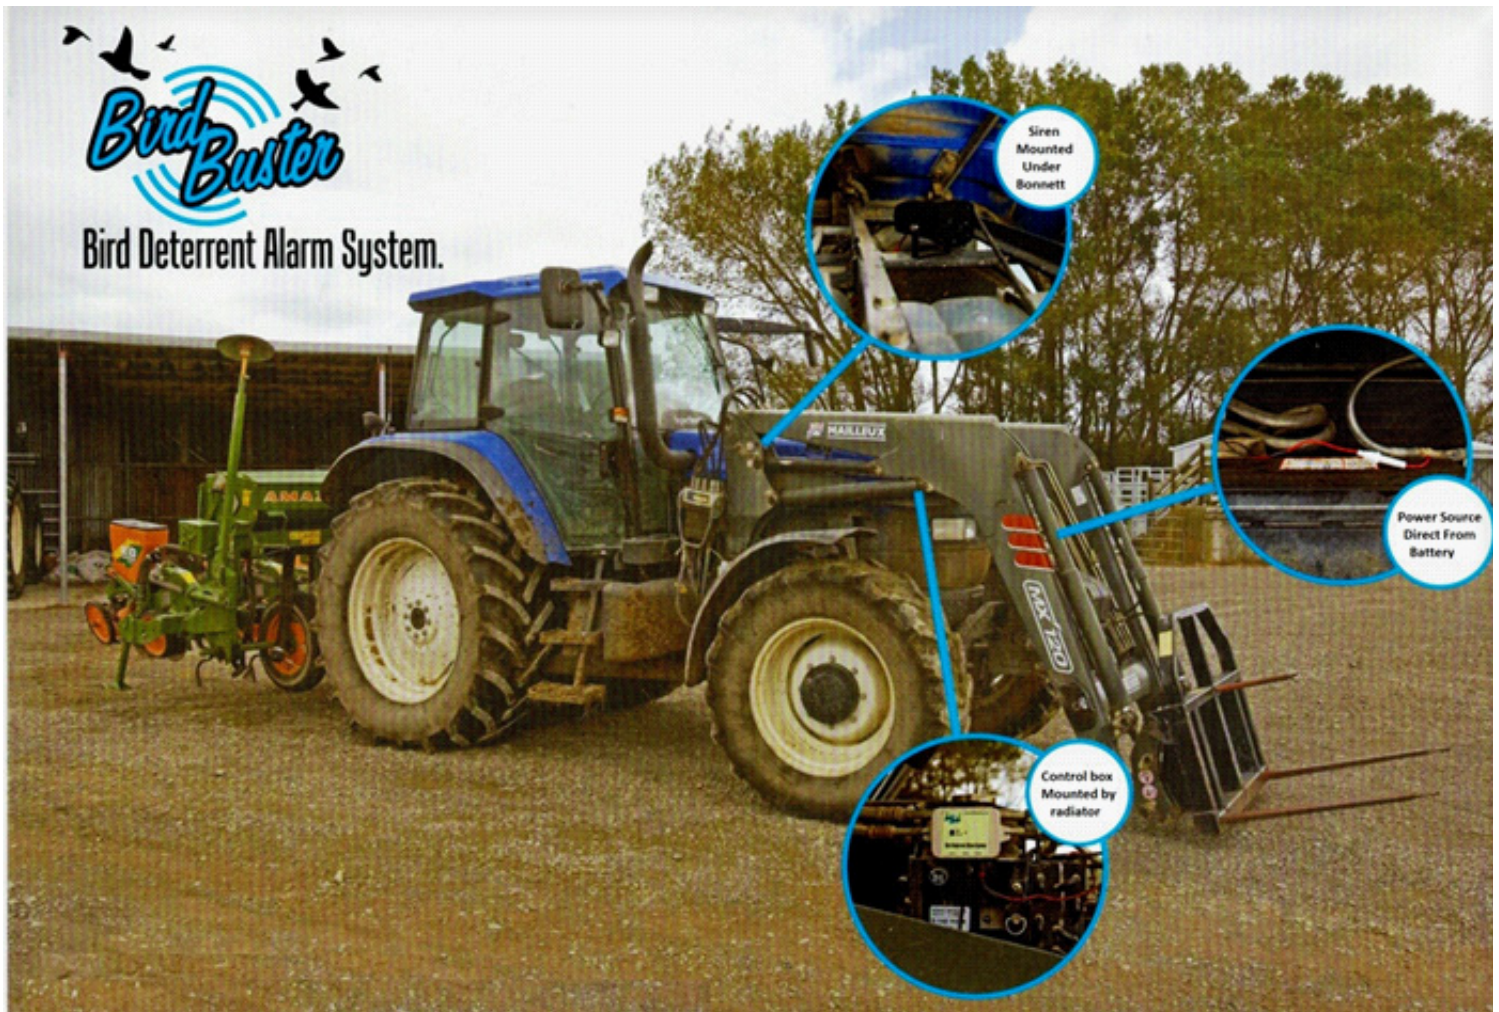

Disclaimer.

Pestgard takes no responsibility for damage to vehicles caused by birds. The owner or operator uses this deterrent strictly under this condition and needs to always check equipment before starting.

