

LED Strobe Lights

SL-1301-BAQ

The SL-1301-BAQ has a long operating life and 6 programmable flash patterns, making it suitable for several indoor and outdoor applications.


Features:

- ▶ Operating life of over 50,000 hours (5.7 years)
- ▶ Low maintenance
- ▶ 6 Different flash patterns
- ▶ IP66 weatherproof rating for indoor or outdoor use
- ▶ Flashes like a strobe or rotates like a beacon
- ▶ Adjustable flashing speed
- ▶ Can be used as emergency strobe or continuous-use warning indicator
- ▶ Omni-directional—visible in all directions
- ▶ 9-Volt backup battery option for continuous operation

IP66
Weatherproof



Dimensions:

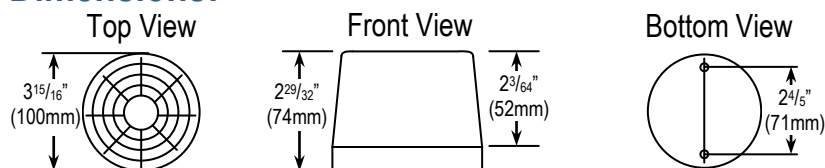

Note: The SL-1301 series LED strobe light has the same dimensions as the SL-126 series strobe light.

Available in 5 Different Colors:

- SL-1301-BAQ/A Amber
- SL-1301-BAQ/B Blue
- SL-1301-BAQ/C Clear
- SL-1301-BAQ/R Red
- SL-1301-BAQ/G Green

Specifications:

		SL-1301-BAQ
# of LED strips		5
Operating voltage	/R	6~14VDC
	/A, /B, /C, /G models	9~14VDC
Current drain		60~200mA@12VDC
Adjustable flashing speed		30~260 flashes/minute
Operating life		Over 50,000 hours
Operating temperature		-4°~158° F (-20°~70° C)
Electrical protection		Reverse polarity protection
IP rating		IP66
Backup battery life	Steady ON	Up to 2 hours*
	Strobe/Flashing	Up to 4 hours*

*Estimated



The SL-1301-BAQ has 5 LED strips with 4 LEDs on each strip.

Flashing Patterns

There are **6 different flash patterns** programmable via the DIP switch on the circuit board. Speed is programmed using the control pot.

	Description	Side View	Top View
1	<p style="text-align: center;">Strobe</p> <p>LEDs flash on and off continuously.</p>		
2	<p style="text-align: center;">Steady ON</p> <p>All LEDs stay on. Ideal for continuous lighting applications.</p>		
3	<p style="text-align: center;">Rotate Back and Forth</p> <p>LED groups light up one at a time, rotating clockwise and counterclockwise.</p>		
4	<p style="text-align: center;">Rotate Clockwise</p> <p>Light rotates clockwise in a circular fashion continuously. (Beacon)</p>		
5	<p style="text-align: center;">Flash with Progressive ON</p> <p>LEDs turn on progressively clockwise until all LEDs are lit (sweep), and then turn off.</p>		
6	<p style="text-align: center;">Flash with Progressive ON/OFF</p> <p>LEDs turn on progressively clockwise (sweep), then turn off progressively clockwise.</p>		