


Quick User Guide

REV1.0

1.Packing List


Unpack and make sure the unit is in perfect condition and comes with all of the following accessories

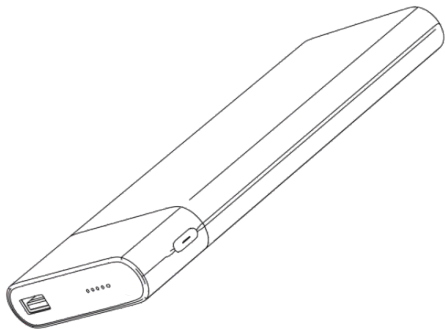

1 x Smart Power Bank Voice Recorder



1 x Micro card set



1 x USB Type-c Cable



1 x Quick User Guide

2. Operation Instruction


4G Indicator Light

Light off: Turn off

Light solid: Turn on


Light blink: No signal

(No SIM card inserted/ SIM card not inserted properly / Error card)

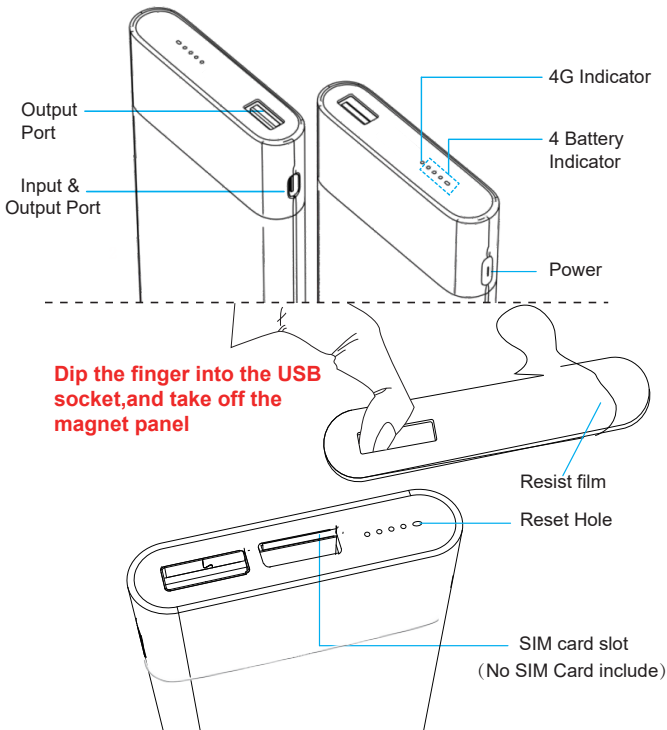

3. How to use

Please insert SIM card 1 into the device.

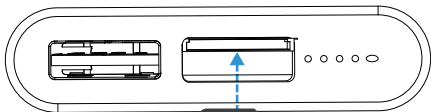


Please use a Micro SIM card
size 12x15mm
Or use with Micro card sets

NOT support Nano/standard card





Correct

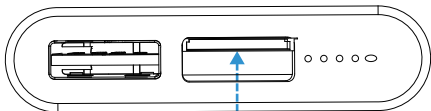

Wrong

1 Check Device's Power

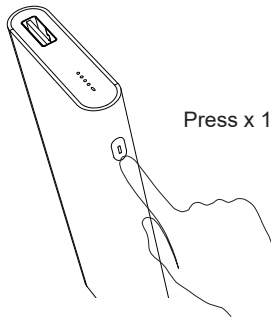



4G Indicator Light

Battery light

**PS: It is recommended to use an
adapter above 20W to quickly
input 10000mAh in 2 hours.**



Press power button once, the light is on, you can check the battery level and whether the 4G indicator light is working

2 Start the device

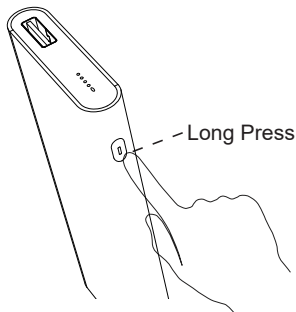


Long press 1.5s, the 4G indicator light will be solid.
Waiting for the indicator blink, and the system all via SMS.
In 60s, the light will be off.

3 Turn Off



Long press 3s, the 4G indicator light will turn off.
Waiting for 10s, the system will be closed.

4 Reset

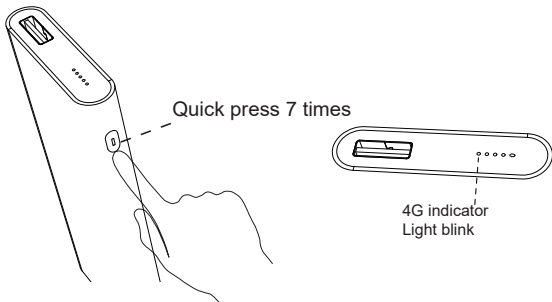

Quick press power button 7 times to restore the factory value. The 4G indicator light will blink, and the device will be reset.

4. Configure Device

About the device

- 1) **All control commands must be via SMS by 2 SIM cards.**
(SIM card1 for the device, card2 for customer's phone)
- 2) The message will be received about 1-2 minutes after the connection is successful.
- 3) One device can only correspond to 3 phone number
(Dial 3 times in a loop, stop dialing after answering)
- 4) Only main number have the call on/off, message on/off control, and the semicolon has the command to query the device status;
- 5) **SMS commands are not case-sensitive, but there must be a space in the middle.**
- 6) When adding an incorrect command, there is a prompt "invalid command".
- 7) Quick press power button 7 times to restore the factory value and restart.

1.Admin Mode

Control commands all via SMS

Customer's Phone send message to recorder device's

NEED 2 SIM Card Number:

Recorder device's insert SIM card1.

Customer's Phone insert SIM card2.

Call Number Setup:

Customer's phone: call 079***** (Your card2 Phone number)

Device's reply: pass word? (Wait for device automatically reply)

Customer's phone: admin (Default password: admin)

Device's reply: Confirm?

Customer's phone: yes

Device's reply: Call No Set to 079***** success

Delete Call Number:

Customer: del 079*****

Device: del "079*****" success

2.Password Setting

Customer: Password 123456

Device: Password set to 123456 success

(the password with more than 6 digits)

3.Alarm Mode

Call on: The device will call customer when detected a voice

Message on: When voice is detected, the device will send an alert message to the customer

Setup:

Customer: Call on

Device: Call on success

Customer: Call off


Device: Call off success

Customer: message on

Device: message on success

Customer: message off

Device: message off success

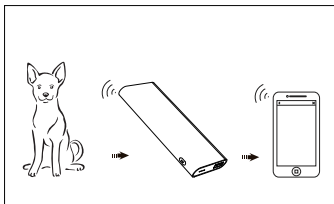

4.Sound Sensitivity

(H: High sensitive, M: Middle, L: Least sensitive, Default: L)

Setup:

Customer: Voxsens L

Device: Voxsens set L success

5.Default Mode

(H: High sensitive, M: Middle, L: Least sensitive, Default: L)

Setup:

Customer: Default

Device: Default success

FW: 1.0.2,CALL No: , CALL: ON, MESSAGE: OFF,
VOXSENS: M, PASSWORD:admin, BATTERY: 91%

6.Device Information

(H: High sensitive, M: Middle, L: Least sensitive, Default: L)

Setup:

Customer: status

Device:

FW: 1.0.2, CALL No: , CALL: ON, MESSAGE: OFF,
VOXSENS: M, PASSWORD: admin, BATTERY: 91%

7.Help

When you need to check the device function, send the
HELP command

Customer: help

Device:

- 1.Set call No
- 2.Charge New Phone No
- 3.Set Del No
- 4.Sensitivity setting
- 5.Device info setting
- 6.Pass word
- 7.Manual Reset
- 8.Alarm mode on /off setting
- 9.Password setting

Customer: 2

Device:

"Customer: del 079*****

Device: del call no 079***** success"



RoHS

