


## 93+ Supra 1-Piece CV Driveshaft

## Not checking this will void the warranty:

EXTREMELY IMPORTANT

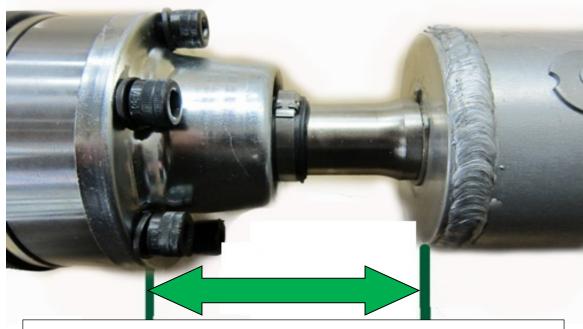

Driveshaft CV Clearance <u>MUST BE CHECKED</u> after installation. 1993-1998 Supra (Auto / Manual) must be between <u>3.25" – 3.75"</u> If dimension is not within the allowed range, do not run the driveshaft

> Adapter plate Hardware Torque: Front: (4) 7/16" Bolts 70 ft-lbs / (4) M10 Bolts 57 ft-lbs Rear: (3) 7/16" Bolts 70 ft-lbs / (4) 3/8 Bolts 54 ft-lbs