


INSTRUCTIONS F SERIES LED GROW LIGHTS

DIMMABLE WITH DAISY CHAIN FEATURE



WARNING: RISK OF FIRE OR ELECTRIC SHOCK
 Read and follow all safety instructions before using.
 Failure to follow instructions could result in serious injury or death.

- Do not make any alterations to the fixture, power cord, or power plug, and do not replace power plug under any circumstances.
- Receptacle on this fixture is for linking multiple lights only. Do not connect any other devices to this receptacle, as this may cause damage to the unit and create a safety hazard.
- Fixture must be installed and used in accordance with the NEC (National Electric Code) and all local codes.
- Ensure supply voltage is equal to the rated voltage of the fixture (120V-277V).
- Fixture is rated for damp and dry locations only. Do not use where directly exposed to water.
- Do not use in hazardous environments (e.g. corrosive gases, explosive gases, etc.)
- Always use included safety cable to securely attach fixture to a support capable of supporting at least 200W 14 lbs, 400W 25.5 lbs, 600W 33.1 lbs.
- Disconnect power and make sure LEDs and drivers are cool to touch before performing maintenance.




Operating Information

Electrical rating of this product is 120V-277AC
 Ambient operating temperature (-22°F to 122°F)

Electrical Parameters


Model No.	Lamp Dimensions	Input Wattage	Input Voltage	Fixture Weight	The Maximum Numbers of Daisy Chain
FLARE- 200W	12.2"L×13.3"W×5.5"H	200W	120V-277V	13.9 lbs	7-8 PCS
FLARE- 400W	23.3"L×13.3"W×5.5"H	400W	120V-277V	25.4lbs	3-4 PCS
FLARE- 600W	34.5"L×13.3"W×5.5"H	600W	120V-277V	33.1 lbs	2 PCS

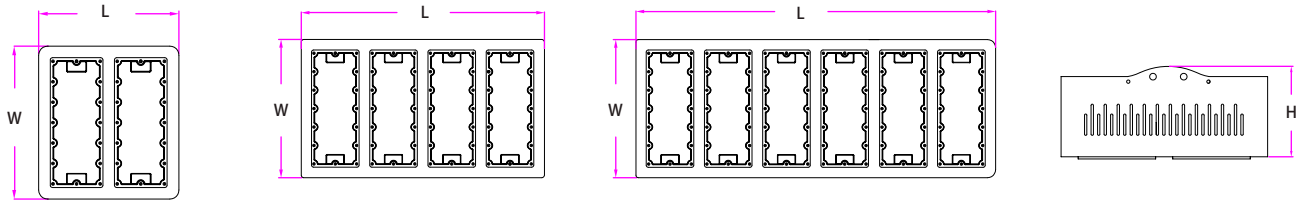

Installation diagram


Step:1

First install the ear hooks on both sides



Step:2

Ensure wall or fixed object is strong enough to hold 200W 14 lbs, 400W 25.5lbs, 600W 33.1lbs
 Adjust to the required height.



Step:3

Connect plug with socket to join two or more lamps together

