Product Specification

100 Watt Led Retrofit Kit

Main Features

- 1,5 years warranty
- 2, With a big Sunon fan
- 3,With beam angle 120 degree
- 4, Original super bright 3030 LED
- 5, Arm adjustable with any beam angle
- 6, With the most excellent quality meanwell driver
- 7, Available running under 120-277VAC
- 8, Avaiable for street light fixtures application
- 9, Using aluminum fin heat sink which heat transfer faster than die cast
- 10, Tiny package and lighter, lower freight cost, more competitive in the market


Main Data



Outer Dimension


E39 shortest size	9.84''*5.47''
E39 longest size	12.59''*5.47''

Model NO.	LSRK-100WXY	
Chip Type	RF-Q30RA**A-07-C2	
Driver type	Meanwell Driver	
Luminous flux	3000K11,800Lm 4000K12,540Lm 4500k12,650Lm 5000K13,000Lm 5700K13,500Lm	
Input voltage	120-277VAC	
Life Span	50,000hours	
Beam Angle	120 °	
Power Factor	>0.97	
Color Temp	3000/4000/4500/5000/5700K	
IP rating	Inside sealed fixture	



тм

copyright reserved






Shortest size 11111 9999<u>5</u>

LAMPSHINING

Add:Runteng Shangpai industrial Zone,Yonghe Road,Shiyan Town,Bao'an District,Shenzhen Guangdong PR China Tel: 0086-0755-33556070 0086-13612945445 Email: sales@lampshining.com william@lampshining.com skype:lampshining87 Web: http://www.lampshining.com www.ledlampshining.com

Product Specification

Main Construction Features

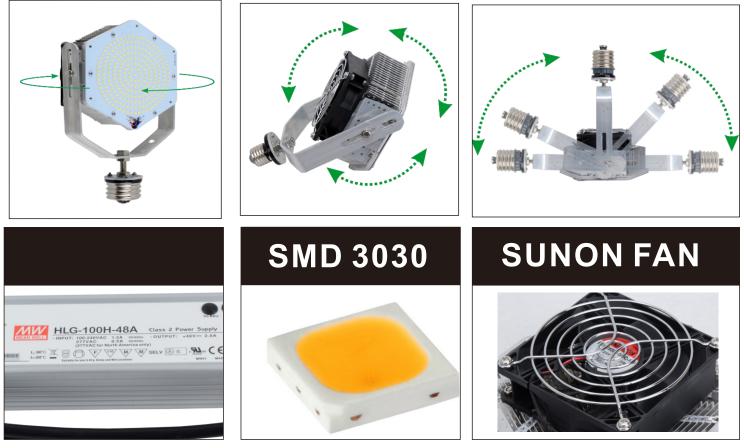

Accessories

1,When you are using this led retrofit kit in the canopy,wall pack and parking lot shoebox fixture, you may need a kit to have the driver fixed (Pic 1)

- 2,When you have less space to put a lamp with E26 or E39 base,you may choose to use the arm fixed kit(Pic 2)
- 3, When your traditional fixture has a E40 lamp socket, you may need an adaptor (Pic 3)



Product Specification

What to be aware of (Cautions)

- 1. Read the user's manual in detail, make sure product fits environmental condition.
- 2. Cut the power off before installation
- 3. DO NOT PRESS the LED chip, or it will lead to LED Chip died
- 4. E39/E26 Lamp base is ELECTRICITY FREE
- 5. Connect the lamp along with meanwell driver before it's connected with power
- 6. Do not install this LED retrofit kit where ambient temperatures exceed 55 degrees Celsius or over corrosive gas
- 7. Indoor, Outdoor use in outdoor luminaires (minimum Ip65)
- 8. Don't throw away casually

Package details

L * W * H Gross Weight Package qty	32*27*16cm 0.8kg 1pc/CTN
L * W * H Gross Weight Package qty	63*60*32cm 14.8kg 8pcs/CTN



Add:Runteng Shangpai industrial Zone,Yonghe Road,Shiyan Town,Bao'an District,Shenzhen Guangdong PR China Tel: 0086-0755-33556070 0086-13612945445 Email: sales@lampshining.com william@lampshining.com skype:lampshining87 Web: http://www.lampshining.com www.ledlampshining.com