



# 2" LED Downlight Series DLR2 | DQR2 | DLG2

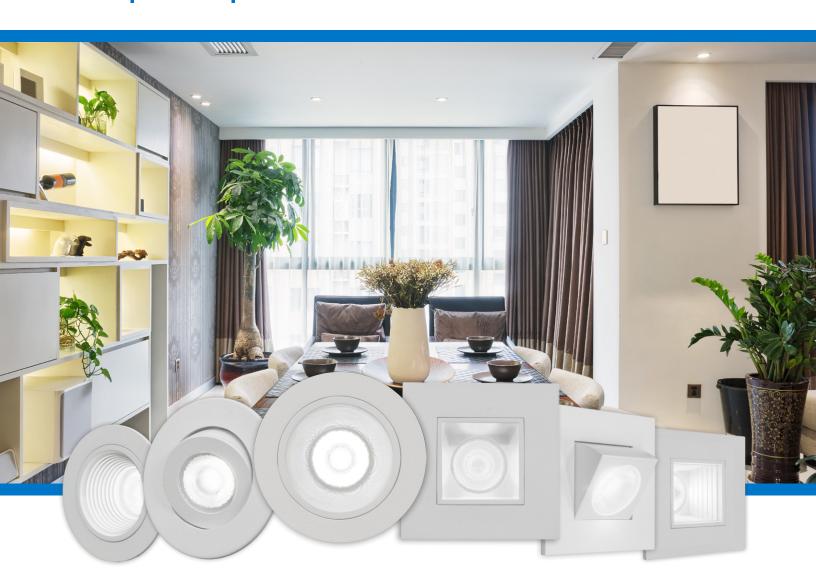


Small lights. Big impact.

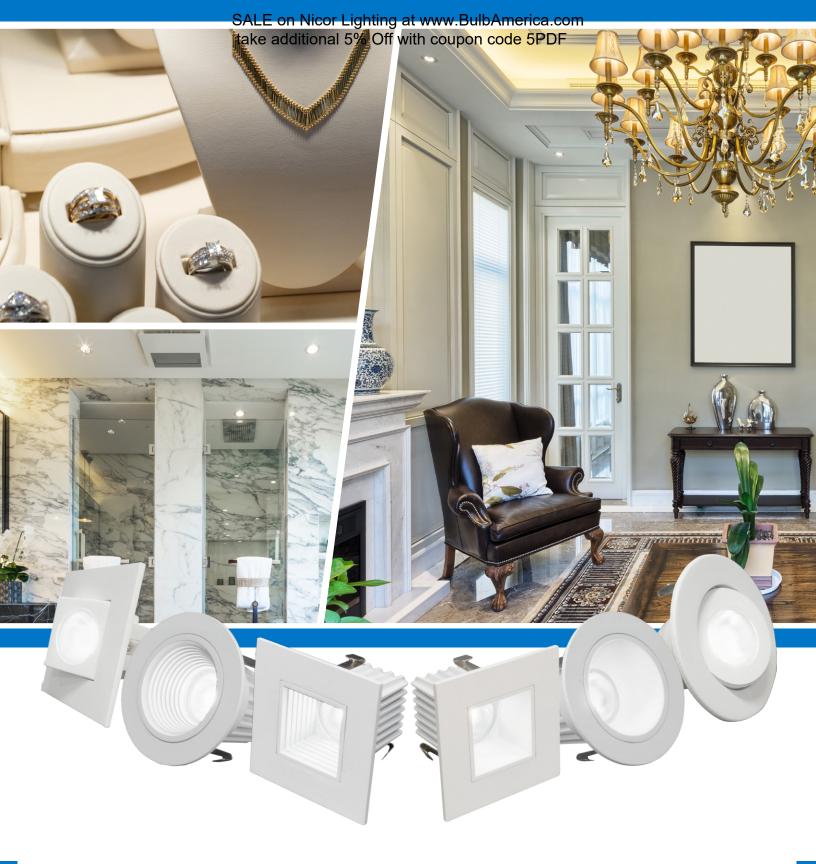

**NICOR's D-Series luminaires** offer a comprehensive family of LED downlight fixtures that complement one another regardless of your design space needs. The new 2" family packs a punch with its small, elegant design along with its high lumen output. Not only does this family work perfectly for accent

and task lighting, but the lighting output allows you to bring general ambient lighting into a space with a very small, elegant appearance. From LED color rendering and trim finishes to fixture performance, this series is a perfect choice for commercial, retail, institutional, and residential applications.

# DLR<sub>2</sub> 2" Recessed **LED** Downlight















**TRIM OPTIONS** 

WHITE

NICKEL

BLACK

DLR2



# **TRIM OPTIONS**

• Smooth Baffle •







2" Recessed **LED** Downlight w/baffle



2.75in (70mm)



3.125in (79mm)

TRIM OPTIONS





2" **LED** Downlight Square















# **TRIM OPTIONS**


**TRIM OPTIONS** 

Smooth Baffle •



# DQR2

2" **LED** Downlight Square w/baffle

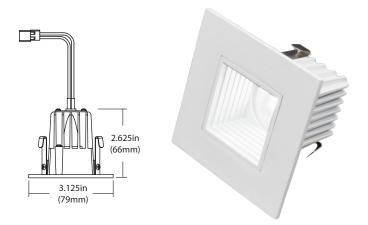














**TRIM OPTIONS** WHITE

# **DQR2-AA**

# 2" **LED** Adjustable Downlight Square

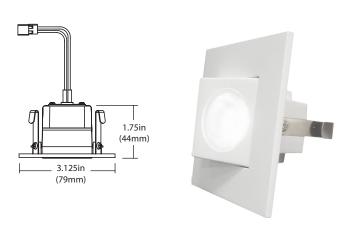















TRIM OPTIONS











### **Adjustable Wall Wash**


DQR2-AA and DLG2 both offer adjustable trims to provide wall wash lighting.







# 2" **LED** Downlight Gimbal





















**Beam Angle Options** 

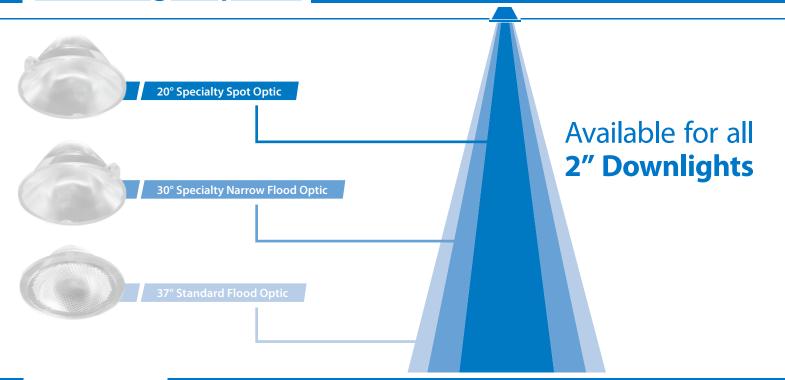

# **Features**

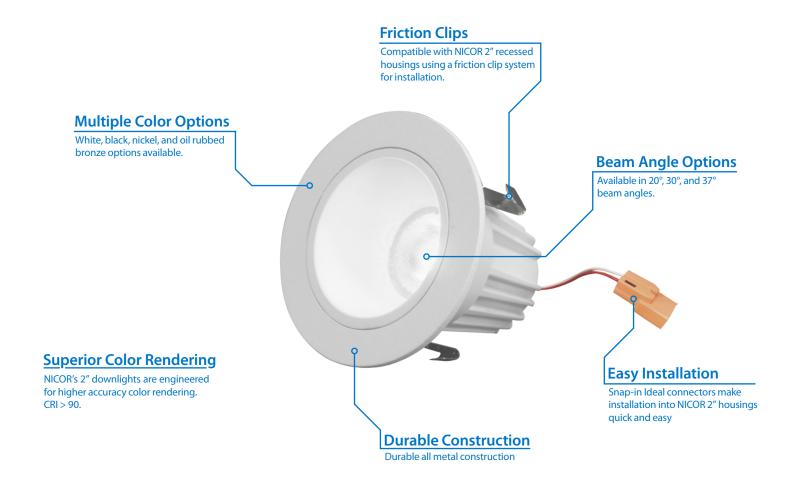

#### Construction

- Cast aluminum trim routes heat away from electrical components
- NICOR 2" LED housing required for use of 2" LED Downlight Series

#### **Optical System**

- Optical lens diffusers eliminate "hot spots" and provide smooth, uniform light
- Beam spread options available: Standard Flood, Narrow Flood, and Spot

#### Electrica

- $\bullet$  Utilizes high performing LEDs with greater than 90 CRI and an R9 greater than 50
- Dimmable to 10% with most standard triac dimmers
- $\bullet$  Operating temperature rating of 0°F to 120°F (-18°C to 49°C)
- Lifetime rated for greater than 35,000 hours
- LM-79, LM-80 testing performed in accordance with IESNA standards
- 120V input to driver

#### **Finish**

- $\bullet$  Exterior white powder coat finish
- Also available in Black, Oil-Rubbed Bronze and Nickel

#### Installation

- NICOR's 2" recessed housings required: Available in remodel, new construction, and IC/ Airtight new construction
- Quick and easy installation with a snap-in IDEAL connector and friction clip mounting system

#### Warranty

• 5-year limited system warranty standard

Product Information	DLR2	DQR2	DQR2-AA	DLG2
LED Lifetime:	35,000 hrs	35,000 hrs	35,000 hrs	35,000 hrs
Input Voltage: (input to driver located in 2" housing)	120V	120V	120V	120V
Power Draw:	9W	9W	9W	9W
Delivered Lumens*:	680 Lm	631 Lm	696 Lm	700 Lm
System Efficacy*:	78 Lm/W	71 Lm/W	81 Lm/W	82 Lm/W
Correlated Color Temp:	3000K	3000K	3000K	3000K
Color Rendering Index:	93 CRI	93 CRI	92 CRI	92 CRI

<sup>\*</sup> Performance data shown at 3000K For more information, visit www.nicorlighting.com











DLG2 & DQR2-AA not Wet Location Rated

ORDERING INFORMATION Example: DLR2-10-120-3K-WH-BF-NF						
Series	Version	Housing Input Voltage	CCT's	Trim	Baffle	Optics
DLR2	<b>10 (</b> v 1.0)	120 (V)	<b>2K</b> (2700)	WH (white)	blank (no baffle)	blank (37° Standard Optic)
DQR2			<b>3K</b> (3000)	BK (black)*	BF (baffle)**	<b>NF</b> (30° Narrow Optic)
DQR2-AA			<b>4K</b> (4000)	NK (nickel)*		SP (20° Spot Optic)
DLG2				<b>OB</b> (oil-rubbed bronze)*		

<sup>\*</sup> only available as special order. Contact NICOR for more info. \*\* only available for DLR2 and DQR2.

# **LED** Housings

### **Remodel Housing**



### 5 YEAR WARRANTY



ORDERING INFORMATION		
Catalog Number	Description	
12202R-LED	2" LED Remodel Housing	

### **New Construction Housing**



# ORDERING INFORMATION Catalog Number 12201-LED 2" LED New Construction Housing

## **New Construction IC Rated Housing**











ORDERING INFORMATION		
Catalog Number	Description	
12200A-LED	2" LED IC/AT New Construction Housing	

#### **Warehouse Locations**

Albuquerque NM Atlanta GA Detroit MI Miami FL San Antonio TX Syracuse NY T 800.821.6283

F 800.892.8393 www.nicorlighting.com

2200 Midtown Place NE Albuquerque NM 87107 USA



LIT-2IN 0516
©2016 NICOR® • ALL RIGHTS RESERVED

