

SURFACE MOUNT SLIM

ROUND & SQUARE

4"/5", 6"/7", 9"



4"



5"



6"



7"



9"



9"



12"





















SPECIFICATIONS

ELECTRICAL

		MODEL	DESCRIPTION	POWER	INPUT VOLTS	DIMMABLE	FREQUENCY	LUMEN EFFICACY	LIFETIME
4"/5"	WHITE	LR23609	LED10/SLIM4/30K/W/SQ	10	120V	TRIAC	50/60Hz	60.0	50,000
		LR23610	LED10/SLIM4/40K/W/SQ	10	120V	TRIAC	50/60Hz	60.0	50,000
		LR23611	LED10/SLIM4/50K/W/SQ	10	120V	TRIAC	50/60Hz	60.0	50,000
	BLACK	LR23612	LED10/SLIM4/30K/B/SQ	10	120V	TRIAC	50/60Hz	60.0	50,000
		LR23613	LED10/SLIM4/40K/B/SQ	10	120V	TRIAC	50/60Hz	60.0	50,000
		LR23614	LED10/SLIM4/50K/B/SQ	10	120V	TRIAC	50/60Hz	60.0	50,000
	NICKEL	LR23615	LED10/SLIM4/30K/N/SQ	10	120V	TRIAC	50/60Hz	60.0	50,000
		LR23616	LED10/SLIM4/40K/N/SQ	10	120V	TRIAC	50/60Hz	60.0	50,000
		LR23617	LED10/SLIM4/50K/N/SQ	10	120V	TRIAC	50/60Hz	60.0	50,000
	WHITE	LR23600	LED10/SLIM5/30K/W/RD	10	120V	TRIAC	50/60Hz	60.0	50,000
		LR23601	LED10/SLIM5/40K/W/RD	10	120V	TRIAC	50/60Hz	60.0	50,000
		LR23602	LED10/SLIM5/50K/W/RD	10	120V	TRIAC	50/60Hz	60.0	50,000
	BLACK	LR23603	LED10/SLIM5/30K/B/RD	10	120V	TRIAC	50/60Hz	60.0	50,000
		LR23604	LED10/SLIM5/40K/B/RD	10	120V	TRIAC	50/60Hz	60.0	50,000
		LR23605	LED10/SLIM5/50K/B/RD	10	120V	TRIAC	50/60Hz	60.0	50,000
	NICKEL	LR23606	LED10/SLIM5/30K/N/RD	10	120V	TRIAC	50/60Hz	60.0	50,000
LR23607		LED10/SLIM5/40K/N/RD	10	120V	TRIAC	50/60Hz	60.0	50,000	
LR23608		LED10/SLIM5/50K/N/RD	10	120V	TRIAC	50/60Hz	60.0	50,000	

PHOTOMETRIC

GENERAL

MODEL	COLOR (CCT)	TEMP	LUMEN	CRI	FLOOD	CASE	FINISH	DAMP LOCATION	COST/YR	ENERGY STAR
LR23609	3000K	SOFT WHITE	600	80	90°	20	WHITE	YES	\$ 1.20	
LR23610	4000K	COOL WHITE	600	80	90°	20	WHITE	YES	\$ 1.20	
LR23611	5000K	BRIGHT WHITE	600	80	90°	20	WHITE	YES	\$ 1.20	
LR23612	3000K	SOFT WHITE	600	80	90°	20	BLACK	YES	\$ 1.20	
LR23613	4000K	COOL WHITE	600	80	90°	20	BLACK	YES	\$ 1.20	
LR23614	5000K	BRIGHT WHITE	600	80	90°	20	BLACK	YES	\$ 1.20	
LR23615	3000K	SOFT WHITE	600	80	90°	20	NICKEL	YES	\$ 1.20	
LR23616	4000K	COOL WHITE	600	80	90°	20	NICKEL	YES	\$ 1.20	
LR23617	5000K	BRIGHT WHITE	600	80	90°	20	NICKEL	YES	\$ 1.20	
LR23600	3000K	SOFT WHITE	600	80	90°	20	WHITE	YES	\$ 1.20	
LR23601	4000K	COOL WHITE	600	80	90°	20	WHITE	YES	\$ 1.20	
LR23602	5000K	BRIGHT WHITE	600	80	90°	20	WHITE	YES	\$ 1.20	
LR23603	3000K	SOFT WHITE	600	80	90°	20	BLACK	YES	\$ 1.20	
LR23604	4000K	COOL WHITE	600	80	90°	20	BLACK	YES	\$ 1.20	
LR23605	5000K	BRIGHT WHITE	600	80	90°	20	BLACK	YES	\$ 1.20	
LR23606	3000K	SOFT WHITE	600	80	90°	20	NICKEL	YES	\$ 1.20	
LR23607	4000K	COOL WHITE	600	80	90°	20	NICKEL	YES	\$ 1.20	
LR23608	5000K	BRIGHT WHITE	600	80	90°	20	NICKEL	YES	\$ 1.20	



















SPECIFICATIONS

ELECTRICAL

6" / 7"		MODEL	DESCRIPTION	POWER	INPUT VOLTS	DIMMABLE	FREQUENCY	LUMEN EFFICACY	LIFETIME
		WHITE	LR23627	LED15/SLIM6/30K/W/SQ	15	120V	TRIAC	50/60Hz	63.3
	LR23628	LED15/SLIM6/40K/W/SQ	15	120V	TRIAC	50/60Hz	63.3	50,000	
	LR23629	LED15/SLIM6/50K/W/SQ	15	120V	TRIAC	50/60Hz	63.3	50,000	
BLACK	LR23630	LED15/SLIM6/30K/B/SQ	15	120V	TRIAC	50/60Hz	63.3	50,000	
	LR23631	LED15/SLIM6/40K/B/SQ	15	120V	TRIAC	50/60Hz	63.3	50,000	
	LR23632	LED15/SLIM6/50K/B/SQ	15	120V	TRIAC	50/60Hz	63.3	50,000	
NICKEL	LR23633	LED15/SLIM6/30K/N/SQ	15	120V	TRIAC	50/60Hz	63.3	50,000	
	LR23634	LED15/SLIM6/40K/N/SQ	15	120V	TRIAC	50/60Hz	63.3	50,000	
	LR23635	LED15/SLIM6/50K/N/SQ	15	120V	TRIAC	50/60Hz	63.3	50,000	
WHITE	LR23618	LED15/SLIM7/30K/W/RD	15	120V	TRIAC	50/60Hz	66.7	50,000	
	LR23619	LED15/SLIM7/40K/W/RD	15	120V	TRIAC	50/60Hz	66.7	50,000	
	LR23620	LED15/SLIM7/50K/W/RD	15	120V	TRIAC	50/60Hz	66.7	50,000	
BLACK	LR23621	LED15/SLIM7/30K/B/RD	15	120V	TRIAC	50/60Hz	66.7	50,000	
	LR23622	LED15/SLIM7/40K/B/RD	15	120V	TRIAC	50/60Hz	66.7	50,000	
	LR23623	LED15/SLIM7/50K/B/RD	15	120V	TRIAC	50/60Hz	66.7	50,000	
NICKEL	LR23624	LED15/SLIM7/30K/N/RD	15	120V	TRIAC	50/60Hz	66.7	50,000	
	LR23625	LED15/SLIM7/40K/N/RD	15	120V	TRIAC	50/60Hz	66.7	50,000	
	LR23626	LED15/SLIM7/50K/N/RD	15	120V	TRIAC	50/60Hz	66.7	50,000	
	LR23640	LED/SLIM4-5/CAN-ADAPTER							
	LR23645	LED/SLIM6-7/CAN-ADAPTER							

PHOTOMETRIC

GENERAL

MODEL	COLOR (CCT)	TEMP	LUMEN	CRI	FLOOD	CASE	FINISH	DAMP LOCATION	COST/YR	ENERGY STAR
LR23627	3000K	SOFT WHITE	950	80	90°	20	WHITE	YES	\$ 1.81	
LR23628	4000K	COOL WHITE	950	80	90°	20	WHITE	YES	\$ 1.81	
LR23629	5000K	BRIGHT WHITE	950	80	90°	20	WHITE	YES	\$ 1.81	
LR23630	3000K	SOFT WHITE	950	80	90°	20	BLACK	YES	\$ 1.81	
LR23631	4000K	COOL WHITE	950	80	90°	20	BLACK	YES	\$ 1.81	
LR23632	5000K	BRIGHT WHITE	950	80	90°	20	BLACK	YES	\$ 1.81	
LR23633	3000K	SOFT WHITE	950	80	90°	20	NICKEL	YES	\$ 1.81	
LR23634	4000K	COOL WHITE	950	80	90°	20	NICKEL	YES	\$ 1.81	
LR23635	5000K	BRIGHT WHITE	950	80	90°	20	NICKEL	YES	\$ 1.81	
LR23618	3000K	SOFT WHITE	1000	80	90°	20	WHITE	YES	\$ 1.81	
LR23619	4000K	COOL WHITE	1000	80	90°	20	WHITE	YES	\$ 1.81	
LR23620	5000K	BRIGHT WHITE	1000	80	90°	20	WHITE	YES	\$ 1.81	
LR23621	3000K	SOFT WHITE	1000	80	90°	20	BLACK	YES	\$ 1.81	
LR23622	4000K	COOL WHITE	1000	80	90°	20	BLACK	YES	\$ 1.81	
LR23623	5000K	BRIGHT WHITE	1000	80	90°	20	BLACK	YES	\$ 1.81	
LR23624	3000K	SOFT WHITE	1000	80	90°	20	NICKEL	YES	\$ 1.81	
LR23625	4000K	COOL WHITE	1000	80	90°	20	NICKEL	YES	\$ 1.81	
LR23626	5000K	BRIGHT WHITE	1000	80	90°	20	NICKEL	YES	\$ 1.81	



















SPECIFICATIONS

ELECTRICAL

9"	FINISH	MODEL	DESCRIPTION	POWER	INPUT VOLTS	DIMMABLE	FREQUENCY	LUMEN EFFICACY	LIFETIME
		WHITE	LR23650	LED18/SLIM9/30K/W/RD	18	120V	TRIAC	50/60Hz	66.7
WHITE	LR23651	LED18/SLIM9/40K/W/RD	18	120V	TRIAC	50/60Hz	66.7	50,000	
WHITE	LR23652	LED18/SLIM9/50K/W/RD	18	120V	TRIAC	50/60Hz	66.7	50,000	
BLACK	LR23653	LED18/SLIM9/30K/B/RD	18	120V	TRIAC	50/60Hz	66.7	50,000	
BLACK	LR23654	LED18/SLIM9/40K/B/RD	18	120V	TRIAC	50/60Hz	66.7	50,000	
BLACK	LR23655	LED18/SLIM9/50K/B/RD	18	120V	TRIAC	50/60Hz	66.7	50,000	
NICKEL	LR23656	LED19/SLIM9/30K/N/RD	18	120V	TRIAC	50/60Hz	66.7	50,000	
NICKEL	LR23657	LED19/SLIM9/40K/N/RD	18	120V	TRIAC	50/60Hz	66.7	50,000	
NICKEL	LR23658	LED19/SLIM9/50K/N/RD	18	120V	TRIAC	50/60Hz	66.7	50,000	
WHITE	LR23659	LED18/SLIM9/30K/W/SQ	18	120V	TRIAC	50/60Hz	66.7	50,000	
WHITE	LR23660	LED18/SLIM9/40K/W/SQ	18	120V	TRIAC	50/60Hz	66.7	50,000	
WHITE	LR23661	LED18/SLIM9/50K/W/SQ	18	120V	TRIAC	50/60Hz	66.7	50,000	
BLACK	LR23662	LED18/SLIM9/30K/B/SQ	18	120V	TRIAC	50/60Hz	66.7	50,000	
BLACK	LR23663	LED18/SLIM9/40K/B/SQ	18	120V	TRIAC	50/60Hz	66.7	50,000	
BLACK	LR23664	LED18/SLIM9/50K/B/SQ	18	120V	TRIAC	50/60Hz	66.7	50,000	
NICKEL	LR23665	LED18/SLIM9/30K/B/SQ	18	120V	TRIAC	50/60Hz	66.7	50,000	
NICKEL	LR23666	LED18/SLIM9/40K/B/SQ	18	120V	TRIAC	50/60Hz	66.7	50,000	
NICKEL	LR23667	LED18/SLIM9/50K/B/SQ	18	120V	TRIAC	50/60Hz	66.7	50,000	

PHOTOMETRIC

GENERAL

MODEL	COLOR (CCT)	TEMP	LUMEN	CRI	FLOOD	CASE	FINISH	DAMP LOCATION	COST/YR	ENERGY STAR
LR23650	3000K	SOFT WHITE	1200	80	90°	20	WHITE	YES	\$ 2.17	
LR23651	4000K	COOL WHITE	1200	80	90°	20	WHITE	YES	\$ 2.17	
LR23652	5000K	BRIGHT WHITE	1200	80	90°	20	WHITE	YES	\$ 2.17	
LR23653	3000K	SOFT WHITE	1200	80	90°	20	BLACK	YES	\$ 2.17	
LR23654	4000K	COOL WHITE	1200	80	90°	20	BLACK	YES	\$ 2.17	
LR23655	5000K	BRIGHT WHITE	1200	80	90°	20	BLACK	YES	\$ 2.17	
LR23656	3000K	SOFT WHITE	1200	80	90°	20	NICKEL	YES	\$ 2.17	
LR23657	4000K	COOL WHITE	1200	80	90°	20	NICKEL	YES	\$ 2.17	
LR23658	5000K	BRIGHT WHITE	1200	80	90°	20	NICKEL	YES	\$ 2.17	
LR23659	3000K	SOFT WHITE	1200	80	90°	20	WHITE	YES	\$ 2.17	
LR23660	4000K	COOL WHITE	1200	80	90°	20	WHITE	YES	\$ 2.17	
LR23661	5000K	BRIGHT WHITE	1200	80	90°	20	WHITE	YES	\$ 2.17	
LR23662	3000K	SOFT WHITE	1200	80	90°	20	BLACK	YES	\$ 2.17	
LR23663	4000K	COOL WHITE	1200	80	90°	20	BLACK	YES	\$ 2.17	
LR23664	5000K	BRIGHT WHITE	1200	80	90°	20	BLACK	YES	\$ 2.17	
LR23665	3000K	SOFT WHITE	1200	80	90°	20	NICKEL	YES	\$ 2.17	
LR23666	4000K	COOL WHITE	1200	80	90°	20	NICKEL	YES	\$ 2.17	
LR23667	5000K	BRIGHT WHITE	1200	80	90°	20	NICKEL	YES	\$ 2.17	

SPECIFICATIONS




ELECTRICAL

12"	WHITE	MODEL	DESCRIPTION	POWER	INPUT VOLTS	DIMMABLE	FREQUENCY	LUMEN EFFICACY	LIFETIME
		LR23670	LED22/SLIM12/30K/W/RD	22	120V	TRIAC	50/60Hz	82	50,000
		LR23671	LED22/SLIM12/40K/W/RD	22	120V	TRIAC	50/60Hz	82	50,000
		LR23672	LED22/SLIM12/50K/W/RD	22	120V	TRIAC	50/60Hz	82	50,000


PHOTOMETRIC

MODEL	COLOR (CCT)	TEMP	LUMEN	CRI	FLOOD
LR23670	3000K	SOFT WHITE	1800	80	120°
LR23671	4000K	COOL WHITE	1800	80	120°
LR23672	5000K	BRIGHT WHITE	1800	80	120°

GENERAL

MODEL	COLOR (CCT)	TEMP	LUMEN	CRI	FLOOD	FINISH	WET LOCATION	COST/YR	ENERGY STAR
LR23670	3000K	SOFT WHITE	1800	80	120°	WHITE	YES	\$ 1.81	
LR23671	4000K	COOL WHITE	1800	80	120°	WHITE	YES	\$ 1.81	
LR23672	5000K	BRIGHT WHITE	1800	80	120°	WHITE	YES	\$ 1.81	

DIMENSIONS

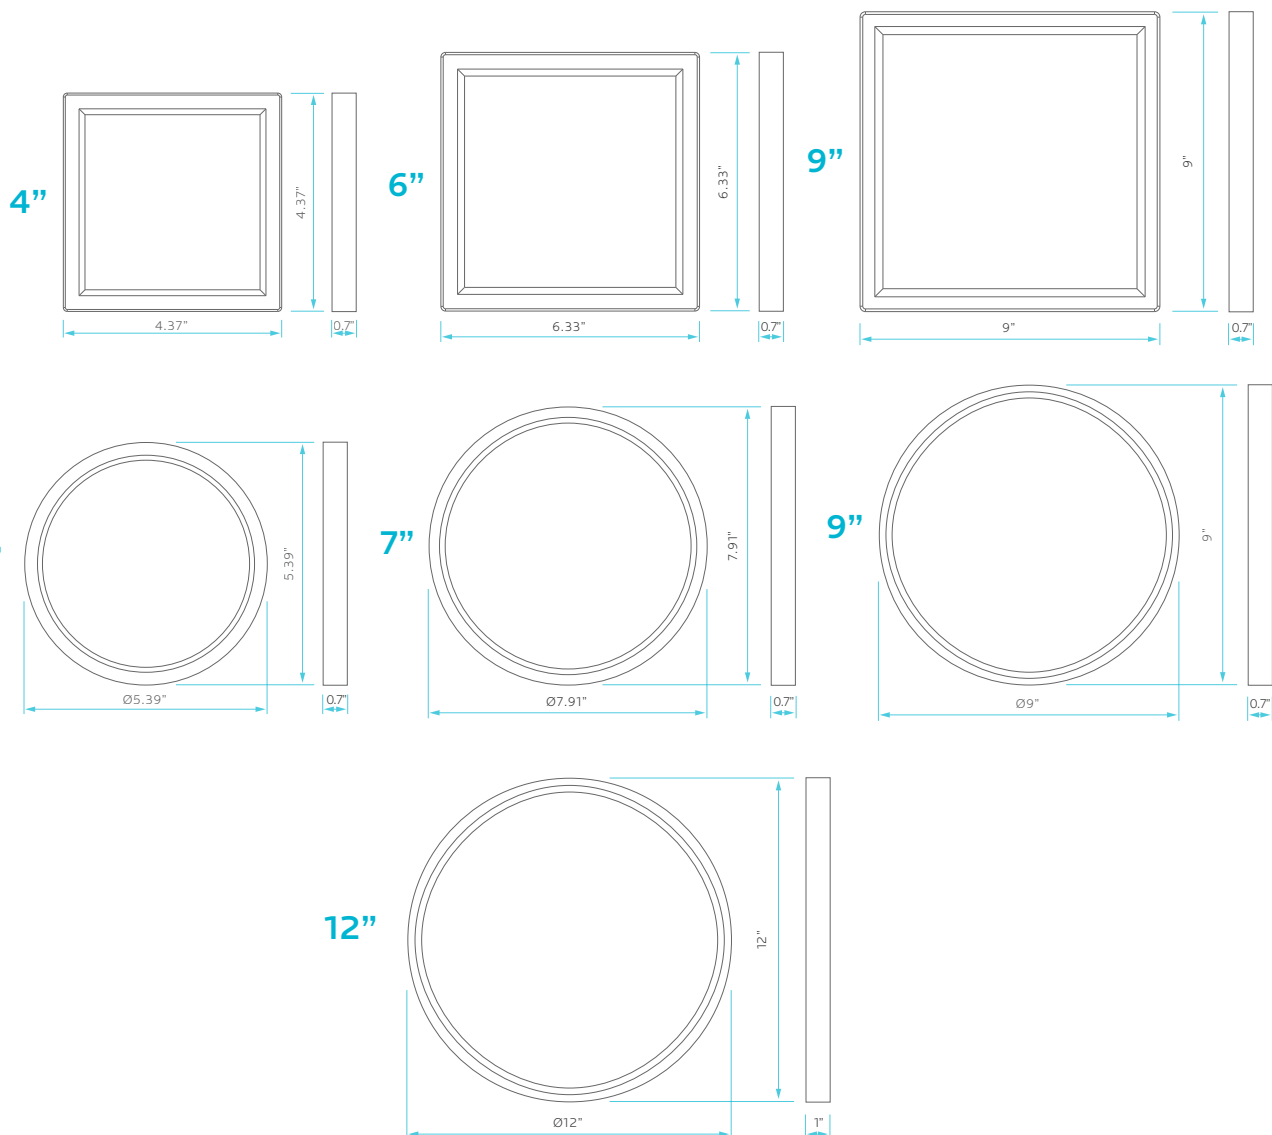

SURFACE MOUNT SLIM TRIM REPLACEMENT

**BLACK
FINISH**



**AVAILABLE IN
5", 7", 9"**

**BLACK
FINISH**



**AVAILABLE IN
4", 6", 9"**

**BRUSHED
NICKEL FINISH**



**BRUSHED
NICKEL FINISH**



SPECIFICATIONS

		MODEL	DESCRIPTION	SIZE	SHAPE	FINISH	CASE SIZE
SQUARE	4"	LR23677	LED10/SLIM4/SQ/TRIM/BK	4" SQUARE	TRIM REPLACEMENT	BLACK	20
		LR23679	LED10/SLIM4/SQ/TRIM/BN	4" SQUARE	TRIM REPLACEMENT	BRUSHED NICKEL	20
	6"	LR23683	LED15/SLIM6/SQ/TRIM/BK	6" SQUARE	TRIM REPLACEMENT	BLACK	20
		LR23685	LED15/SLIM6/SQ/TRIM/BN	6" SQUARE	TRIM REPLACEMENT	BRUSHED NICKEL	20
	9"	LR23689	LED18/SLIM9/SQ/TRIM/BK	9" SQUARE	TRIM REPLACEMENT	BLACK	20
		LR23691	LED18/SLIM9/SQ/TRIM/BN	9" SQUARE	TRIM REPLACEMENT	BRUSHED NICKEL	20
ROUND	5"	LR23674	LED10/SLIM5/RD/TRIM/BK	5" ROUND	TRIM REPLACEMENT	BLACK	20
		LR23676	LED10/SLIM5/RD/TRIM/BN	5" ROUND	TRIM REPLACEMENT	BRUSHED NICKEL	20
	7"	LR23680	LED15/SLIM7/RD/TRIM/BK	7" ROUND	TRIM REPLACEMENT	BLACK	20
		LR23682	LED15/SLIM7/RD/TRIM/BN	7" ROUND	TRIM REPLACEMENT	BRUSHED NICKEL	20
	9"	LR23686	LED18/SLIM9/RD/TRIM/BK	9" ROUND	TRIM REPLACEMENT	BLACK	20
		LR23688	LED18/SLIM9/RD/TRIM/BN	9" ROUND	TRIM REPLACEMENT	BRUSHED NICKEL	20

DIELINE

