

### CHAM-REM-3C

Variants	Item No.	Details
20142	CHAM-REM-3C	RGBW Remote

Thank you for purchasing your new CHAM-REM-3C Remote control, Please take the time to read and understand the instruction sheet below. Failure to do so may void warranty.


### Specifications

Type of controller:	RGBW Remote control	Remote size (mm):	(L) 136.3mm x (W) 38.9mm x (D) 10.7mm
Protocol:	RF + Bluetooth	Transmission frequency:	2.4GHz
Dimming range:	0.1% - 100%	Transmission range:	30m
Remote colour:	Black	Operation voltage:	3VDC (CR2025)

- RF+Bluetooth RGBW remote control
- Enables to control 4 zones of receivers
- Easy & quick pairing to the RF+Bluetooth receivers by simply pushing the buttons
- Mesh network for further control distance, receivers can transmit signal to each other
- Each remote can control numerous receivers
- Each receiver can be paired to max. 8 remote controls
- The controlled receiver status can be quickly synchronised to the smart APP
- Transmission range between every two neighbour devices up to 30m
- Bluetooth low power consumption technology, long battery life
- With magnet on the back, easy fasten to & remove from the bracket
- Waterproof grade: IP20

### Safety & Warnings

- This device contains lithium battery that shall be stored and disposed properly.
- DO NOT expose the device to moisture.

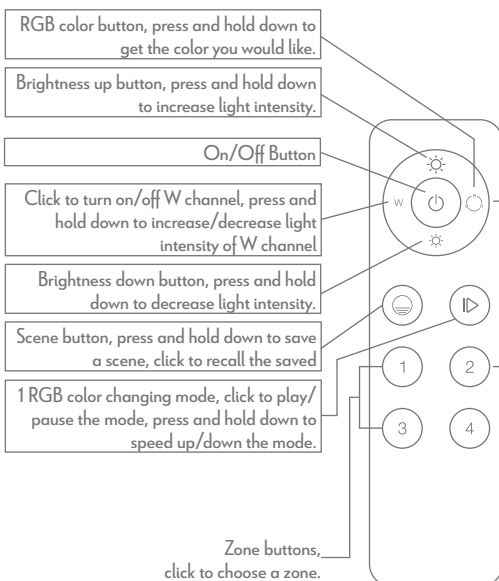

### Pair with RF+Bluetooth receiver

**Step 1:** Do wiring the receiver according to wiring diagram (please refer to the instruction of RF receiver that you would like to pair with).



**Step 2:** Click the "Prog. Key" or "Reset" button on RF+Bluetooth receiver (or reset power of the receiver 3 times continuously if the button is not accessible) to set it into pairing to RF remote status

**Step 4:** Then immediately click any other button except zone buttons, LED lights connected with the receiver flicker once means the receiver is paired with zone successfully.

**Step 3:** Click a zone button to select a zone (e.g. zone 2).

**Note: one receiver can be paired with max 8 remote controls.**

**If you use multiple receivers, you have two choices:**

Option 1: have all the receivers in the same zone, like zone 1

Option 2: have all the receivers in different zones, like zone 1, zone 2, zone 3 and zone 4

**Note:** -The lamp must be installed by professional electrician  
-Ensure the power supply is switched off before fitting this product

-Do not touch the lamp when in use  
-Keep away from hot steam and corrosive gas