

DX Series Touch Panel





DX1





1. Technical Specs:

| | | | |
|-------------------------|--------------------------------|----------------|-------------------|
| DX1 Dimming Touch Panel | | | |
| Input Voltage: | 100~240Vac | Dimensions: | L86×W86×H37(mm) |
| Output Signal: | RF 2.4GHz, DMX512 | Package Size: | L113×W112×H50(mm) |
| Working Temp.: | -30°C~55°C | Weight(G.W.): | 225g |
| R4-5A CV Receiver | | | |
| Input Voltage: | 5~24Vdc | Working Temp.: | -30°C~55°C |
| Current Load: | 5A × 4CH Max. 20A | Dimensions: | L175×W44×H30(mm) |
| Output Power: | Max.100W/240W/480W(5V/12V/24V) | Package Size: | L178×W48×H33(mm) |
| Wireless Signal: | 2.4GHz | Weight(G.W.): | 150g |
| R4-CC CC Receiver | | | |
| Input Voltage: | 12~48Vdc | Working Temp.: | -30°C~55°C |
| Output Voltage: | 3~46Vdc | Dimensions: | L175×W44×H30(mm) |
| Output Current: | CC 350/700/1050mA×4CH | Package Size: | L178×W48×H33(mm) |
| Output Power: | 1.05W~48.3W×4CH Max 193.2W | Weight(G.W.): | 165g |
| Wireless Signal: | 2.4GHz | | |


2. Product Size:



3. Installation Instruction:




4. Key Functions:

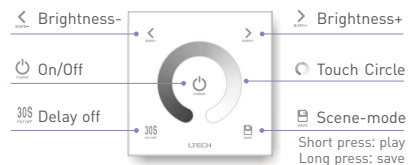


* Long press to turn on/off the tone.

5. Terminals:



6. Operating Instruction for Receiver:

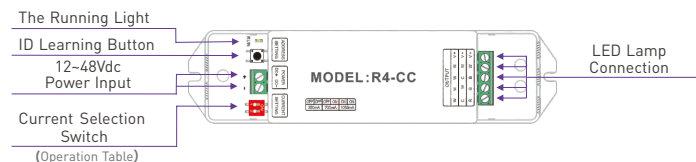

(Operation Table)


| | | | | | |
|-------|-------|--------|----|----|----|
| OFF | OFF | OFF | ON | ON | ON |
| 350mA | 700mA | 1050mA | | | |

7. The Learning ID Method :

Learning ID: Short press "ID learning button" on the R4-5A/R4-CC receiver, the running light keeps on. Then press any key or touch circle on the DX1 touch panel, the running light flicker several times, the buzzer long beep, activated.

Canceling ID: Long press "ID learning button" on the R4-5A/R4-CC receiver for 5s, the running light flicker several times, the buzzer long beep, canceled.

8. Wiring Diagram 1 (Wireless Control):

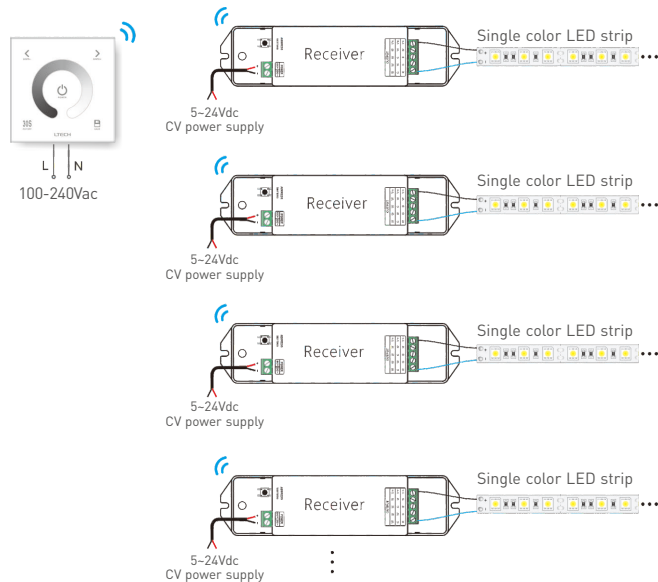

9. Wiring Diagram 2 (Connect to DMX Decoder):

