



Save More On Free Warranty Extended


Register your product for a **FREE** upgrade to a 24-Month Warranty:

www.tobenone.com/warranty

THANK YOU!


Thank you for your purchase of the Tobenone Triple-Display Docking Station UDS015DG. Our dock provides the ability to connect three monitors through two HDMI and one VGA interface, SD&Micro SD Card Reader, 3.5mm Audio & Microphone, USB-A 3.0, USB-C PD3.0, RJ45 Gigabit Ethernet to your USB C laptop via one USB C cable.

Ports and Connectors

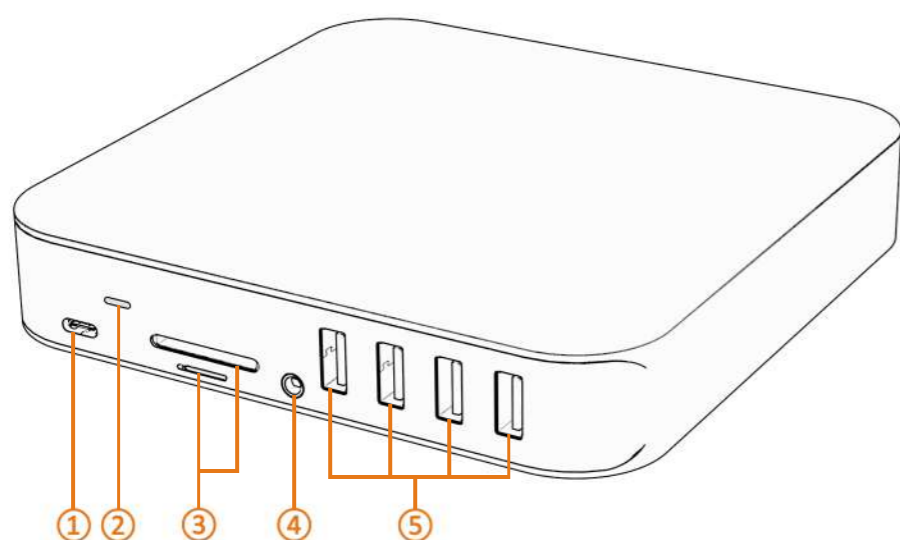

Front:

- ① USB-C: Connect to host
- ② LED indicator
- ③ SD&Micro SD Card Reader:
Read: 50-104MB/s, Write: 30-80MB/s,
(Data transfer rates are subject to the speed of the memory card itself and your computer's USB ports.)
- ④ 3.5mm Audio & Microphone
- ⑤ USB-A 3.0 (data+downstream charge): 5Gbps, 5V/0.9A@4.5W

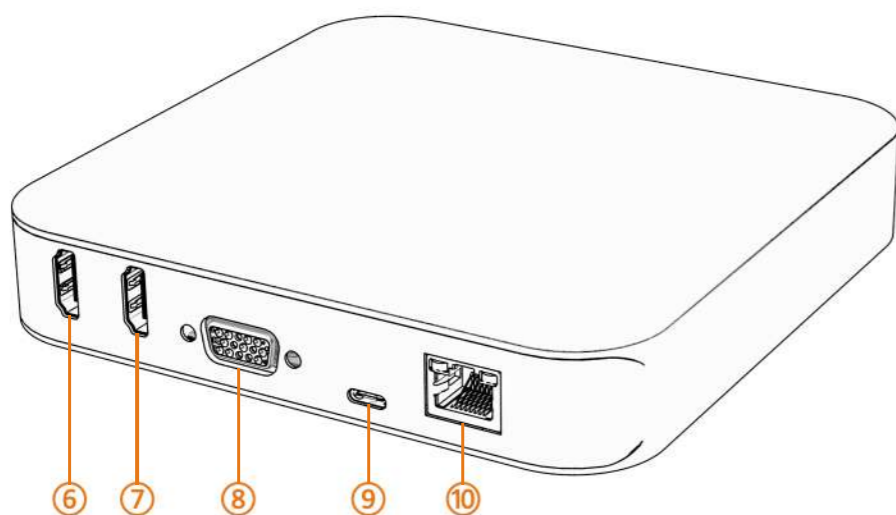

Back:

- ⑥ HDMI 1:
4K@60Hz (work separately while source is DP1.4)
4K@30Hz (work separately while source is DP1.2)
- ⑦ HDMI 2: 4K@30Hz
- ⑧ VGA: Up to 1080P@60Hz.
- ⑨ USB-C PD3.0: Connect the 65W power adapter, please note that it support max 100W input and max 87W output
- ⑩ RJ45 Gigabit Ethernet: 1000Mbps

USB-C Triple-Display Docking Station Quick Start Guide



HDMI1 + HDMI2+VGA

Step 1: Connect the power cord to the universal power adapter

Step 2: Connect the universal power adapter to PD port(Port⑨)

Step 3: Connect the dock and your laptop via USB C to USB C cable as provided

Step 4: Connect the monitors via HDMI1(Port⑥)/HDMI2(Port⑦)/VGA(Port⑧), cables are not included

Step 5: Install initiate InstantView to display:

1> Firstly, connect the docking station to the laptop via USB cable, and you will see a disk named "INSTANTVIEW"

2> Double click and open the file, according to your system choose the proper application and complete the driver installation within seconds

3> For macOS, the app will require a screen recording permission to capture pixels and send them to your external monitors: Apple Menu-> System Preference-> Security&Privacy->select "Privacy" tab->Scroll to find "Screen Recording" and check "macOS InstantView"

NOTE: The INSTANTVIEW app doesn't store or record any screen content.

4> Click InstantView APP, and it will enable external displays immediately.

Step 6: Attach USB3.0 devices to the front USB3.0 Port(Port⑤),insert SD card,TF/Micro SD card into SD/TF slot(Port③)

Step 7: Connect speaker/headphone or microphone to the front audio port(Port④). Connect the Ethernet cable to RJ45 Ethernet port(Port⑩)

Troubleshooting:

No Display output via HDMI1

1-Please ensure your laptop's USB-C port supports Power Delivery, DisplayPort, and Data transfer

2-Please check if the connection between the monitors,dock and laptop is tight

3-Please use standard HDMI cable,HDMI to HDMI is recommended

NO audio output from monitor

1-Please make sure your monitor supports audio output function

2-Set the external monitor as default audio output device