

### **MERICH**®

#### CONTURA IV 7232



## 32 26 20 0

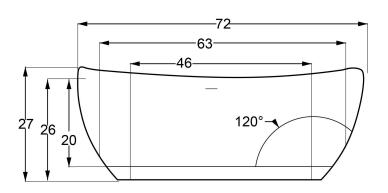



#### **DIMENSIONS**

72 x 32 x 27 deep (1829 x 813 x 686 mm) Gallon to Overflow = 77 (Liters = 291) Factory installed integral drain.

#### **MATERIAL**

Acrylic

#### **TUB FLOOR**

Non-Textured

#### **UNDERMOUNT: NO**

This tub is not designed for undermount installation.

#### **APPROVALS & COMPLIANCE**





Americh products meet or exceed the following standards:

- Underwriters Laboratories (UL)
- Underwriters Laboratories Canada (cUL)
- ANSI Z124.1 ANSI A112-19.7
- ANSI A112.19.8

Contact Americh for additional approvals.

#### AMERICH, CONTURA IV 7232

# Blower Blower Blower Blower Blower Blower Access Panel (Minimum 16"X 20") Access Panel (Minimum 16"X 20") Access Panel (Minimum 16"X 20") Access Panel MFG IDLabel

Airbath System II

Factory installed blower may only be placed in this location.

#### **STANDARD EQUIPMENT**

- Integral Waste & Overflow
- Lift Bag Included

#### **OPTIONAL ACCESSORIES**

- Chromatherapy
- Linear Waste & Overflow Upgrade
- Pillow: 12"
- Remote Control Upgrade

#### **INSTALLATION TIPS**

- Install according to Owner's Manual and local codes.
- Always consult your local plumber for recommendations as installations will vary.
- The bath must be secured to the floor by applying a bead of silicone around the base (which can be cut in future should there be a need to access to the plumbing).
- Installation must be carried out according to the manufacturer instructions.
- Hot water supply should be 65-75% of tub capacity or greater.

#### **ELECTRICAL REQUIREMENTS**

Americh recommends one 20 amp ground fault circuit interrupter (GFCI) for each power supply provided with the bathtub.

**LEGEND**