

Free Warranty Extended

Register your product for a **FREE** upgrade to a 24-Month Warranty:

<https://tobenone.com/warranty>

THANK YOU!

Thank you for purchasing Tobenone Universal dual 4K@60Hz Dock UDS030! Our dock provides the ability to connect up to two 4K@60Hz displays, RJ45 Gigabit Ethernet, audio input and output, 8 USB peripherals and SD/TF slot to your laptop via one hybrid USB cable.

Before connecting the dock, please download the driver by visiting: <https://www.synaptics.com/products/displaylink-graphics/downloads>
You also can scan the right QR code and send it to MacBook!



Step 1: Connect the 65W power supply to the dock's DC port (⑨)


Step 2: Use hybrid USB cable coming with the dock to connect the dock and laptop via HOST port (⑪)

Note: If the laptop's USB C port don't support charging or use the USB C to USB adapter, you need to run your laptop off of its own power supply!

Step 3: Connect the display 1 via HDM 1 or DP 1 port (⑥), connect the display 2 via HDMI 2 or DP 2 port (⑧)

Step 4: Please install the Displaylink App

Ports and connectors

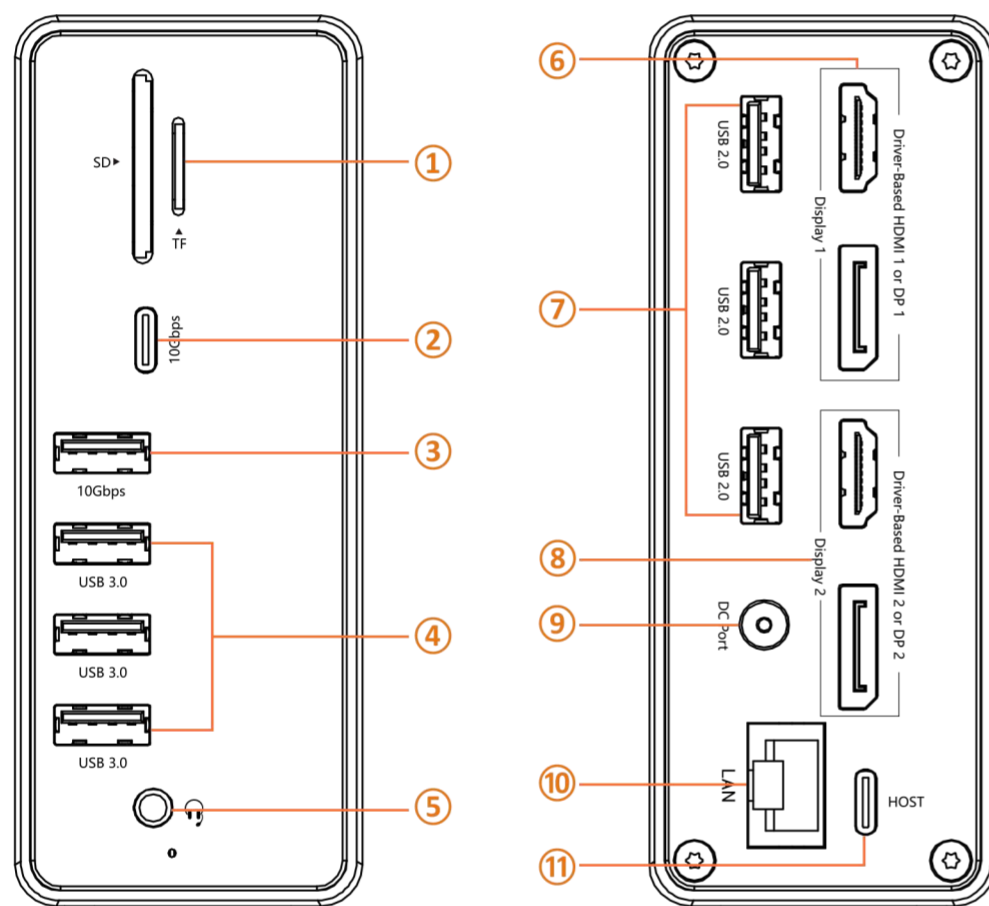

- ① SD/TF: Support reading and writing
- ② USB C 3.1: Speed up to 10Gbps
- ③ USB A 3.1: Speed up to 10Gbps
- ④ USB A 3.0: Speed up to 5Gbps
- ⑤ 3.5mm Audio/Microphone
- ⑥ Display 1: HDMI 1 or DP 1, resolution up to 4K@60Hz(driver-based)
- ⑦ USB A 2.0: Special for wireless devices
- ⑧ Display 2: HDMI 2 or DP 2, resolution up to 4K@60Hz(driver-based)
- ⑨ DC Port: Connect the 65W power supply
- ⑩ LAN Port: Speed up to 1000Mbps
- ⑪ HOST Port: Connect the laptop

Dual 4k Extended Monitors Configuration



Step 5: Attach USB and USB-C devices(USB driver, keyboard, mouse, printer, etc.) to the USB ports(②,③,④,⑦). It is recommended to connect wireless mouse and keyboard to connect the USB 2.0 port (⑦).

Step 6: Connect the speaker, headphones, or microphone to the audio port (⑤). And connect the ethernet cable to the RJ45 ethernet port (⑩)

USB-C DP Alt Mode (DP1.2/DP1.4)

HDMI 1	DP 1	HDMI 2	DP2	Remark
3840x2160/60Hz	3840x2160/60Hz			Single video output
		3840x2160/60Hz	3840x2160/60Hz	
3840x2160/60Hz		3840x2160/60Hz		Dual video output
3840x2160/60Hz	3840x2160/60Hz	3840x2160/60Hz	3840x2160/60Hz	
	3840x2160/60Hz	3840x2160/60Hz	3840x2160/60Hz	

Please note that you only can extend or mirror external dual monitors via:

HDMI 1 and HDMI 2 HDMI 1 and DP 2 DP 1 and HDMI 2 DP 1 and DP 2

**HDMI 1 and DP 1 cannot be used at the same time

**HDMI 2 and DP 2 cannot be used at the same time

Any questions, we are here to help!

Email: support@tobenone.com

The only question we can't fix is the one we don't know



Any questions, we are here to help!

Email: support@tobenone.com

Because the only question we can't fix is the one we don't know