

## Free Warranty Extended


Register your product for a **FREE** upgrade to a 24-Month Warranty:

<https://tobenone.com/warranty>

## THANK YOU!

Thank you for purchasing TOBENONE Upgraded DisplayLink Docking Station UDS033! Our dock provides the ability to connect up to Triple 4K@60Hz Displays, 6 USB peripherals, SD/TF 3.0, RJ45 Gigabit Ethernet, and 3.5mm stereo combo jack to your USB C laptop via one USB C cable.

## Ports and Connectors

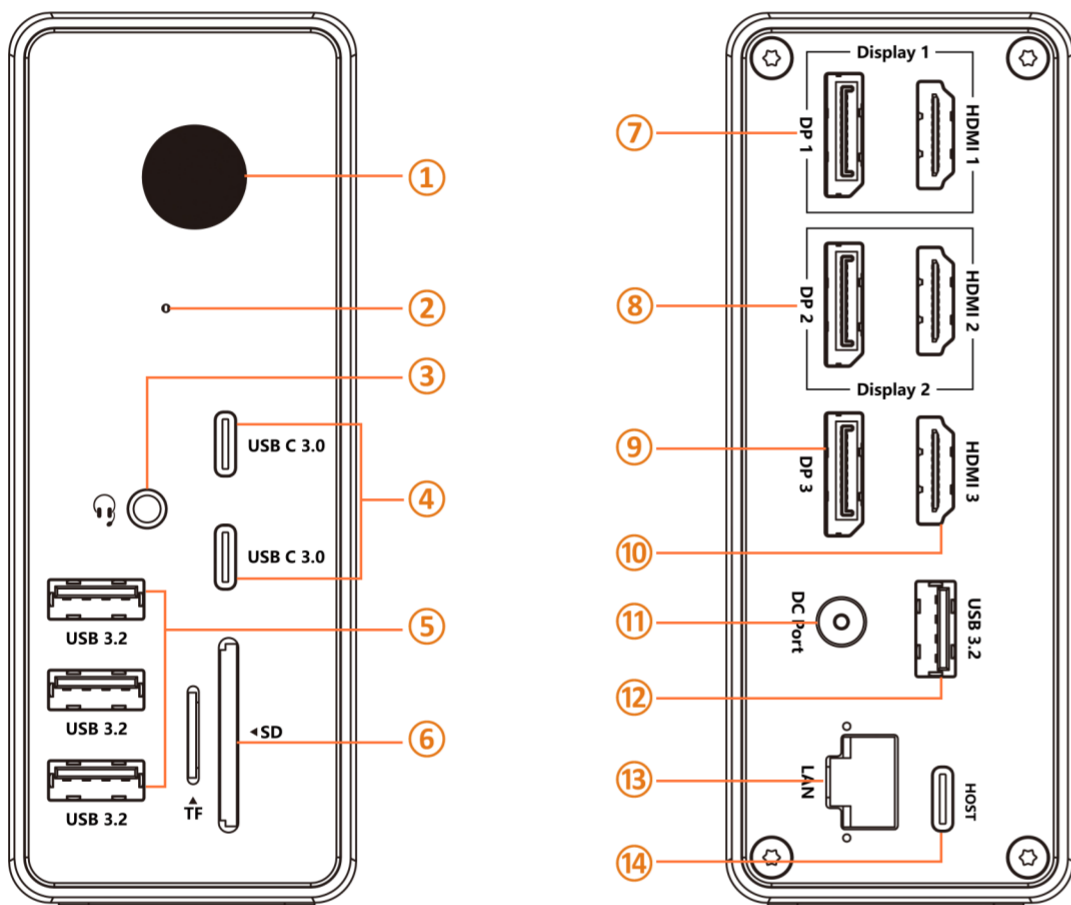

- ① Power Button: Control dock power on/off
- ② Green Power LED
- ③ 3.5mm Audio: Support mic&audio-out
- ④ USB C 3.0\*2: Support data transfer and PD 18W output
- ⑤ USB A 3.2 \*3: Speed up to 10Gbps
- ⑥ SD/microSD 3.0 Slot: Support SD&TF work simultaneously
- ⑦ Display 1: HDMI 1 or DP 1, resolution up to 4K@60Hz (driver-based)
- ⑧ Display 2: HDMI 2 or DP 2, resolution up to 4K@60Hz (driver-based)
- ⑨ Display 3: DP 3, resolution up to 8K@30Hz (Plug-and-Play)
- ⑩ Display 4: HDMI 3, resolution up to 8K@30Hz (Plug-and-Play)
- ⑪ DC Port: Connect the included power adapter, support 100W output
- ⑫ USB A 3.2: Speed up to 10Gbps
- ⑬ LAN Port: Speed up to 1000Mbps
- ⑭ HOST Port: Connect to the laptop



Any questions, we are here to help!

Email: [support@tobenone.com](mailto:support@tobenone.com)

The only question we can't fix is the one we don't know

# Triple 4K Monitors Docking Station Quick Start Guide

**Before connect the dock, please install the driver by visiting:**  
<https://www.synaptics.com/products/displaylink-graphics>  
**You also can scan the right QR code and send it to laptop.**



**Step 1:** Please install the DisplayLink Driver

△: For macOS, after installing the DisplayLink driver, need to open Security&Privacy--Screen Recording--Allow DisplayLink manager to join. This dock uses screen recording to display the screen. Since the screen is recording, cannot watch any HDCP content(Neflix/Prime/ iTunes/Hulu...). Must update your DisplayLink driver after you update the macOS system.

**Step 2:** Connect the 120W power adapter to the dock's DC port (⑪)

**Step 3:** Use the USB C cable coming with the dock to connect the dock and laptop via HOST port (⑭)

**Step 4:** Connect display 1 via HDM 1 or DP 1 port (⑦), connect display 2 via HDMI 2 or DP 2 port(⑧), connect display 3/4 via HDMI 3 and DP 3 port(⑨, ⑩)

## Triple 4K@60Hz Displays Configuration



**Step 5:** Attach USB-C devices to the USB-C ports(④). And attach USB devices(USB driver, keyboard, mouse, printer, etc.) to the USB ports(⑤, ⑫).

**Step 6:** Connect the speaker, headphones, or microphone to the audio port(③). And connect the ethernet cable to the ethernet port(⑬)

**Step 7:** Turn on the power button(①)

## USB-C DP Alt Mode (DP1.4)

Item	Display 1		Display 2		Display 3	Display 4	Remark
	HDMI 1	DP 1	HDMI 2	DP2	HDMI 3	DP3	
1	3840x2160/60Hz						Single video output
2		3840x2160/60Hz					
3			3840x2160/60Hz				
4				3840x2160/60Hz			
5					8K/30Hz		
6						8K/30Hz	
7	3840x2160/60Hz		3840x2160/60Hz		3840x2160/60Hz	3840x2160/60Hz	Multiple video output for Windows
8	3840x2160/60Hz			3840x2160/60Hz	3840x2160/60Hz	3840x2160/60Hz	
9		3840x2160/60Hz	3840x2160/60Hz		3840x2160/60Hz	3840x2160/60Hz	
10		3840x2160/60Hz		3840x2160/60Hz	3840x2160/60Hz	3840x2160/60Hz	
11	3840x2160/60Hz		3840x2160/60Hz		3840x2160/60Hz		Multiple video output for MacBook
12	3840x2160/60Hz		3840x2160/60Hz			3840x2160/60Hz	
13	3840x2160/60Hz			3840x2160/60Hz	3840x2160/60Hz		
14	3840x2160/60Hz			3840x2160/60Hz		3840x2160/60Hz	
15		3840x2160/60Hz	3840x2160/60Hz		3840x2160/60Hz		
16		3840x2160/60Hz	3840x2160/60Hz			3840x2160/60Hz	
17		3840x2160/60Hz		3840x2160/60Hz	3840x2160/60Hz		
18		3840x2160/60Hz		3840x2160/60Hz		3840x2160/60Hz	

**Please note that:**

▲1: HDMI 1 and DP 1 cannot be used at the same time

▲2: HDMI 2 and DP 2 cannot be used at the same time

▲3: Full-function Windows laptop can extend up to 4 displays, must confirm laptop's USB C port support display. If laptop's USB C port don't support display, DP 3 and HDMI 3 cannot work

▲4: MacBook only can extend up to 3 displays, DP 3 and HDMI 3 cannot work simultaneously