


SEISMIC FSCUGV 4 AND 6 MOVEMENT ul test



DESIGN

- A) Tube 321 Stainless Steel
- B) Braid 304 Stainless Steel
- C) Ends: C.S. Grooved End
- Misc.: C.S 90
- Temp: 750 Degrees F

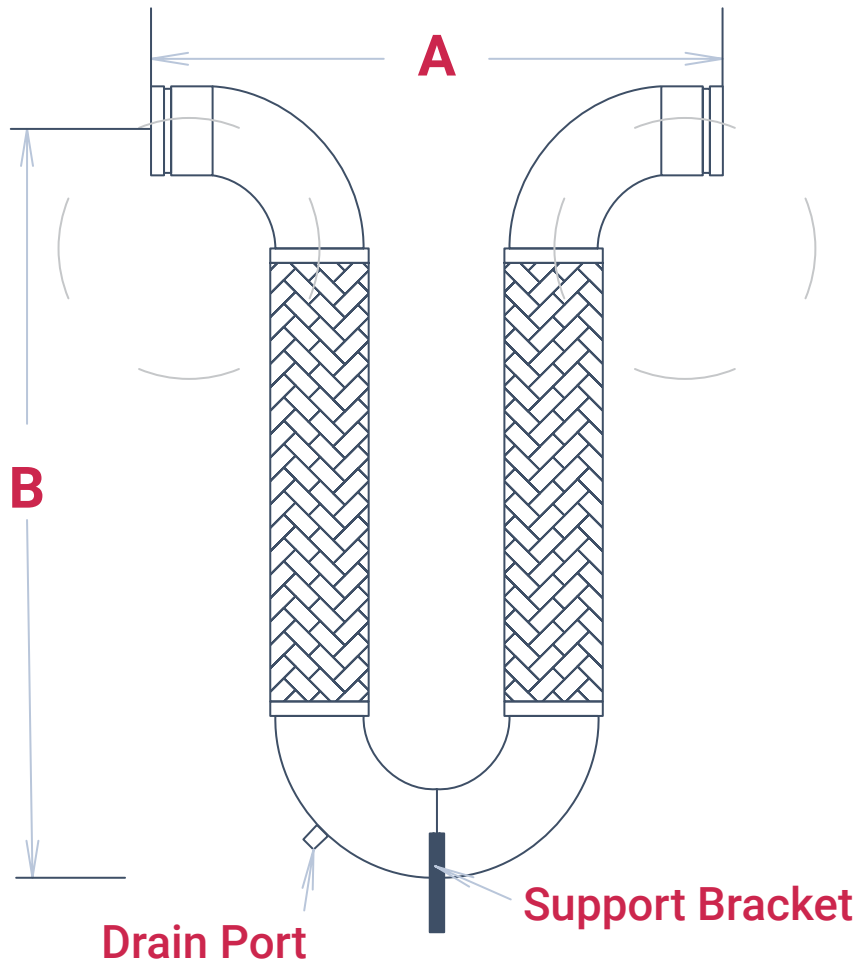

Part Number	Nom. Hose size	Pressure @ 70 F	-4.0MVT (4.0 Inch Movement)			-6.0MVT (6.0 Inch Movement)		
			OAL	HEIGHT	LL (Live Length)	OAL	HEIGHT	LL (Live Length)
FSCU200CSGV-	2.00	300	20.56	28.71	20.00	22.56	33.65	24.00
FSCU250CSGV-	2.50	300	22.93	31.01	20.05	25.00	35.91	25.17
FSCU300CSGV-	3.00	300	25.61	35.75	23.50	26.38	38.79	26.50
FSCU400CSGV-	4.00	175	31.88	41.24	25.50	31.88	45.82	30.00
FSCU500CSGV-	5.00	175	37.88	48.81	28.50	37.88	52.27	32.00
FSCU600CSGV-	6.00	175	43.88	54.30	30.50	43.88	59.80	36.00
FSCU800CSGV-	8.00	175	55.87	64.78	34.00	55.87	70.89	40.00