

DULUX® T/E/IN/XL ECOLOGIC®

4-Pin Amalgam EXtended Life Compact Fluorescent Lamps



SYLVANIA DULUX T/E/IN/XL ECOLOGIC compact fluorescent lamps are ideal for use in a wide range of commercial and residential applications. Replace standard life lamps with DULUX T/E/IN/XL eXtended Life lamps and improve life up to 67% extending relamp cycles versus the existing lamps. They are designed to be operated on energy efficient electronic and dimming ballasts.

SYLVANIA DULUX T/E/IN/XL lamps are long-life, energy-saving alternatives for incandescent lamps. Amalgam technology provides higher lumens over a much wider temperature range than non-amalgam lamps. The triple tube configuration of these lamps allows for single-lamp luminaire designs with improved efficacy and photometric performance.

Key Features & Benefits

- EXtended Long average rated life of 26,000 hours at 3 hours per start and 30,000 hours at 12 hours per start
- Improved lumen output vs. non-amalgam triple tube lamps
 - Maintains 90% lumens from 40° to 140°F ambient
- Fast run-up to full brightness
- ECOLOGIC passes Federal TCLP Test*
- RoHS compliant
- Operates on electronic ballasts systems
 - Flicker-free starting and dimmable
 - Compatible with QUICKTRONIC® PROStart® CF
- High luminous efficacy
- Rare earth tri-phosphor with 82 CRI
- Less power consumption than incandescent of comparable light output



ECOLOGIC® is a comprehensive program of OSRAM SYLVANIA focused on addressing environmental issues at all stages of lamp life.

* Regulations may vary. Check your local and state regulations.

Product Offering

Description	Wattage	CCT
CF26DT/E/IN/XL	26	2700K, 3000K, 3500K, 4100K
CF32DT/E/IN/XL	32	2700K, 3000K, 3500K, 4100K
CF42DT/E/IN/XL	42	2700K, 3000K, 3500K, 4100K

Application Information

Applications

- Recessed downlights
- Surface mounted luminaires
- Wall sconces

Application Notes

1. 4-pin lamps are designed for use with programmed rapid start ballasts. Not recommended for use with IS ballasts.
2. Minimum starting temperature depends on ballast.
3. Rule of thumb: to estimate the appropriate compact fluorescent lamp wattage, divide the incandescent wattage by 4.
4. Equipment manufacturers are advised to consult ANSI and IEC standards for the maximum allowable dimensions and temperature to insure compatibility with similar products.
5. QUICKTRONIC PROStart CF electronic ballasts are UCSA Certified and FCC 47CFR Part 18 Consumer Rated.
6. For horizontal operation, install lamp with etch facing down.
7. QUICKTRONIC ballasts feature QUICKSENSE® circuitry for end-of-life protection required by NEMA.



Specification Data

Catalog #	Type
Project/Job	
SYLVANIA Lamp	
SYLVANIA Ballast	
Prepared by	

Ordering Information

Item Number	Ordering Abbreviation	NEMA Generic Designation	Base	Watts	Volts ¹	Amps ¹	Initial Lumens	Mean Lumens ²	Color Temp.	CRI	Avg. Rated Life (hrs.) ³
21387	CF26DT/E/IN/827/XL/ECO	CFTR26W/GX24q/27	GX24q-3	26	80	.300	1,800	1550	2700K	82	26,000
21388	CF26DT/E/IN/830/XL/ECO	CFTR26W/GX24q/30	GX24q-3	26	80	.300	1,800	1550	3000K	82	26,000
21389	CF26DT/E/IN/835/XL/ECO	CFTR26W/GX24q/35	GX24q-3	26	80	.300	1,800	1550	3500K	82	26,000
21390	CF26DT/E/IN/841/XL/ECO	CFTR26W/GX24q/41	GX24q-3	26	80	.300	1,800	1550	4100K	82	26,000
21391	CF32DT/E/IN/827/XL/ECO	CFTR32W/GX24q/27	GX24q-3	32	100	.320	2,400	2065	2700K	82	26,000
21392	CF32DT/E/IN/830/XL/ECO	CFTR32W/GX24q/30	GX24q-3	32	100	.320	2,400	2065	3000K	82	26,000
21393	CF32DT/E/IN/835/XL/ECO	CFTR32W/GX24q/35	GX24q-3	32	100	.320	2,400	2065	3500K	82	26,000
21394	CF32DT/E/IN/841/XL/ECO	CFTR32W/GX24q/41	GX24q-3	32	100	.320	2,400	2065	4100K	82	26,000
21395	CF42DT/E/IN/827/XL/ECO	CFTR42W/GX24q/27	GX42q-3	42	135	.320	3,200	2750	2700K	82	26,000
21396	CF42DT/E/IN/830/XL/ECO	CFTR42W/GX24q/30	GX24q-4	42	135	.320	3,200	2750	3000K	82	26,000
21397	CF42DT/E/IN/835/XL/ECO	CFTR42W/GX24q/35	GX24q-4	42	135	.320	3,200	2750	3500K	82	26,000
21398	CF42DT/E/IN/841/XL/ECO	CFTR42W/GX24q/41	GX24q-4	42	135	.320	3,200	2750	4100K	82	26,000

Notes:

1. Measured on high-frequency ballast

2. Measured at 40% of rated life.

3. Based on 3 hours per start. Life at 12 hours per start is 30,000 hours. Number of operating hours when half have failed and half are still functional.

Ordering Guide

CF	26	DT	/	E	/	IN	/	835	/	XL	/	ECO
Compact Fluorescent	Wattage 26, 32, 42	DULUX® Triple	/	Electronic Ballast	/	Amalgam	/	8=82 CRI 27=2700K CCT 30=3000K CCT 35=3500K CCT 41=4100K CCT	/	EXtended Life	/	ECOLOGIC®

System Comparison


Compact Fluorescent vs. Incandescent

Lamp Type	Rated Lamp Life (hrs.)	System Lumens	System Wattage	System LPW	Energy Savings*
100W Incandescent	750	1,710	100	17	—
DULUX T/E/IN/XL 26W w/QUICKTRONIC® CF	26,000	1,800	28	64	\$115
150W Incandescent	750	2,740	150	18.5	—
DULUX T/E/IN/XL 42W w/QUICKTRONIC CF	26,000	3,200	46	70	\$66


* Based on an energy cost of \$0.10/kWh over the life of the lamp.

Lamp Dimensions

	(A) MOL [in. (mm)]	(B) Max. Base Face to Top of Lamp [in. (mm)]	(C) Max. Base Width [in. (mm)]	(D) Guide Post Length [in. (mm)]
CF26DT/E/IN	5.02 (127.5)	4.40 (111.5)	1.93 (49)	0.62 (16)
CF32DT/E/IN	5.67 (144)	5.04 (128)	1.93 (49)	0.62 (16)
CF42DT/E/IN	6.50 (165)	5.87 (149)	1.93 (49)	0.62 (16)

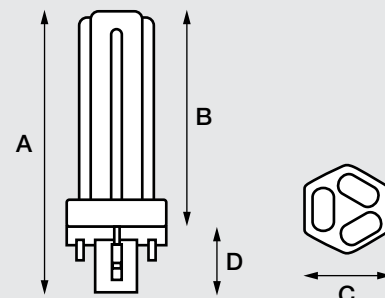

Technical Information

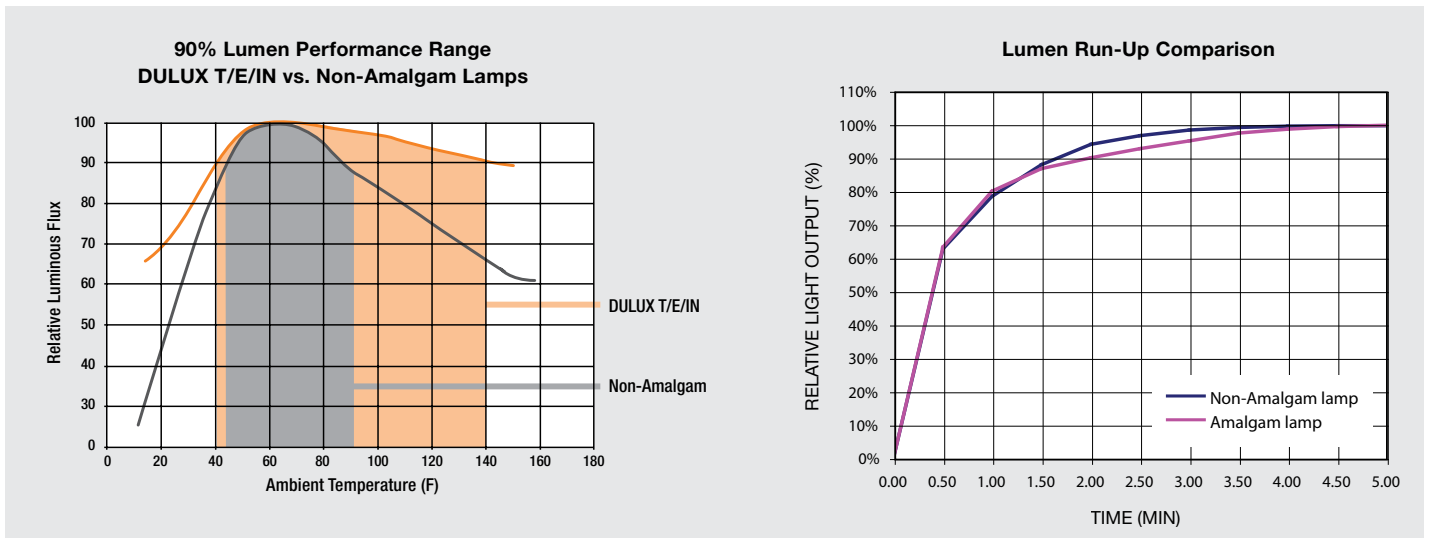

Sample Specification

Lamp(s) shall be (a) DULUX® EXtended Life (CF18DT/E/IN/XL, CF26DT/E/IN/XL, CF32DT/E/IN/XL or CF42DT/E/IN/XL) ECOLOGIC® lamps and pass existing Federal TCLP limits. Lamp(s) shall have an average rated life of 26,000 hours, a correlated color temperature of (2700K, 3000K, 3500K or 4100K), and a CRI of 82. Lamps shall have a (GX24 -3 or -4) plug-in, 4-pin base and be suitable for use on electronic and dimming ballasts. Lamps shall be operated by QUICKTRONIC® ballasts. Both lamps and ballasts are covered by the QUICK 60+® system warranty.

Related Literature

For optimum system performance and warranty pair with QUICKTRONIC® CF ballast.

Ballast Technology Applications & Specification Guide (Literature Code: ECS-SPECGUIDE2013)

QUICK 60+® System Warranty (Literature Code: ECS140)