



Plant Light N°1 User Guide

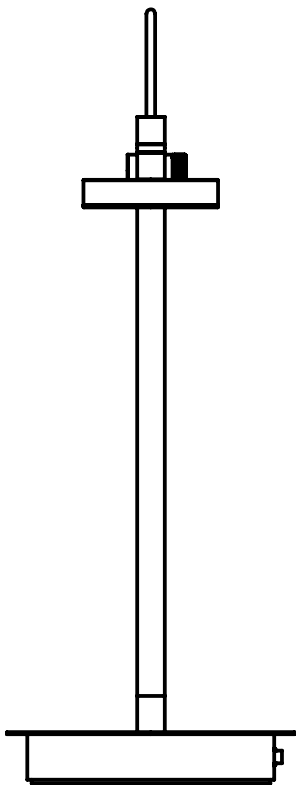

ample®

Controls / Connectors

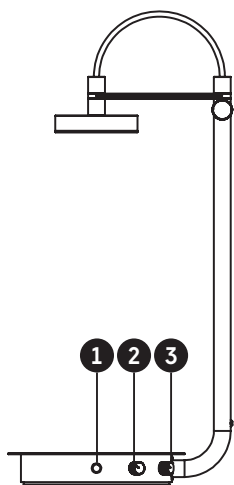


1 Time Start / Reset

Press this button when you want your PL1 to start. This will trigger the daytime cycle, set by the time control knob, to start. Everyday your PL1 will wake at this time with a sunrise cycle of 2 minutes. You can reset this at any time by pressing.

2 Time Select

Use this knob to select the day length of your PL1. Available times are 0 (off), 10, 12, 16 and 24 hours.

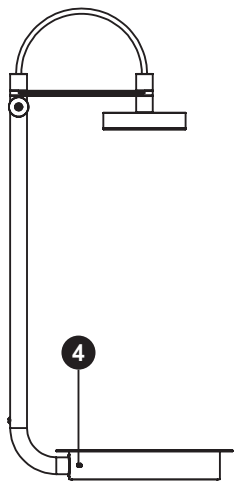


3 Brightness Select

Use this knob to select the intensity of your PL1. Available levels are 10, 25, 50, 75 and 100 percent. This correlates to PPF values of 40, 100, 200, 300 and 400 $\mu\text{mol}/\text{m}^2/\text{s}$.

4 USB-C Port


Use the included cable to connect to the 15V= 2A power source.

Assembly




- 1 Insert upright into base.

- 2 Secure upright to base with supplied bolt.




- 3 Insert the power source into a wall socket and use the supplied cable to connect with the PL1 USC-C port.




Set Up


- 1** Select your location. Place your light on flat surface anywhere in your home. It's not water-resistant so don't put it near water or leave it in the rain.

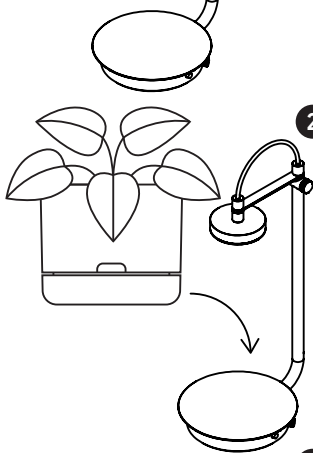


- 2** Set up your plant and planter. The base accommodates any planter size up to 25cm in diameter. Set the appropriate time and brightness according to your plant and press start.



- 3** Adjust the height. Rotate the side knob anti-clockwise to unlock.



- 4** Pull the light source upwards. The light source should always be kept 15cm from the top of your plant canopy.



- 5** Rotate the side knob clockwise to lock in place.

Light Settings

Light Group	Brightness	PPFD
Low Light	10	40
Medium Light	25	100
Bright Indirect Light	50	200
High Light	75	300
Very High Light	100	400

Plant Group	Time
Off	0
Short Day	10
Day Neutral	12
Long Day	16
Custom*	24

*For use with smart controller

Light Group

Plant

Low Light

Aglaonema, Aspidistra, Arrowhead Vine, Dracaena, Hoya, Ferns, Fittonia, Maranta, Peace Lily, Peperomia, Philodendron Vines, Pothos, Sansevieria, Schefflera, ZZ Plant

Medium Light

African Violets, Air Plants, Alocasia, Anthurium, Areca Palm, Begonia, Calathea, Cordyline, Dieffenbachia, English Ivy, Jade Plant, Monstera deliciosa, Parlour Palm, Phalaenopsis, Philodendrons, Pilea, Spider Plant

Bright Indirect Light

Croton , Ficus, Schlumbergera, Rhipsalidopsis

High Light

Succelents

Very High Light

Microgreens, Leafy Greens, Herbs

Details

Dimensions (H x W x D)	520mm 20.5" x 210mm 8.25" x 250mm 9.8" D
Weight	2.5kg
Height Adjustable	300mm 11.8"
Input	15V= 2A
LED	Full Spectrum 90+ CRI
Package Contents	PL1 upright, PL1 base, USB-C cable (2m), power source, user guide, hex key, M4 bolt

CAUTION: Do not ingest battery - Chemical burn hazard.

The controller supplied with this product contains a coin/button cell battery. If the coin/button cell battery is swallowed, it can cause severe internal burns in just 2 hours and lead to death.

Keep new and used batteries away from children.

If the battery compartment does not close securely, stop using the product and keep it away from children.

If you think the batteries might have been swallowed or placed inside any part of the body, seek immediate medical attention.

This product is designed for indoor use only.

