




GE  
Lighting

## 12273 - EL23/R25/WW

### GE energy smart® CFL 23 watt R25 floodlight 1-pack

- \$110 in energy savings over the life of the bulb based on 3 hours per day usage
- Lasts 13.7 years based on 3 hours per day usage
- 90 watt replacement uses only 23 watts
- Estimated yearly energy costs \$2.77 based on 3 hours per day \$0.11 per kWh
- R25 indoor floodlight with medium base for use in directional fixtures such as recessed can lighting
- The GE energy smart® indoor floodlight CFLs feature a GE Spiral® bulb on the inside that uses 75% less energy and lasts up to 5 times longer than incandescent indoor reflectors. These bulbs' funnel shape help direct light where it is needed better than a standard CFL or incandescent bulb. Use GE energy smart® indoor floodlight CFLs in indoor recessed track and recessed fixtures to create broad beams of light in any room or space

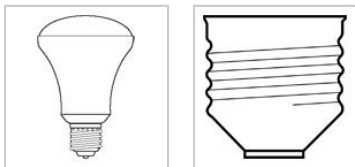

### CAUTIONS & WARNINGS

#### Caution

- Lamp may shatter and cause injury if broken
  - Remove and install by grasping only plastic portion of the lamp.

#### Warning

- Risk of Electric Shock
  - Do not open - no user serviceable parts inside.
  - Do not use where directly exposed to water.

### NOTES

- Best performance if operated base up and at 77 degrees F (25C) ambient temperature.
- Fluorescent lamp lumens decline during life
- Lumens on one piece self ballasted lamp systems are measured base up.
- Use only on 120V 60 Hz circuits. Do not use on dimming circuits, photocells or timers. Do not use in wet locations.

### GENERAL CHARACTERISTICS

Lamp Type	Compact Fluorescent - Self-Ballasted
Bulb	R25
Base	Medium Screw (E26)
Equivalent Wattage	75.0 W
Rated Life	15000.0 hrs
Starting Temperature (MIN)	0.0 °C
Total Harmonic Distortion (THD)	130.0 %
LEED-EB MR Credit	227 picograms Hg per mean lumen hour
Primary Application	Indoor Floodlight;Facilities;Retail Display;Hospitality;Office;Restaurant

### PHOTOMETRIC CHARACTERISTICS

Initial Lumens	1100.0
Mean Lumens	880.0
Nominal Initial Lumens per Watt	47
Color Temperature	3000.0 K
Color Rendering Index (CRI)	82.0

### ELECTRICAL CHARACTERISTICS

Wattage	23.0
Voltage	120.0
Input Voltage	120.0 V
Input Current	0.3700 A
Power Factor	0.6

### DIMENSIONS

Maximum Overall Length (MOL)	4.9000 in(124.5 mm)
Nominal Length	4.900 in(124.5 mm)
Bulb Diameter (DIA)	3.125 in(79.4 mm)

### PRODUCT INFORMATION

Product Code	12273
Description	EL23/R25/WW
Standard Package	Case
Standard Package GTIN	10043168122730
Standard Package Quantity	6
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	6
UPC	043168122733