

Hi-Brite

7015TXO 750W GX9.5 100V 1CT



The compact, shock-resistant design of the Hi-Brite lamp series makes it easy to handle and ideal for moving head systems. Also, the compact filament ensures a high beam intensity, which can be used to reduce energy consumption: for example, 1200W can now be used instead of 2500W. In addition, the highly innovative P3 technology, developed by Philips, allows the lamp to be used at higher temperatures in any burning position, which further extends lamp lifetime, reduces lamp replacement costs and ensures consistency of high-quality light output.

Product data

• General Characteristics

Philips Code	7015TXO
ANSI Code	-
System Description	P3 Technology
Cap-Base	GX9.5
Bulb Finish	Clear
Filament Shape	Bi-Plane
Operating Position	any
Main Application	Entertainment
Life to 50% failures	300 hr

• Light Technical Characteristics

Color Temperature	3200 K
Technical	
Luminous Flux Lamp	20250 Lm

• Electrical Characteristics

Watts	750 W
Voltage	100 V
Dimmable	Yes

• Luminaire Design Requirements

Pinch Temperature	500 (max) C
-------------------	-------------

• Product Dimensions

Overall Length C	104 (max) mm
Diameter D	19 (max) mm
Light Center Length	55 mm
L	
Filament Dimensions (WxH) [mm]	-
Filament Height H	8.5 mm
Filament Length W	9.5 mm

• Product Data


Product number	151795
Full product name	7015TXO 750W GX9.5 100V 1CT
Short product name	7015TXO 750W GX9.5 100V 1CT/10
Pieces per Sku	1
eop_pck_cfg	10
Skus/Case	10
Bar code on pack	8711500505576
Bar code on case	8711500505583
Logistics code(s)	924574530928
eop_net_weight_pp	0.037 kg

Dimensional drawing

PHILIPS


sense and simplicity

Dimensional drawing

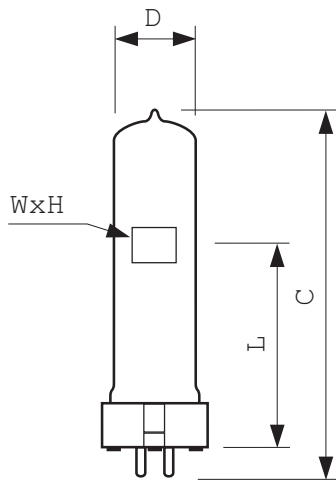

7015TXO 750W GX9.5 100V 1CT

Product	C (Max)	D (Max)	H (Norm)	L (Norm)	W (Norm)
7015TXO 750W GX9.5 100V	104	19	8.5	55	9.5



© 2012 Koninklijke Philips Electronics N.V.
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips Electronics N.V. or their respective owners.

www.philips.com/lighting

2012, December 28
data subject to change