

Mounting instructions for Wolfman  
DR650 Top rack  
Part # RTR4

This kit contains the following:

Quantity	Description
1	Top rack
2	8mm x 1.25 x 20mm Socket head bolt
2	8mm x 1.25 x 35mm Socket head bolt
2	3/4 x 7/8 Aluminum spacer
4	8mm Washer (small)

**Tools required:**

BLUE Loctite or a medium strength thread locker

6mm Hex wrench

Read and understand these instructions prior to installation!

**Be sure to thread lock all bolts**

**Correctly Mounted Wolfman top rack on a DR650**

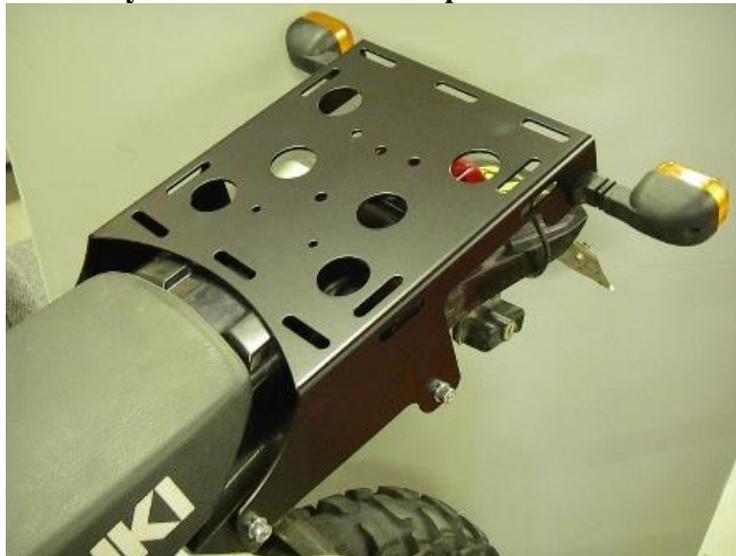


FIG 1

Remove the OEM grab handles and turn signals, and set aside. (Turn signals connect/disconnect underneath the seat, and route underneath along side of the rear fender plastic.)

## Wolfman Top Rack

1. Place top rack into position on motorcycle. FIG 1
2. Install two 8mm washer onto both 8mm x 1.25 x 20mm socket head bolts with thread lock, and run each of them through the front top rack mount holes, into the threaded sub-frame mount holes (same holes as used on the grab handles) (don't tighten). FIG 2

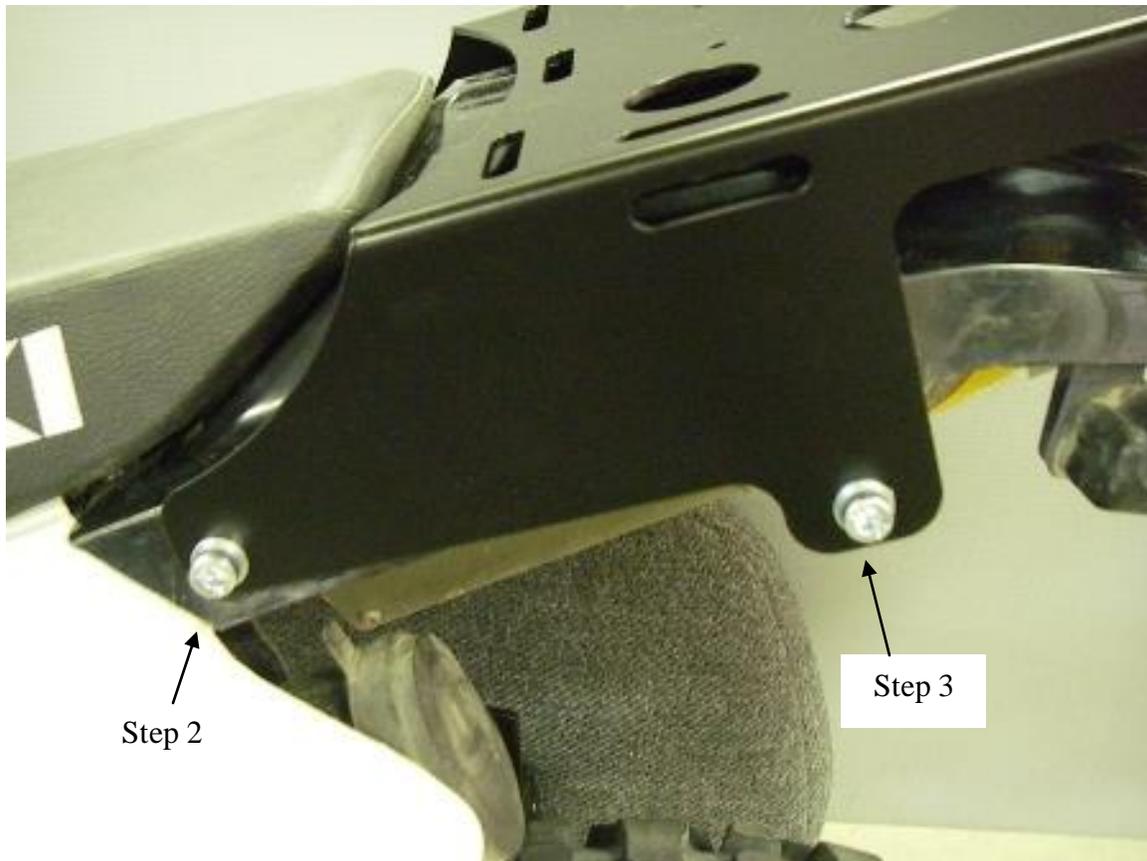


FIG 2

3. Install two 8mm washer onto both 8mm x 1.25 x 35mm socket head bolts with thread lock, and run each of them through the rear top rack mount holes. Then through one 3/4 x7/8 aluminum spacer and into the threaded sub-frame mount hole (same holes as used on the grab handles). FIG 2 and 3



FIG 3

Re-install the turn signals onto the Wolfman top rack. (See FIG 1 for location.) The turn signals mount into the rectangular-shaped holes to the rear of the rack on each side.

**Now that the top rack is on the DR650, the Bolt Tightening sequence:** Rear rack mounts. Front rack mounts.

**\*\*Periodically check all hardware to maintain rigidity and structural integrity\*\***

If you have any questions call 800/535-8131 or email [sales@wolfmanluggage.com](mailto:sales@wolfmanluggage.com)  
Enjoy!