

# SKU# 5005526



SCAN THE QR CODE TO VIEW THE INSTALL VIDEO

## **PACKAGE CONTENTS:**





2X TAIL LIGHT ASSEMBLIES

## FITMENT:

2005-2006 JEEP GRAND CHEROKEE

- FACEBOOK.COM/SPYDERAUTO
- LINKEDIN.COM/COMPANY/SPYDER-AUTO
- **INSTAGRAM.COM/SPYDERAUTO**
- TWITTER.COM/SPYDERAUTO
- TIKTOK.COM/@SPYDERAUTO




## SCAN THE QR CODE TO VISIT OUR WEBSITE

WARNING: BY READING THIS DOCUMENT, YOU AGREE IT IS ONLY TO BE USED AS AN EDUCATIONAL GUIDE. SPYDER AUTO NOR ITS DEALERS MAKE GU
UNABLE TO CLEARLY UNDERSTAND AND ADAPT THE INFORMATION BELOW, PROFESSIONAL INSTALLATION IS RECOMMENDED.
FOR ANY ISSUES OR GUESTIONS ABOUT YOUR SPYDER PRODUCT, REACH OUT TO OUR TECH SUPPORT TEAM TECHSUPPORT@SPYDERAUTO.COM
IT IS THE INSTALLER'S RESPONSIBILITY TO CONFIRM COMPLIANCE WITH STATE AND LOCAL LAWS

DUCT CAN EXPOSE YOU TO CHEMICALS INCLUDING CHROMIUM (HEXAVALENT COMPOUNDS), WHICH ARE KNOWN TO THE STATE OF CALIFORNIA TO CAUSE CANCER AND FETS OR OTHER REPODUCTIVE HARM. FOR MORE INFORMATION GO TO WWW.P65WARNING.CA.GOV





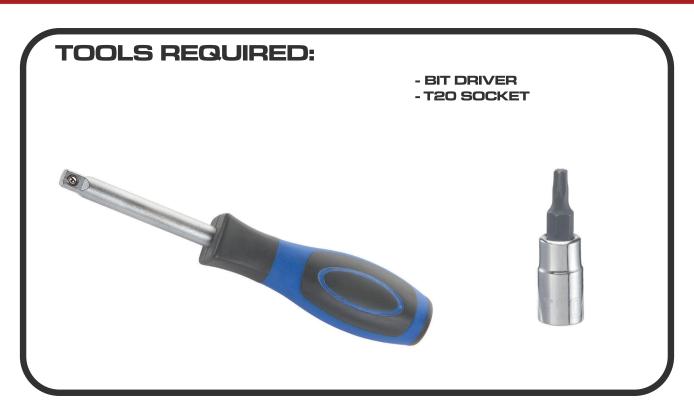



STEP 1:
DISCONNECT THE NEGATIVE BATTERY TERMINAL



STEP 2: OPEN THE TAIL GATE



STEP 3:
REMOVE (2) T20 SCREWS SECURING THE TAIL LIGHT



STEP 4: UNSEAT THE OLD TAIL LIGHT




STEP 5:
DISCONNECT THE TAIL LIGHT HARNESS





#### STEP 6:

REMOVE THE REVERSE BULB SOCKET FROM THE OLD TAIL LIGHT AND REMOVE THE REVERSE BULB (NOTE: NEVER TOUCH BULBS WITH BARE HANDS)

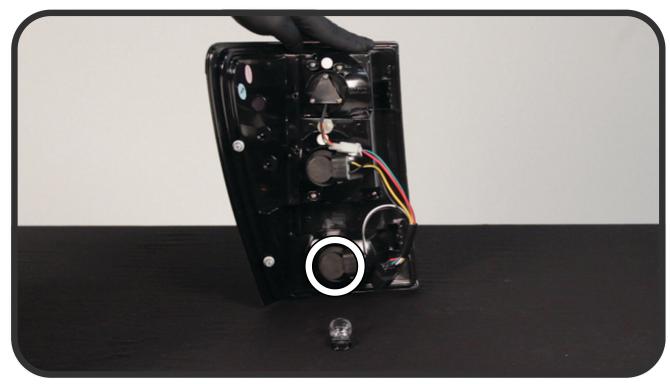

## STEP 7:

TRANSFER THE REVERSE BULB TO THE WHITE AND BLACK WIRE REVERSE SOCKET OF THE SPYDER TAIL LIGHT, THEN REINSTALL THE SOCKET





STEP 8: CONNECT THE SPYDER TAIL LIGHT TO THE TAIL LIGHT HARNESS



STEP 9: SEAT THE SPYDER TAIL LIGHT





### **STEP 10:**

REINSTALL THE (2) T20 SCREWS TO SECURE THE TAIL LIGHT AND CLOSE THE TAIL GATE



## **STEP 11:**

RECONNECT THE BATTERY AND TEST THE FUNCTIONS TO ENSURE THEY FUNCTION PROPERLY