

CANOPY FIXTURES

Induction, Fluorescent
and Metal Halide Fixtures



MultiMax


Multi-functional Lighting For
Multiple Applications

FEATURES & BENEFITS

- AEI's Canopy Lighting** features a variety of Induction, CFL and CMH lamp options:
- **Induction** - 5-Year Warranty with up to 100,000 hour lamp life. 80+ CRI, No Color Shift, Instant Hot and Cold Restart. Operates in hot and cold environments. Ideal for use with sensors in non-cold storage environments.
 - **13-57W CFL Lamps** - 10,000 lamp life plus high CRI. Including Instant On, Instant Restrike, No Color Shift and No Flicker.
 - **CMH** - Has up to 20,000 hours of lamp life. High CRI yields long life. UV block for longer lens life versus standard MH.
 - **This canopy fixture** can be used in garages, schools and retail


SPECIFICATIONS

- HOUSING:** - Heavy die formed aluminum housing with bronze powder coat finish. Consult AEI factory for other available colors.
- REFLECTIVE:** High reflectance white standard. MIRO 4 optional.
- ELECTRICAL:** CFL=120, 277 or Universal Voltage. Induction=120 or 277 volt; CMH=Multi-tap 120, 208, 240, 277 or EHID available in Universal.
- LENS/GASKET:** Clear prismatic impact and vandal resistance polycarbonate refractor. Silicone gasket prevents water entry.
- MOUNTING:** Suitable for low mount ceiling or wall mount.

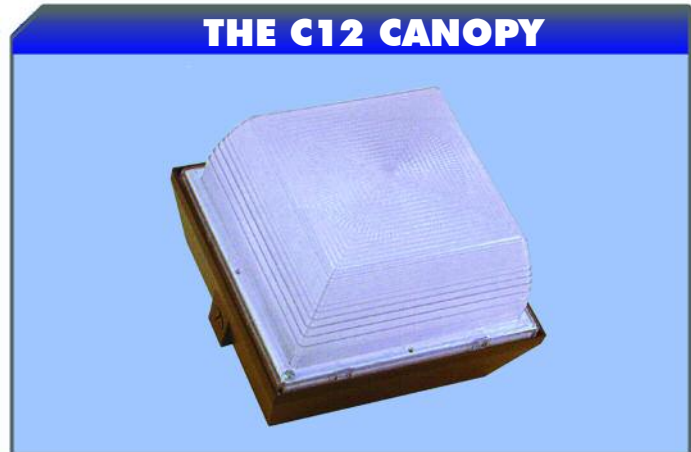


THE C12 CANOPY

DIMENSIONS



C12 Series
L 12" W 12" H 8.5"



*Dimensions are subject to change without notice. Consult factory for details.

ORDERING GUIDE



BRINGING YOU OUT OF THE DARK AGES!

Fixture Model	Wattage	Lens	Voltage	Lamp Color	Mounting & Options
C12					
<p>INDUCTION 55=55 Watts</p> <p>CFL 13F=13 Watts 26F=26 Watts 32F=32 Watts 42F=42 Watts 57F=57 Watts</p> <p>CMH(M) / EHID(E) 35M or 35E=35 Watts 50M or 50E=50 Watts 70M or 70E=70 Watts 100M or 100E=100 Watts 175M or 175E=175 Watts</p> <p>LENS PRPC=Clear, Prismatic Polycarbonate Consult factory for other options</p> <p>INDUCTION - LAMPS 12=120V 27=277V</p> <p>CFL - LAMPS 12=120V 27=277V UNI=Universal Voltage</p> <p>CMH QUAD=120, 208, 240 & 277V</p> <p>INDUCTION - LAMPS 30=3000K 40=4000K</p> <p>CFL - LAMPS 30=3000K 35=3500K 41=4100K NI=No Lamps</p> <p>CMH - LAMPS NA=Not Applicable</p> <p>OPTIONS/MOUNTING MB=Mounting Bracket M4=MIRO 4 Reflector PH=Photo Cell</p>					

AEI LIGHTING INC.
1113 West Birchwood Avenue
Mesa, AZ 85210
TEL 480.733.6594
FAX 480.733.6596
WEB www.aeilighting.com

Project Name _____ Fixture Type _____

Catalog # _____ Quantity _____

ADVANCED ENERGY IDEAS, INC.

C12 CANOPY