

PRODUCT MANUAL

25Ft x 50Ft Tunnel Greenhouse Grow Tent

Model: TMG-GH2550





- Please read the product manual completely before assembly
- Check against the parts list to make sure all parts are received
- Wear proper safety goggles or other protective gears while in assembly

Missing parts or questions on assembly? Please call: 1-877-761-2819 or email: cs@tmgindustrial.com Do not return the product to dealer, they are not equipped to handle your requests

Main specifications

- Overall assembled size : W7.62 x L15.6 x H3 (m) / W25 x L51 x H10 (ft)
- Shoulder height : H1.2 (m) / 4ft
- Door : W1.2 x H2 (m) / 4 x 6.6 (ft)

Prior to assembly

Please read the instructions carefully before installation. It is important to follow your local safety regulations and industry standards during installation. Regulations may include but are not limited to :

- Safety helmets, protective eyewear, and clothing
- Safety harnesses for all elevated workers
- Proper ladder, cage, and safety operation

Check all components and parts before installation. All parts are marked with a part number, please refer to the parts list to make sure you have all parts.

Choose a day with low or no wind to install, assembly is hard in heavy wind. Do not make any alterations to the structure. Do not hang any weights on the frame during installation, including parts. We are not responsible for any damages or injuries caused by inappropriate installation, unauthorized modifications or extreme weather.

This building is not intended for human occupancy.

It is recommended to tape or add foam/rubber on the frame where joints connect and where it touches the cover. This will help extend the life span of the cover.

Read the following item list carefully and count the number of items to ensure that all parts are included prior to setup.

	TMG-GH2550 Part List						
Parts code	Graphical Description						
1		Peak arch tube					
2	····	Upper rafter tube	26				
3		Shoulder tube	22				
3A		Shoulder tube (front and rear truss)	4				
4	88	Roof purlin (horizontal tube)	84				
5	Base plate						
5B	$rac{1}{2}$ Expansion bolt ϕ 14x1		94				
6	Þ	8					
7			4				
8L		Door left vertical tubes	2				
8R		Door right vertical tubes	2				
9		Door horizontal tube	8				
9L	· · · · · · · · · · · · · · · · · · ·	Door frame column left tube	2				
9R		Door frame column right tube	2				
10		Door cross tubes	4				
10A		Door cross tubes	4				
10B		2					
11	<u>a</u> a	Ceiling cross bar	13				

12		Tube clamp	12
13	_ _	Film rolling machine guide tube	2
14		Roll film tube	14
14A		Roll film tube	2
15		Door buckle	2
16		Film rolling machine	2
17		Reed groove	70
17A		Clip spring	70
18	25	Eight clip spring	50
19		Pressure film carrier	26
20		Half round head bolt M6x50	16
21		Self locking bolt M10x70mm and nuts	91
22		Hex bolt M10x70mm and nuts	188
23		Hex bolt M10x30mm and nuts	38
24		Hex bolt M10x100mm and nuts	2

	1		
25	and the second second	Self tapping screw #12x25	390
26		Self tapping screw #12x35	128
27		Square plug	8
28		Round plug $(\phi 25)$	6
29		Braided rope	1 bundle (50m)
30		Top cover film	1
30A		Front and rear door film	2
31	0	Adhesive tape	6
32	and the	Socket wrench	1
33	$\overline{}$	Hex wrench	1
34		Board 150x15x2000mm (not included)	40

Installation steps

Step 1 : Review the whole structure and choose the proper installation site.

- Mark the ground in the final building location with a line showing the positions of base plates, front doors. All lines should be drawn from center to center of all base plate tubes. Diagonal line X must be equal to Y.
- Base plates : all base plates must be installed firmly with expansion bolts (#5B) on this step.



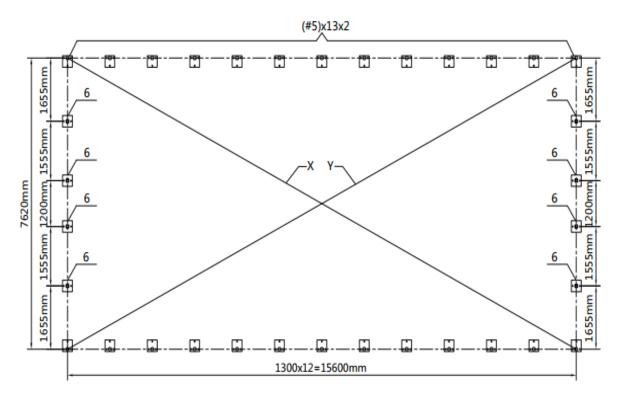


Figure 1

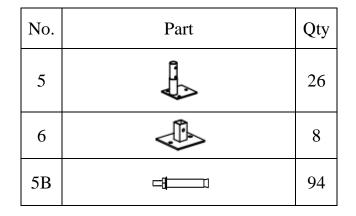


Step 2 : Assemble all trusses.

- The building includes 13 trusses : (2) front and rear truss, and (11) middle trusses.
- Install front and rear trusses.

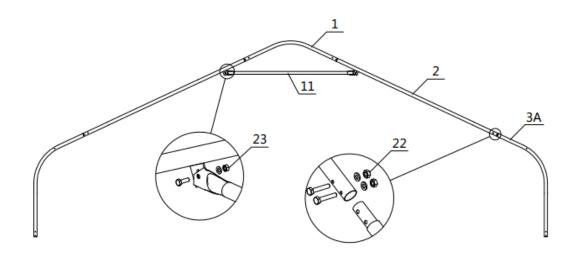



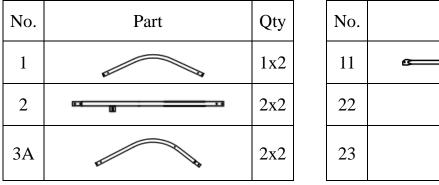

No.	Part	Qty
11	££	1x2
22		8x2
23		2x2

• Install (11) middle trusses.


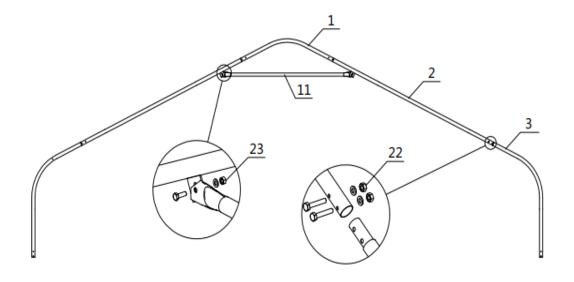


Figure3

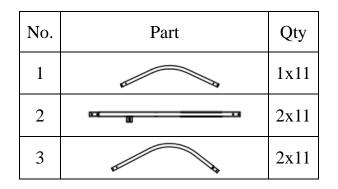

No.	Part	Qty
11	e	1x11
22		8x11
23		2x11

• Lay down all (13) trusses on the ground when the assembly is all completed and before moving to next step, and then wrap (#31) around the sharp points of the joint to avoid friction between the fabric and the interface, resulting in fabric damage.


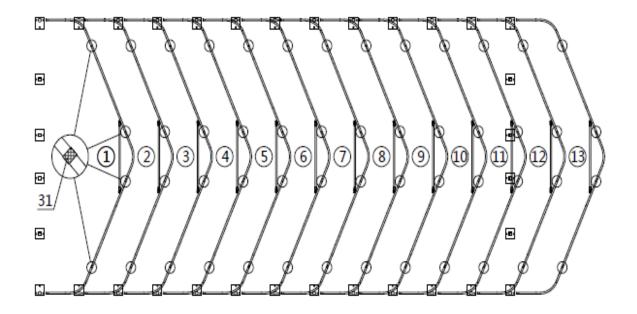


Figure 4


No.	Part	Qty
31	0	2

Step 3 : Put up all trusses.


• Put up the truss, use hex bolt (#22) to secure the truss to the base plates.

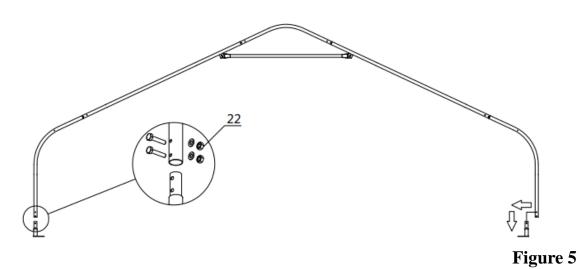


• Connect all purlins, and then wrap (#31) around the sharp points.

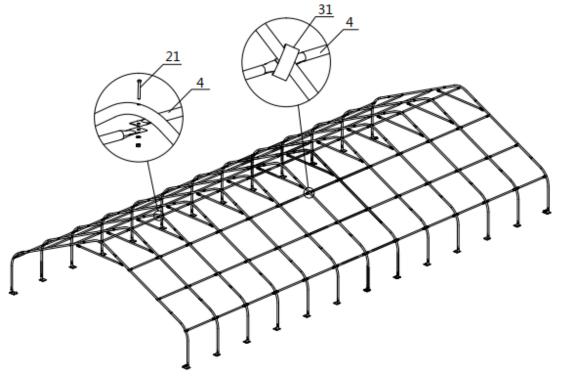

```
Figure 6
```

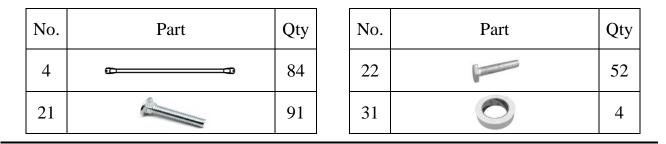



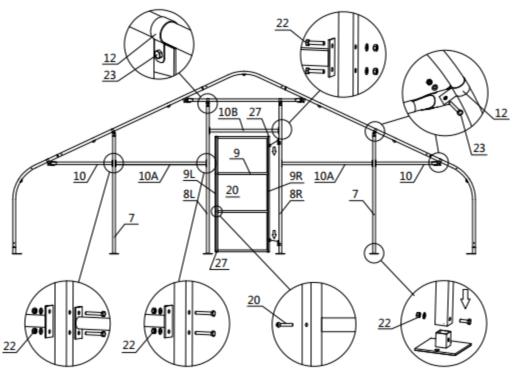


Figure 7

No.	Part	Qty
7		2x2
8L		1x2
8R	- <u></u> »	1x2
9		4x2
9L	· · · · · · · · · · · · · · · · · · ·	1x2
9R		1x2
10	e======	2x2

No.	Part	Qty
10A	 	2x2
10B		1x2
12	() Jo	6x2
20	And and a second second	8x2
22		16x2
23		6x2
27		4x2

Step 5 : Install boards (#34) and reed groove (#17).

- Fix the board (#34) with self tapping screw (#26).
- Fix the reed groove (#17) with the self tapping screw (#25).

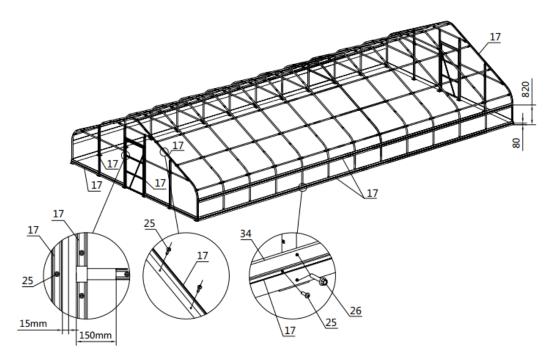



Figure 8

No.	Part	Qty
17		70
25	and the second s	350


No.	Part	Qty
26	C announces	128
34		40

Step 6 : Install front and rear film.

- Lift the film (#30A) and fix the film with a clip spring (#17A) from top to bottom.
- Install door buckle (#15) with self tapping screw (#25).
- Cut the door film as shown.

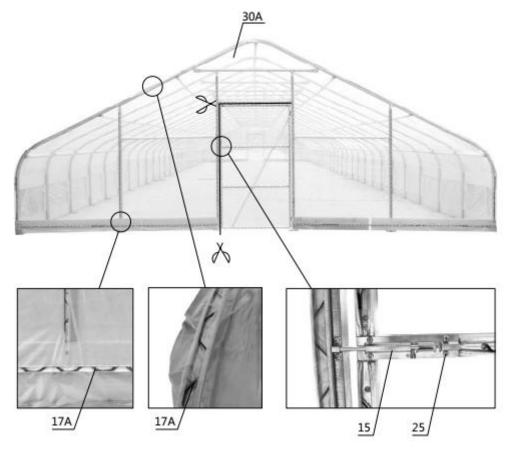




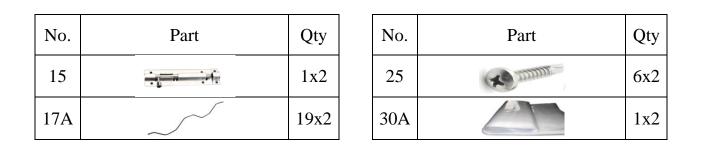


Step 7 : Install top cover film.

• when you are ready to install the roof cover, unpack the cover and position it parallel to the building frame on one side. the cover must be pulled over the top of the truss frame without being snagged or stressed on any frame members. tighten the film evenly to eliminate wrinkles and make the film flat and smooth. Do not over-tighten during the adjustment process, otherwise it will cause unnecessary damage. At this time, you can install a clip spring (#17A) to fix the film.

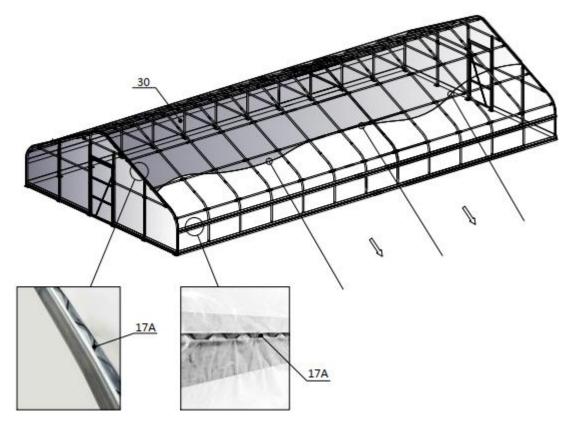




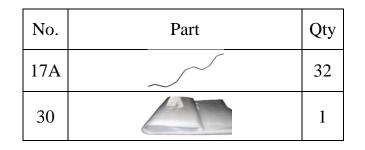

Step 8 : Install roll film system.


• Install the roll film tube(#14), add a round plug(#28) at the end. the film (# 30) is wound on a roll film tube , and clamped with a pressure film carrier (# 19).

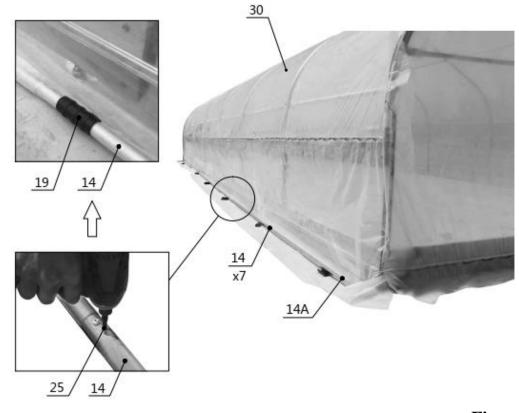



No.	Part	Qty	No.	Part	Qty
14		14	25	and the second second	28
14A		2	28	-	2
19	<i>M</i>	26			

- A round plug (# 28) is put on both ends of the film rolling machine guide tube (# 13), and the guide tube is mounted on the frame with a hex bolt (# 24), and it is required to swing freely. The film rolling machine (# 16) drives the roll film tube (# 14) to be raised and lowered horizontally and flexibly without jamming.
- Install the eight clip spring (# 18) and fasten the braided rope (# 29).

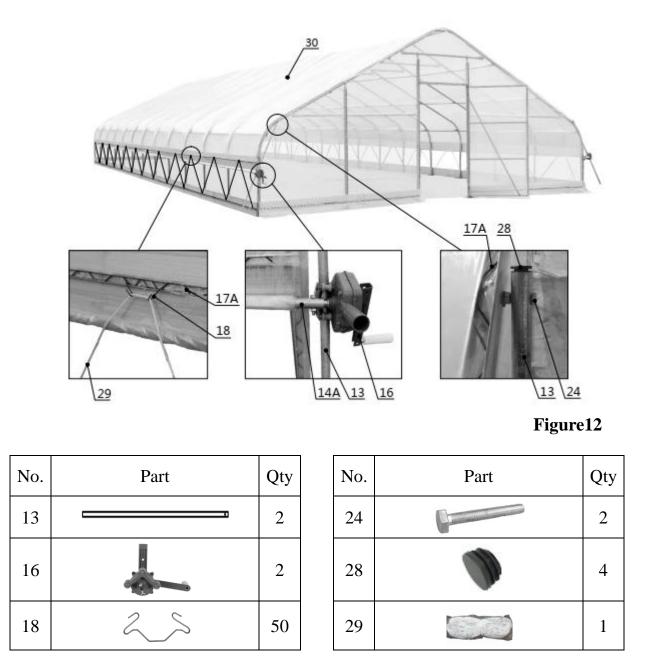

After the Installation

Walk around and inspect the shelter periodically to make sure all components are still firmly secured and the whole shelter is well supported. Check all bolts and nuts as well as all connection points to make sure they are all in good position.

We strongly recommend you remove any snow from the roof immediately. Do not leave any snow load on the roof overnight. Keep 3 feet of clearance on all sides at all times. Do not allow snow to accumulate and pile up on the sides of the building. Otherwise the pressure from the sides will push inwards and could lead to a collapse.