


TT5-2X2P

3-, 4- & 5-Lamp T5HO
Twin Tube Pendant Mount

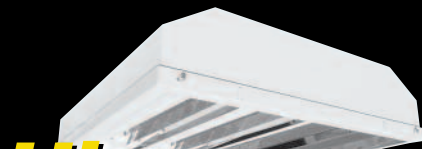

HiMax Energy Saving High-Performance
Fluorescent Lighting Systems

FEATURES & BENEFITS

- **Push Button Access** - Industry Leading Maintenance Advantage giving access to all internal components in seconds without the use of tools and removal of lamps!
- **Over 50% Energy Savings Compared to HID** and old fluorescent systems
- **Longer Lamp Life For T5HO!** 25,000hrs @ 3hrs/start and 35,000hrs @ 12hrs/start
- **95% Lumen Maintenance For T5HO** compared to Metal Halide that depreciates 40-60%
- **Vented Housing** construction for optimal ballast performance and long life
- **Instant On...Instant Restrike...No Flicker!** Color consistent across all fixtures
- **Auto On/Off Occupancy Sensors Factory Installed** and paired with Programmed Start ballasts
- **Superior Visual Comfort Over HID** with higher CRI from AEI's fluorescent fixtures including a wide range of color temperatures

SPECIFICATIONS


HOUSING: - Code Gauge steel body with post powdercoating standard. Properly vented housing keeps ballast cool. Cold storage housing without venting available on request.

REFLECTIVE: Specular Miro4® reflectors standard. White reflectors are optional. Consult AEI for other reflector options.

ELECTRICAL: Wired per specified voltage using electronic ballast rated for 75 degrees Celsius (C). 90 degree Celsius ballast rating available for high ambient applications. The TT5-2X2P fixtures are U.L. Listed for damp locations. TT5 lamps are rated at 15,000 & 20,000 hours.

MOUNTING: The HiMax TT5-2X2P fixtures are designed to be pendant mounted.


Featuring "Push Button Access"

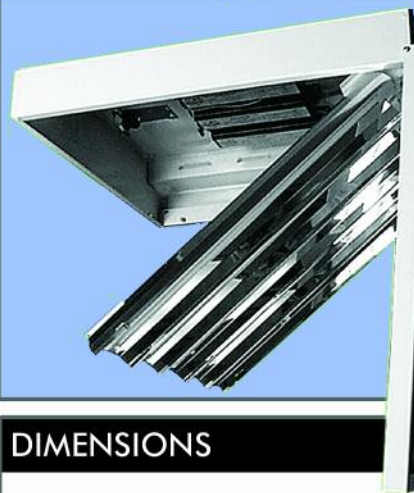


- EASY ACCESS**
No Parts To Drop
- REDUCED LABOR**
Opens In Seconds
- SAVES MONEY**
Exclusive Features

Wireway access in seconds without removing lamps or use of any tools!

DIMENSIONS

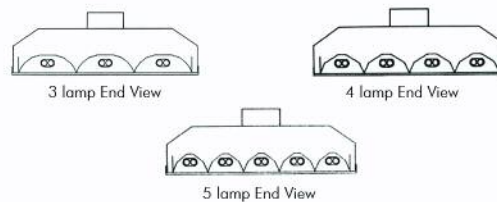

	Length	Width	Height
TT5-2X2P-3, 4 & 5 LAMP	24"	24"	7.75"

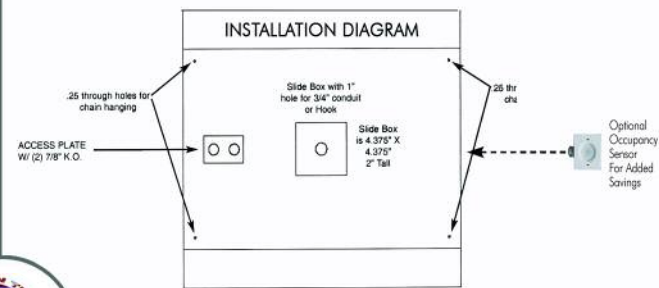

*Dimensions are subject to change without notice. Consult factory for details.

ORDERING GUIDE



BRINGING YOU OUT OF THE DARK AGES!

Fixture Model	Housing	# Of Lamps Wattage	Lens	Voltage	Lamp Color	Options	Mounting
TT5-2X2P							
		# OF LAMPS 3=3 Lamps 4=4 Lamps 5=5 Lamps WATTAGE 40=40 Watts 50=50 Watts 55=55 Watts	CL=Clear Acrylic PR=Prismatic PC=Polycarbonate VR=Vandal Resistant Leave Blank If No Lens	VOLTAGE 12=120V 27=277V 34=340V 48=480V UN1=Universal UN190=90C Universal	30=3000K 35=3500K 41=4100K 50=5000K Leave Blank If No Lamps	SENSORS OC1=Aside Sensor OC3=360 Degree Sensor OCL1=360 Degree Low Temp. Sensor Consult Factory For More Options CORDS / PLUGS X'C=Length + Cord Only X'CKP=Length/Cord + Style/Plug Consult Factory For More Options BALLASTS EMXXXX=Emergency Ballast/Lumens DIM=Dimming Ballast HOUSING/REFLECTORS WH=White Reflector CT=Cold temp. (no venting) CST=Custom Consult Factory For Custom Applications & Custom Ordering Number	VH=V-Hook HK=3/4" Hook GPLX=Grippe + Style (L,S,T,Y) Consult Options Guidelines For Grippe Details HUB=3/4" Hub X'ST=Length + Galvanized Stem SB=3/4" Slide Box Assembly Hub and Stem Optional SP=3/4" Single Point Bracket Hub and Stem Optional

CONSULT
AEILighting.com
for
Photometric
Information
On This
Fixture

AEI LIGHTING INC.
1113 West Birchwood Avenue
Mesa, AZ 85210
TEL 480.733.6594
FAX 480.733.6596
WEB www.aeilighting.com

Project Name _____ Fixture Type _____

Catalog # _____ Quantity _____

ADVANCED ENERGY IDEAS, INC.

TT5-2X2P