


Sewage Simplex Control Panel 220V



- Lift Station control for 240 VAC 2 HP or less pump.
- Pump operation will be on demand using an on float and off float.
- Pump Test switch inside the enclosure.
- High water alarm will use a N/O float.
- Alarm Test and Silence switch in the door.
- Enclosure $H \times W \times D = 10 \times 8 \times 4''$

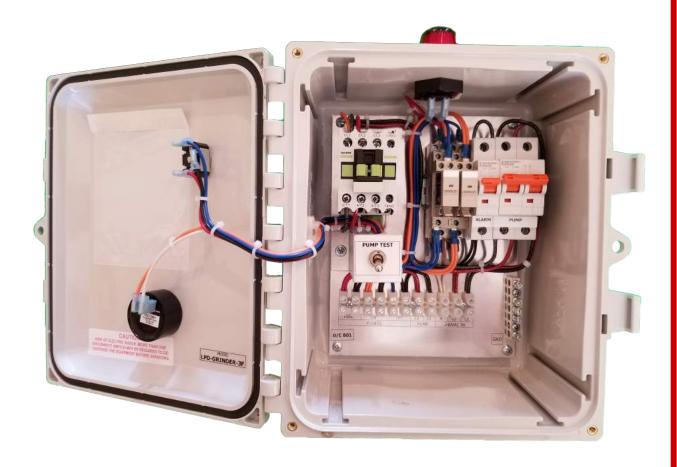