


STATICO

Static Control & Cleanroom Products

S1400

Description

The S1400 Series is a two-layer, high temperature, solder and chemical resistant rubber matting. This product is ideal for static free workstations where repair work and soldering is performed. The first layer, available in Blue, Gray, or Green with Paper Finish, is a static dissipative work surface & the second layer, available only in Black with Diamond Finish, is a conductive one. The 1400 series provides the highest quality rubber matting in the industry.

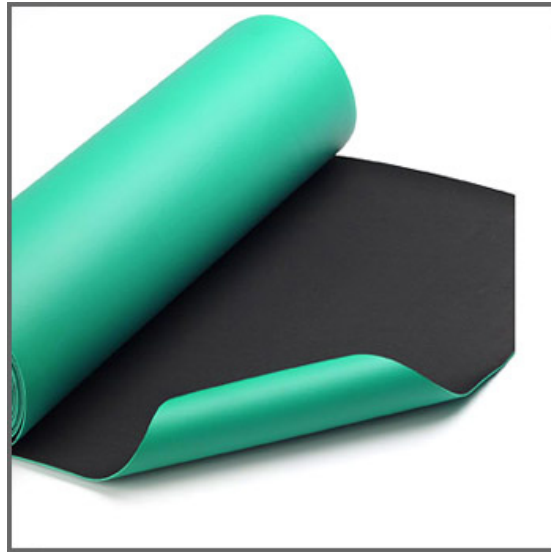

Specifications

Colors	Blue/Black, Gray/Black, & Green/Black (NEW for Led Free stations).
Thickness	60 mils (1.5 mm)
Tensile Strength	1000 psi (min), ASDM-D-412
Elongation @ Break	300% (min), ASDM-D-412
Durameter (Shore A)	60 min, ASDM-D-2240
Resistance from Surface	
To Groundable Point RTG	8 x 10 E6 ohms, EOS/ESD-S4
Resistance between Two Points on Surface, RTT	2 x 10 E7 ohms , EOS/ESD-S4
Charge Decay Time	0.01 Seconds, FTMS 101C
5,000V to 50V	(Technical Zero) Method 4046C

Standard Roll Sizes

24" x 50' x 0.060"

30" x 50' x 0.060"

36" x 50' x 0.060"

48" x 50' x 0.060"

Cuts to special sizes are available upon request.