

LifeSmart 奇点开关模块说明书

Typical Graphic Layout | Scale: 1/1

尺寸	66*66mm
纸张	80g书纸
工艺	

正面

LifeSmart®
Simply Brilliant

CUBE Switch Module Model:LS176/177
Setting up your LifeSmart CUBE Switch Module
User Guide V1.0

折叠

PRODUCT INTRODUCTION

LifeSmart CUBE Switch Module is small in size and easy to install. It is suitable for 80, 86, 120 and panels of other specifications, and it can easily upgrade traditional switches to intelligent ones.

LifeSmart CUBE Switch Module supports two-way communication and remote control via mobile phones. Users can easily control the switch at any time and any place through the mobile phone. Also, they can set timing tasks, and implement linkage function with other intelligent devices including Motion Sensors, Window/Door Sensors etc., to trigger Smart Scenes including Welcome Home Lighting, Lights Out When Leave and more.


折叠

SPECIFICATIONS

Size	42*32*16mm
Weight	25g
Operating voltage	100-240V AC, 50/60Hz
Operating temperature	-5~45°C
Operating humidity	5-90%
Communication protocol	CoSS
Wireless distance	100m (open field)
Power consumption	0.3W
Wiring	L/N wiring
Maximum load	300W (single circuit resistive load), 150W (single circuit inductive or capacitive load)

折叠


WIRING INSTRUCTIONS

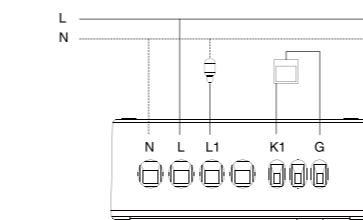

N: Null line input
L: Live line input
L1: Live line output
K1: Switch control line input
G: Common line to the panel input

折叠


WIRING INSTRUCTIONS

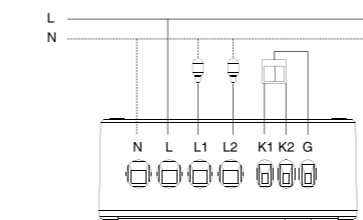

N: Null line input
L: Live line input
L1: First live line output
L2: Second live line output
K1: First switch control line input
K2: Second switch control line input
G: Common line to the panel input

折叠

INSTALLATION INSTRUCTIONS

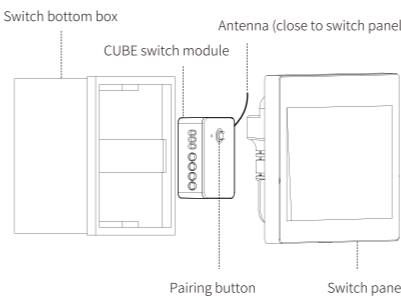

折叠

INSTALLATION STEPS

- Cut off the power leading to the switch and make sure that the wiring is not charged. Take off the switch panel;
- Place switch module and install it according to the wiring instruction, make sure all the wires are placed firmly;
- (Optional) If you want to run a test, please lead the power back on, press and hold the pairing button for 5 seconds, wait until the pairing indicator flashes. Follow the instructions on LifeSmart App to pair your devices. When pairing is finished, you can control the switch now with your mobile phone;
Warning: This step involves high voltage and should be done by a professional electrician.

折叠

INSTALLATION STEPS

- Place switch module and wires into the switch bottom box neatly, make sure the antenna is placed near the switch panel. Fix the switch panel;
- Lead the power back on and operate on the switch panel to check if it works properly

Notes:
This installation involves high voltage operation, you must read the guide before the installation and ask for a professional electrician. LifeSmart does not take any responsibility if anything damage is caused due to not strictly following the user guide.
This product needs to work with over-current protection device with maximal current no more than 10A which will cut off the power if there is a short circuit or over-current.
SET UP step can be skipped if STEP 3 in installation steps is complete.

反面

SET UP

LifeSmart CUBE Switch Module needs to be paired with Smart Station to engage Smart Home system network.

- After configuration of the Smart Station, choose "Add Device" in LifeSmart App, select "CUBE Switch Module" to enter pairing process;
- Press the first button of your switch 10 times (repeat switch on and off for 5 times)until you hear "ta-ta" sounds to start pairing;
- Follow the instructions on the app to complete the pairing process;

SET UP

- If a time-out error occurs, please repeat step 1-3 until it's paired successfully;
- CUBE Switch Module can be used for timer-switch, triggering smart scenes and many more occasions. Please simply refer to LifeSmart App.

IN YOU PACKAGE

- CUBE Switch Module 1
- User Guide 1

WARRANTY DESCRIPTION

Thank you for purchasing this LifeSmart product. In order to protect your rights, please read the following content carefully: The warranty period of our company's products is one year from the date of purchase or longer if local laws impose a longer minimum term, in which case the minimum term is the warranty period. During the warranty period, any faults caused by the product itself or for quality problems that arise under normal usage, LifeSmart will provide a free replacement.

ATTENTION

- The following conditions are not covered by the warranty:
- Product failure or damage caused by installation, use, and maintenance that is not in accordance with the product instructions;
 - Products beyond the warranty period;
 - Products that have the barcode tampered with or removed;
 - Devices that have been tampered with or customized outside of LifeSmart Terms Of Service as on the LifeSmart App and website;

ATTENTION

- User-caused damage, such as inappropriate voltage input, high temperature, accidental spillage, physical damage, etc;
- Product failure or damage caused by force majeure such as earthquakes, fires, or floods;
- Product failure or damage caused by other problems except the product itself.

User support e-mail address
support@lifsmart.com

Website
www.lifsmart.com



DECLARATION

LifeSmart is a trademark of Hangzhou LifeSmart Technology Co., Ltd. As for the trademarks, product logos and product names from other companies presented within this manual, they are possessed by their own right holders. Without our written permission, no entity or individual shall extract, copy or disseminate in part or the whole of the manual contents in any form. Due to product version upgrades or other reasons, content of this manual may change. Our company reserves the right to change the contents of this manual without any notice.

This manual is used only for instructional purposes. We strive to provide accurate information in this manual, but we are not able to ensure that the content of this manual is current. Statements, information and advice in this manual do not constitute any expressed or implied assurance. Updated manuals are available on our website at www.lifsmart.com or by contacting our team.

DECLARATION

DECLARATION OF CONFORMITY
Hereby, LifeSmart declares that the radio equipment type is in compliance with Directive 2014/53/EU. The full text of the EU declaration of conformity is available at the following internet address: <http://global.lifsmart.com/ce/docs/>



Notice: This device may be used in each member state in EU.

WEEE Directive Compliance

Device labelled with this symbol should not be disposed with other household wastes. It shall be handed over to the applicable collection point for the recycling of waste electrical and electronic equipment.



Manufacturer: Hangzhou LifeSmart Technology Co., Ltd.
Address: 10-11th Floor, Building A, SUPCON Information, 352 Binkang Road, Binjiang District, Hangzhou, Zhejiang, CHN



Facebook: lifsmarthome
Twitter: lifsmarthome
Copyright © 2020 LifeSmart Inc. All Rights Reserved. P/N: 88004610 A2