



## SmartReader Plus 6

### Eight-Channel Temperature Data Logger


The SmartReader Plus 6 data logger is ideal for monitoring temperature over a wide range. Easily and accurately record temperature from any J, K, S, T or E type thermocouple probe. With seven inputs for thermocouple probes and an on-board cold-junction thermistor, the SmartReader Plus 6 is one of the most versatile thermocouple data loggers available.

#### APPLICATIONS

Monitor performance of gas-fired heating equipment, verifying concrete curing temperatures, process verification, etc.

#### GENERAL SPECIFICATIONS

Size:	107mm x 74mm x 22mm (4.2" x 2.9" x 0.9")
Weight:	110 g (3.75 oz)
Case Material:	Noryl® Plastic
Battery:	3.6 volt Lithium
Resolution:	12-bit (1 part in 4096)
Mounting:	Magnetic backing or locking eyelet
Clock Accuracy:	± 2 seconds per day
Sampling Methods:	Continuous (First-in First-out)*, Stop When Full (Fill-then-stop) *Not available with sample rates faster than eight seconds
Operating Limits:	-40°C to 70°C (-40°F to 158°F) and 0 to 95% RH (non-condensing)
PC Requirements:	Windows PC with at least one free USB or serial port (depending on interface)
Software Requirements:	TrendReader® 2 (Compatible with Windows XP, Vista, Windows 7 and Windows 8 [32 bit & 64 bit])
Memory Size:	32 KB (capable of storing up to 21,500 readings) (3 models available) 128 KB (capable of storing up to 87,000 readings) 1.5 MB (capable of storing up to 1,048,000 readings)
Sampling Rates:	User selectable rates from 25 per second to once every eight hours (BP-101 battery pack or PS-201 power supply required for sampling rates faster than eight seconds)
Number of Channels:	Eight (one internal thermistor for cold-junction compensation and seven thermocouple inputs)

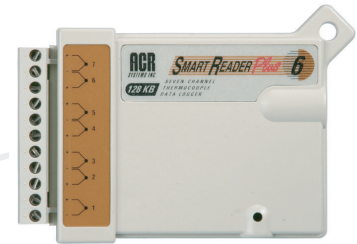

#### SENSOR SPECIFICATIONS

##### Internal Temperature Sensor

Type:	NTC Thermistor - 10,000 Ohm @ 25°C (77°F)
Range:	-40°C to 70°C (-40°F to 158°F)
Accuracy:	±0.2°C over the range of 0°C to 70°C (± 0.3°F over the range of 32°F to 158°F)
Resolution:	0.03°C (0.05°F) @ 25°C; better than 0.07°C (0.12°F) between -25°C and 70°C (-13°F and 158°F); better than 0.13°C (0.23°F) between -40°C and -25°C (-40°F and -13°F)

##### Thermocouple Wire

	Range	Resolution
J Type	-50°C to 600°C (-55°F to 1100°F)	0.30°C (0.55°F)
K Type	-100°C to 1150°C (-145°F to 2100°F)	0.50°C (0.90°F)
S Type	0°C to 1450°C (32°F to 2642°F)	1°C (1.8°F)
T Type	-200°C to 400°C (-325°F to 750°F)	0.40°C (0.75°F)
E Type	-50°C to 680°C (-58°F to 1250°F)	0.24°C (0.44°F)

**Accuracy:** ±0.5% of range + resolution

#### ORDERING INFORMATION

Item:	Cat#:	Item:	Cat#:
SRP-006-32K	01-0013	SRP-006-1.5M	01-0151
SRP-006-128K	01-0122		

ACR Systems Inc  
Toll-Free: 1.800.663.7845  
Tel: 1.604.591.1128  
sales@acrdatasolutions.com

[www.acrdatasolutions.com](http://www.acrdatasolutions.com)  
ISO 9001 Certified

ISO9000\SPECIFICATIONS\SRP6.pdf



Rev:12 - 11/07/12

