

For the latest instruction manual revisions, software updates, liability policy, and warranty information, visit the KDE Direct website at: <http://www.KDEDirect.com>.

All technical inquiries, contact support@kdedirect.com.

IMPORTANT: To reduce the risk of fire, bodily injury, and damage to the equipment, read through Instruction Manual before operating UBEC and always follow all instructions.

- ⚠ KEEP OUT OF THE REACH OF CHILDREN.
- ⚠ Pay attention to the maximum voltage allowed:
 - KDEXF-UBEC Series** 7.4V (2S LiPo) – 34.8V (8S LiHV) 35V Max.
 - KDE-UBECUVC Series** 7.4V (2S LiPo) – 60.9V (14S LiHV) 65V Max.If model is not listed, maximum voltage is stated in specifications.
- ⚠ The KDEXF-UBEC and KDE-UBECUVC Series are high-frequency switching regulators and provide power output for the peripheral equipment.
- ⚠ Never operate the UBEC beyond the specifications stated on hardware. Serious injury or property damage can result from misuse.
- ⚠ Ensure the polarity is correct with the power supply to the UBEC power source leads. Reverse polarity may cause fire and serious injury, and will immediately damage the UBEC beyond warranty coverage.
- ⚠ Ensure the UBEC is installed in a safe location and protected to prevent any exposed connections and solder-locations to touch conductive areas.
- ⚠ Always use electronics-grade solder and make sure to use proper soldering techniques and equipment. Poor soldering technique is a common cause of in-flight failure and UBEC damage. Ensure all connectors are protected with insulation and heat-shrink to prevent unwanted conduction and shorts.
- ⚠ Check all connectors for secure connection before flight. Disconnection due to vibration and flight-conditions can result in a dangerous loss of control and potential damage and serious injury.
- ⚠ Do not disassemble or open the UBEC. Opening of the case or removal of shrink-wrap may cause damage to the internal components, void all warranty claims, and yield unsafe operation.
- ⚠ Install the UBEC in a location with adequate airflow to maintain cool temperatures and increase amperage capability.
- ⚠ Use caution when operating in wet environments or rain. Water can damage the UBEC and cause malfunction and failure of the electrical components.
- ⚠ This is a high-power, electromechanical device with the potential to be very dangerous – always handle with caution and be aware of proper operation.

- ⚠ KDE Direct is not responsible for the use of this Product(s) or for any damages or injuries caused or sustained by its usage. Always observe all laws and instructions regarding the use of this Product(s), and the operation of devices using this Product(s).
- ⚠ This product may contain chemicals known in the State of California to cause cancer and/or birth defects or other reproductive harm. Do not ingest or attempt to ingest this product.
- ⚠ **NOTE:** The KDEXF-UBEC, KDE-UBECUVC Series should never be operated in series or parallel with another Battery Eliminator Circuit or power-supply (such as an external LiPo receiver pack), or damage to the UBEC can occur.


The KDE Direct UAS UBEC (Universal Battery Eliminator Circuit) Series is designed to eliminate the need for an external battery pack, and provide voltage-regulated power for the peripheral equipment. The UBEC allows for simple adjustment of the regulated output voltage for direct compatibility to your electronics and power applications.

For high-power applications, three (3) regulated power-leads are provided to the peripheral equipment for a wide-range of applications - including redundant power to critical items, such as flight-controllers, autopilots, receivers, and video equipment.

For UAS applications, dual UBECs can be used: (1) a 5V or 6V power output for the flight-controller electronics and (2) an 8V or 12V output for the professional video and/or industrial equipment.

UBEC INSTALLATION AND WIRING

(-) TO POWER SOURCE
(BLACK POWER INPUT LEAD)

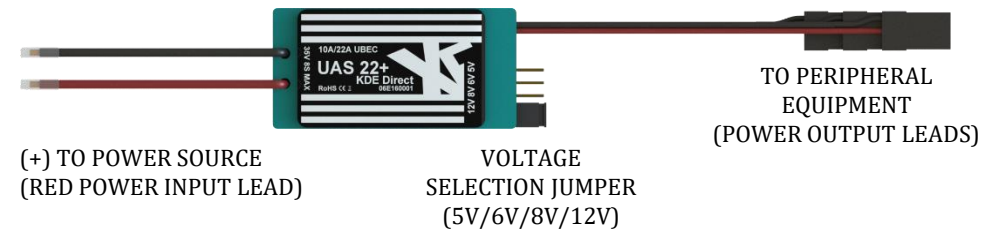

Pay close attention to proper wiring as shown in the diagram above. Ensure the polarity is correct and proper soldering techniques are used when connecting the power source and peripheral equipment to prevent damaging the UBEC. Voltage is selected via the two-pin jumper and can be adjusted before or during operation to control the level of voltage to the peripheral equipment.

UBEC SETUP AND OPERATION

The UAS UBEC Series allows for operation of multiple electronics and other high-power requirements; commonly needed when linear BECs are not capable of handling the power required (such as those included in many off-brand ESCs) or when using OPTO-Isolated ESCs (such as the [KDE Direct UAS Electronic Speed Controller \(ESC\) Series](#)).

1. Select the desired output voltage to the peripheral equipment using the included jumper. Simply relocate the jumper to the desired voltage designation and the internal processor will monitor the accurate output.
 - ⚠ **NOTE:** make sure the connected peripheral equipment is capable of handling the set voltage, or damage to the equipment can occur.
 - ⚠ **NOTE:** if the jumper is misplaced or missing during operation, the voltage will default to 5.0V nominal output immediately to prevent damage to the peripheral electronics.
2. The UAS UBEC has three peripheral equipment power output leads. Servo connectors are intended to carry up to 5A of current continuously each. Use y-harnesses, multiple power input ports on the peripheral equipment, or replace with alternate connectors to provide the most current if required.
3. Power the UBEC through the power-source leads. The UBEC will send the correct voltage to the peripheral equipment leads under these inputs:
 - ⚠ When the 12V selection is used, the input voltage must remain above 12.6V to maintain a consistent output voltage of 12V during use. In this regard, 4S and higher-cell LiPos (or a capable power-supply) are required to maintain consistent voltage during operation.
 - ⚠ When the 8V selection is used, the input voltage must remain above 8.6V to maintain a consistent output voltage of 8V during use. In this regard, 3S and higher-cell LiPos (or a capable power-supply) are required to maintain consistent voltage during operation.
 - ⚠ When the 6V selection is used, the input voltage must remain above 6.6V to maintain a consistent output voltage of 6V during use. In this regard, 2S and higher-cell LiPos (or a capable power-supply) are required to maintain consistent voltage during operation.
 - ⚠ If the input voltage drops below the set voltage selection, the voltage will reduce at 0.6V below the level of input.

As an example, if a 2S LiPo is used and running at 7.4V, the output will be limited to 6.8V during operation when using the 8V or 12V voltage selection.

LIMITED WARRANTY

KDE Direct, LLC (KDE Direct) warrants to the original purchaser that the Product(s) will be free from defects in materials and workmanship for a period of one (1) year from the date of purchase. This warranty does not cover abuse, neglect, or damage to the Product(s) from preventable failure methods, such as incorrect wiring, reverse polarity, voltage exceeding the maximum specification, or amperages exceeding the maximum specification (overloading).

The full definition and terms of this limited warranty are available at: <https://www.kdedirect.com/pages/warranty-and-returns-policy>.

LIMITS OF LIABILITY

All of KDE Direct's sales are subject to its Liability Policy, available at: <http://www.kdedirect.com/pages/liability-policy>. To the extent permitted by law, KDE Direct makes no other warranty or representation, and **HEREBY DISCLAIMS ANY AND ALL IMPLIED WARRANTIES, INCLUDING, WITHOUT LIMITATION, THE IMPLIED WARRANTIES OF NON-INFRINGEMENT, MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.** The purchaser acknowledges that they alone have determined that the Product(s) will suitably meet the requirements of the purchaser's intended use.

KDE DIRECT SHALL NOT BE LIABLE FOR SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, LOSS OF PROFITS OR PRODUCTION OR COMMERCIAL LOSS IN ANY WAY, REGARDLESS OF WHETHER SUCH CLAIM IS BASED IN CONTRACT, WARRANTY, TORT, NEGLIGENCE, STRICT LIABILITY, OR ANY OTHER THEORY OF LIABILITY, EVEN IF KDE DIRECT HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES. FURTHER, IN NO EVENT SHALL THE LIABILITY OF KDE DIRECT EXCEED THE INDIVIDUAL PRICE OF THE PRODUCT(S) ON WHICH LIABILITY IS ASSERTED. As KDE Direct has no control over use, setup, final assembly, modification, or misuse, no liability shall be assumed nor accepted for any resulting damage or injury. **By the act of use, setup, or assembly, the user accepts all resulting liability.** If the purchaser or users are not prepared to accept the liability associated with the use of the Product(s), purchaser or users are advised to return the Product(s) immediately in new and unused condition to the authorized dealer or KDE Direct.

Always observe all laws and instructions regarding the use of this product, and the operation of devices using this product.

KDE Direct reserves the right to change or modify its [Warranty and Return Policy](#) and its [Liability Policy](#) at any time without prior notice.