ULTRA FLOOR-TO-CEILING

INSTALLATION GUIDE: 1-Sided & 2-Sided

RECOMMENDED TOOLS: Tape measure, Level, Pencil, Electrical drill, Stud finder, Hammer, and Clamps

PACKAGE CONTENTS

QTY	Description
1 set of 2	Ultra Floor-to-Ceiling Frame
40	¼" Self-tapping Screws
2	1" Square Couplers
1 set of 2	Backer Channel*

*Backer channel not included for 2-Sided Floor-to-Ceiling.

INSTALLATION STEPS

IMPORTANT: When securing the FTC to a location, use the approriate mounting fasteners. There are 4 fastener locations on the top and bottom brackets.

STEP 1: MARK SCREW HOLES
Mark the screw holes for the mounting brackets in the desired mounting location.

STEP 2: MEASURE CEILING HEIGHT
Measure the ceiling height in the location you will mount the frame.

STEP 3: MAKE CALCULATIONS
Calculate the height of your ceiling, then subtract 60 $^3/_{16}$" (the height of the top frame, with connector) to give you the measurements for your bottom rail.
(For example: 96" - 60 $^3/_{16}$" = 35 $^{13}/_{16}$")

STEP 4: MARK BOTTOM FRAME
Mark the bottom frame to determine the cut location.

STEP 5: CUT FRAME
Cut the frame in marked location using a metal-cutting hack saw.
Note: Do not use a metal cut off wheel as the heat will damage the product.

STEP 6: INSTALL COUPLERS
Install the 1" square couplers to connect the rails. Ensure that the holes for the HZ rails and/or backer channel are lined up in the desired location.
PRO TIP: Pre-drill holes before installing the Floor-to-Ceiling mount.
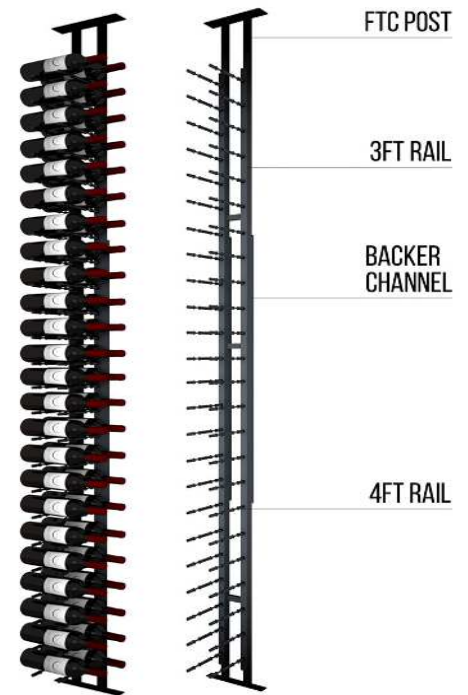
STEP 7: MOUNT BRACKETS
Mount the brackets to the ceiling then the floor using the appropriate anchors. Do not over-tighten.

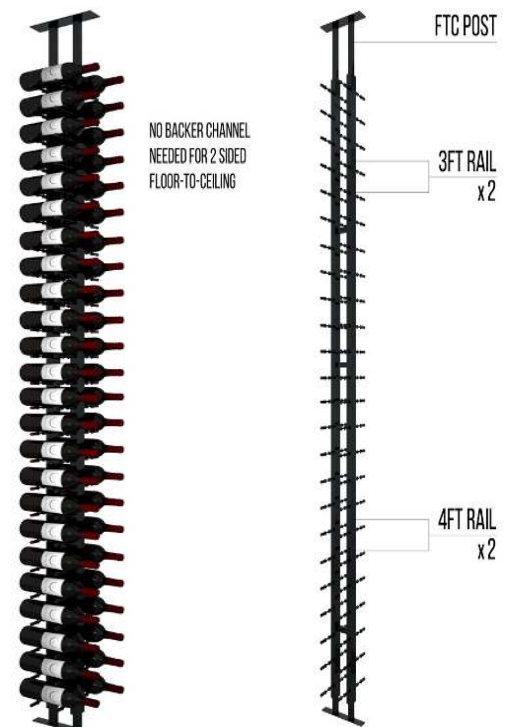### STEP 8: MOUNT RAILS AND/OR BACKER CHANNEL
Mount rails and/or backer channel to frame. Use all mounting holes to fasten rails securely. **PRO TIP:** Use clamps to hold rails in place while mounting.

STEP 9: INSERT END CAPS AND DOME CAPS
Add the finishing touch by inserting end caps and dome caps. Congratulations!

FTC POST
3FT RAIL
BACKER CHANNEL
4FT RAIL

1-Sided Floor-to-Ceiling

NO BACKER CHANNEL NEEDED FOR 2 SIDED FLOOR-TO-CEILING

FTC POST
3FT RAIL x2
4FT RAIL x2

2-Sided Floor-to-Ceiling

Installation Instructions