


glim

instructions for use

1. Before using the luminaire for the first time, the battery has to be fully charged with the USB-C-cable, until the indicator light turns green (100% after approx. 4 hours charging time). The indicator light shines red during the charging process. The charging process has to be made indoors. The protection class IP44 is guaranteed, when the USB-C-charging socket is covered again by the USB-C-cover after the charging process (picture 3).
2. Compose the luminaire: Place the magnetic luminaire pole on the luminaire base (picture 1). Alternatively position the luminaire pole on a metallic surface (picture 2).
3. Switching on/off and dimming in stages by operating the switch button (picture 1):
 - level 1 -> switching on the luminaire and 25% of the maximum light intensity
 - level 2 -> 50% of the maximum light intensity
 - level 3 -> 100% of the maximum light intensity
 - level 4 -> switching off the luminaire
4. With a fully charged battery the luminaire can be used as follows:
 - approx. 7 hrs. at 100% (level 3)
 - approx. 14 hrs. at 50% (level 2)
 - approx. 28 hrs. at 25% (level 1)

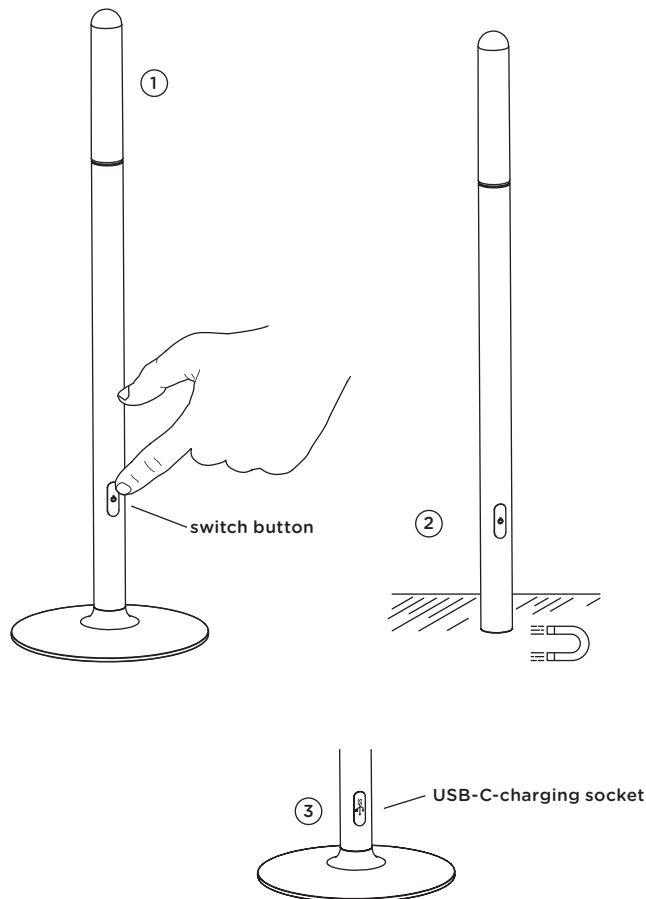

technical information:

LED / 2700K
 system performance: 0,5 W/15 lm
 NiMH battery 3x 1000 mAh
 1,2 m USB-C-cable (included)
 5V DC 1,5A, USB-charger (not included)



IP44 protection class



safety class 3




luminaire is suitable for mounting on normal inflammable fixing surfaces.



conformity mark



maintenance:



This luminaire contains built-in LED lamps and a battery. These can be replaced by the producer in case of a failure. In this case, please get in touch with your retailer.

care:

Regularly clean luminaire from dirt and deposits. Do not use a high pressure cleaner for cleaning. Please note care instructions at www.IP44.de.

safety:

We assume no accountability for damages which are a result of non-appropriate mounting or application of the luminaire. Modifications on the luminaire will result in loss of warranty.

instruction:

The luminaire may not come into contact with highly acidic or alkaline soils, or with other aggressive substances, chemicals or fertilizers.

FAQs:

You will find answers to frequently asked questions about the product on our website www.IP44.de.