




T-150-12

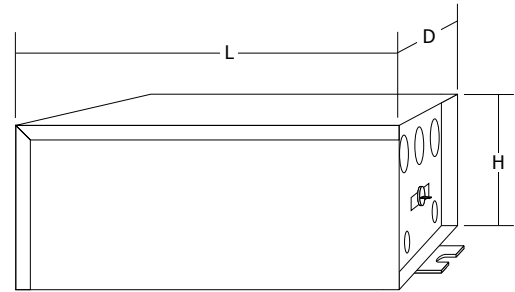

Description:

The 150 watt 12 volt magnetic remote mount transformers convert line voltage into 12 volt power and are protected by fast-acting circuit breakers. The safe-to-touch low voltage output powers Monorail systems up to 150 watts using 12 volt lamps. All 12 volt remote magnetic transformers are LED compatible with 12 volt AC LEDs.

Power Input:

- 120 volts AC 1.25 Amp
- 230 volt AC 0.65 Amp
- 277 volt AC 0.54 Amp

Power Output:

12 volts AC 150 watt 12.5 Amp

Installation:

Remote magnetic transformers must be installed in an accessible location, such as an attic or in a closet, up to 20 feet from the power feed canopy. Plug in version available.

Dimming:

Halogen - 450 Watt Magnetic Low Voltage Dimmer. Compatible dimmers are connected on the line voltage side of transformers. Some buzzing may occur at low levels and may be reduced with a de-buzzing coil. Visit www.edgelighting.com for up-to-date LED dimming information.

Dimensions:


8.75"(L) x 4.4"(D) x 3.8"(H)
(22.2cm x 11.2cm x 9.7cm)

Weight:

8.41 lb (3.81 kg)

System	Power/Voltage Output	Type
T	150 - 12	Standard 120V (leave blank)
T Remote Transformer	150-12 150 Watt 12 Volt	2 230V 50Hz 3 277V 60Hz

Compatible Power Feed Canopies					
<input type="checkbox"/>		MP MP Monorail Power Feed	4RD 4" Round Canopy	1 1 1" (2.5cm) 6 6" (15.2) 12 12" (30.5cm) 24 24" (61cm) 36 36" (91.4cm) 48 48" (122cm) 96 96" (243.8cm)	SN SN Satin Nickel PN Polished Nickel BZ Antique Bronze
<input type="checkbox"/>		MP MP Monorail Power Feed	4RD 4" Round Canopy	A A 12' (3.7m) Adjustable Cable	SN SN Satin Nickel PN Polished Nickel BZ Antique Bronze
<input type="checkbox"/>		MP MP Monorail Power Feed	4RD 4" Round Canopy	FE FE Feed End Wall	SN SN Satin Nickel PN Polished Nickel BZ Antique Bronze
<input type="checkbox"/>		MP MP Monorail Power Feed	4RD 4" Round Canopy	ME ME Adjustable Monorail Feed End	SN SN Satin Nickel PN Polished Nickel BZ Antique Bronze
<input type="checkbox"/>		MP MP Monorail Power Feed	2SQ 2" Square Canopy J-Box Included	1 1 1" (2.5cm)	SN SN Satin Nickel PN Polished Nickel BZ Antique Bronze
<input type="checkbox"/>		MP MP Monorail Power Feed	2SQ 2" Square Canopy J-Box Included	FE FE Feed End Wall	SN SN Satin Nickel PN Polished Nickel BZ Antique Bronze

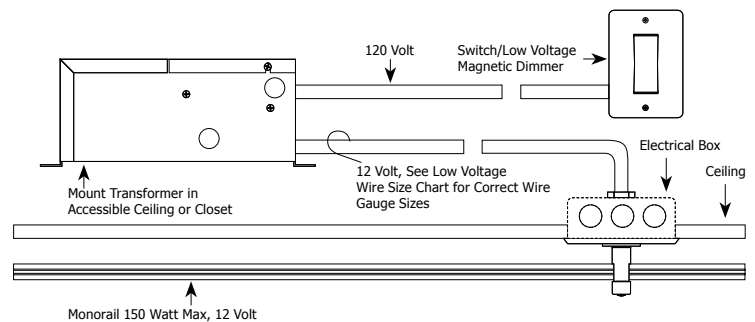

Low Voltage Feed Wire Size Chart

To determine the correct THHN wire sizes for a recommended 3% or less drop in voltage for each circuit based on the specified wattage. Lengths are the distance from the remote transformer to the system power feed connector, or power supply.

12 VOLT	5 ft.	6-15 ft.	16-20 ft.	21-40 ft.
150 watt	#12 GA	#8 GA	#6 GA	#4 GA

