

VIKING TAPES

Technical Data - VK200C

V2.0 10.07.18


Excellent for bonding glass, clear plastics and applications requiring an invisible bondline.

Product description

- Foamed Acrylic Tape
- Colour: Transparent
- Soft, tacky and conformable
- Ideal for use in glass, window and door manufacturing

Construction

- Red PE Liner
- Acrylic adhesive
- Available in log rolls or cut to specific widths

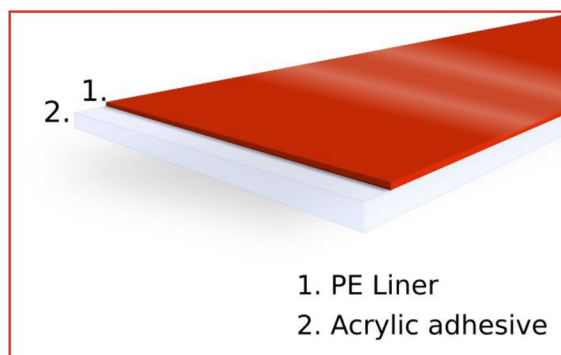

Technical data

Item	Unit		Spec.		Test method
Total thickness	mm	Inch	2.0(±0.1)	0.079(±0.004)	-
Density	kg/m ³	lb/ft ³	1000	62	-
180° Peel Strength	gf/25mm	lbf/in	3800	8.38	ASTM-D-3330
Tensile Strength <small>(T-Block Test, Aluminium, Room temp.)</small>	gf/cm ²	lbf/in ²	5000	71.11	ASTM-D-897
Dynamic Shear <small>(after 20min, Stainless steel)</small>	gf/cm ²	lbf/in ²	2500	35.56	ASTM D-1002
Dynamic Shear <small>(after 24h, Stainless steel)</small>	gf/cm ²	lbf/in ²	3500	49.78	ASTM D-1002
Temperature Resistance <small>(Short Term)</small>	°C	°F	150	302	-
Temperature Resistance <small>(Long Term)</small>	°C	°F	90	194	-
Low Temp. Resistance	°C	°F	-40	-40	-
UV Resistance	-	-	Good	-	-

Applications:

Glass industry, Point of sale, Sign Industry, Plastic fabrication