


BRICK REPLACEMENT INSTRUCTIONS

The Step-Top Model accepts the Ash Removal System, and the brick pattern incorporates the ash grate.

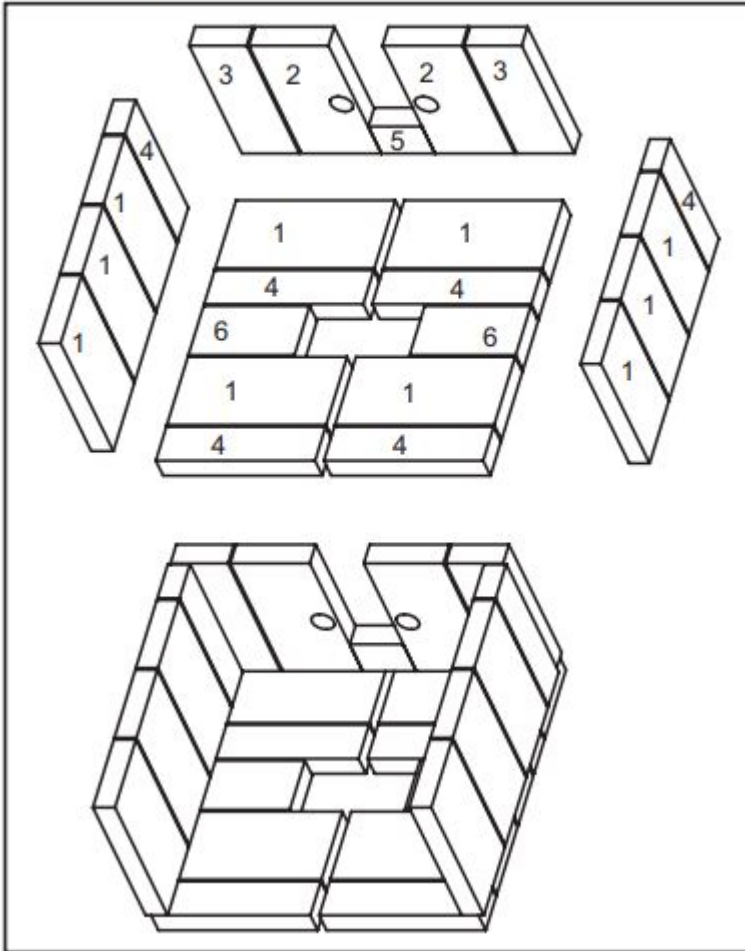

<u>Nbr</u>	<u>Brick Size</u>	<u>Qty in Set.</u>
1	9 x 4.5 x 1.25"	10
2	9 x 4.5 x 1.25" with hole	2
3	9 x 3.25 x 1.25"	2
4	9 x 2.25 x 1.25"	6
5	3 x 2.25 x 1.25"	1
6	6 x 3.25 x 1.25"	2

Use Part 832-0550 when ordering individual brick. Please provide brick dimensions or copy this page and mark the desired brick and take it to your authorized dealer.

1. After the coals have completely cooled, remove all old brick and ash from unit and vacuum firebox.
2. Remove new brick set from box and lay out to diagram shown above.
3. Lay bottom bricks in unit.
4. Install rear bricks on the top of the bottom bricks. Slide top of bricks under clip on back of firebox wall and push bottom of brick back.
5. Install side bricks. Slide top of brick under clips on side of firebox and push the bottom of the brick until it is flush with the side of the unit.