PRODUCT: SPJ-PCL-QR-1ALB WE

QUANTITY: _

WEIGHT: 286 lbs (CUSTOMER TO OFFLOAD IF OVER 6000 Lbs.)

CONCRETE COLOR:

QUAIL HILL RED FRENCH GREY
NATURAL BUNGALOW

O HARVEST


CONCRETE TEXTURE:

○ CRAFTSMANS ETCH○ STRATA

SEALER: STANDARD SEALER


GENERAL PRODUCT NOTES:

E = EXPOSED FINISHED SURFACE INSTALLATION IS REQUIRED BY OTHERS.
ALL EDGES TO BE EASED.
MANUFACTURING TOLERANCE ±1/4".




PLAN VIEW




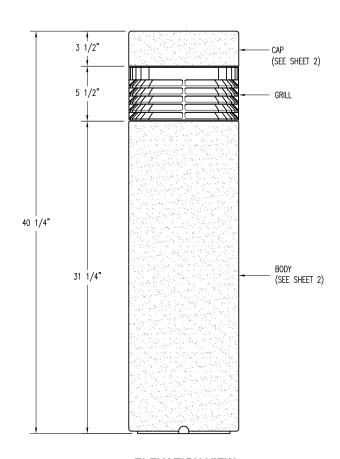


ELEVATION VIEW

SPJ LIGHTING Inc. ARCHITECTURAL LANDSCAPE & OUTDOOR LIGHTING	PLAN TYPE	CONSTRUCTION PLAN	2/6/17	070_QR_1ALB_1o3	SHEET
	PRODUCT	SPJ-PCL-QR-1ALB BOLLARD ROUND LIGHTED	SCALE 1 1/4" = 1'	DRAWN BY:	OF
	PROJECT NAME	-	PC. NO.	QC ITEM NO.	X





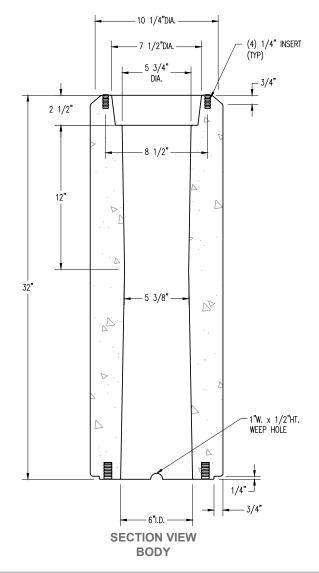

SPJ LIGHTING Inc. ARCHITECTURAL LANDSCAPE & OUTDOOR LIGHTING	PLAN TYPE	CONSTRUCTION PLAN	DATE 2/6/17	FILE NO. 070_QR_1ALB_203	SHEET
	PRODUCT	SPJ-PCL-QR-1ALB BOLLARD ROUND LIGHTED	SCALE 1 1/2" = 1'	DRAWN BY:	OF
	PROJECT NAME	-	PC. NO.	QC ITEM NO.	Χ

INSTALLATION NOTES:


- 1. CAST-IN OR CORE DRILL (4) 1-1/2"DIA. x 5"DEEP GROUT POCKETS INTO FOOTING PER ANCHOR BOLT PATTERN (SEE SHEET 2).
- 2. TAKE (4) 1/2"DIA. x 4-1/2"LONG ANCHOR BOLTS AND THREAD INTO (3) 1/2"DIA.
- THREADED INSERTS, LEAVING 3-1/2" OF THE ANCHOR BOLT EXPOSED.

1/4" X 1" TAMPER PROOF S.S. BOLT

1/2"DIA. X 4 1/2"L. BOLTS

2 3

- 3. FILL ALL GROUT POCKETS W/ NON-SHRINK GROUT. INSERT BOLLARD W/ ANCHOR BOLTS INTO GROUT POCKETS.

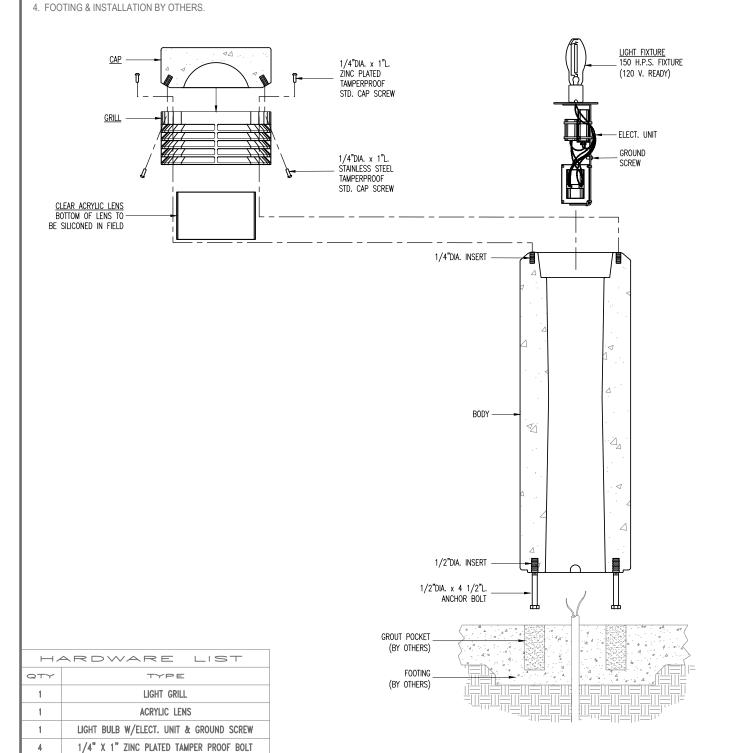

SPJ LIGHTING Inc. ARCHITECTURAL LANDSCAPE & OUTDOOR LIGHTING	PLAN TYPE	CONSTRUCTION PLAN	2/6/17	070_QR_1ALB_3o3	SHEE!
	PRODUCT	SPJ-PCL-QR-1ALB BOLLARD ROUND LIGHTED	SCALE 1 1/4" = 1'	DRAWN BY:	OF
	PROJECT NAME	-	PC. NO.	QC ITEM NO.	Χ

ELEVATION VIEW