



# INSTALLATION INSTRUCTION

v1

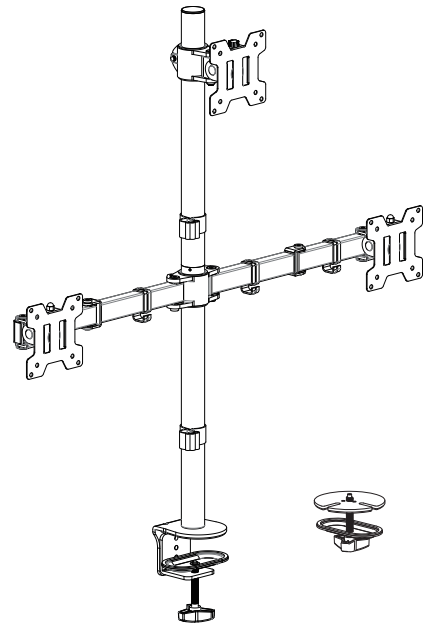

Max:  
17.6LBS  
(8KG)  
Each Monitor



DA-3L

If you have any questions, please feel free to contact Customer Service via Amazon before returning.


## Safety Caution

Please read this instruction carefully before installation.  
If you do not understand these instructions or have doubts about the safety of the installation, assembly or use of this product, please contact us.


**WARNING:** This product contains small items that could be a choking hazard if swallowed.  
KEEP AWAY FROM CHILDREN UNDER 3 YEARS OLD. ADULT SUPERVISION IS REQUIRED.

## Before Starting Assembly


When attaching brackets to the flat screen, be careful not to over tighten screws and be sure that screws do not bottom out in the mounting holes.  
Before starting assembly, verify all parts are included and undamaged. For parts shortage or damage, please contact us.




Too Short



Too Long



Correct




Correct



Do not tighten the screws excessively or your monitor might be damaged.

## Hardware Included

### Clamp Bracket



01A x1


All are included in 01A



a Clip Plate



b Knob Bolt



c Bracket



d Bolt



e Washer



f Washer

### L Plate




01B x1

### Round Plate




01C x1

### Upper Pole



02A x1



02B x1

### Head




03A x1

### Arm



03B x1

### VESA Plate



04 x3

### 2mm Allen key



05A x1

### 3mm Allen key




05B x1

### 5mm Allen key




05C x1

### Screw M8\*10mm




06 x2

### Cable Clip



07A x2

### Cable Clip



07B x4


| Monitor Kit | Philips Screws                                                                                                 | Philips Screws                                                                                                 | Safety Screw                                                                                                   | Cap Nut                                                                                                 | Spacers                                                                                                    |
|-------------|----------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------|
|             | <br>M4 x 12mm<br>x12<br>M-A | <br>M4 x 30mm<br>x12<br>M-B | <br>M5 x 12mm<br>x1<br>M-C1 | <br>M6<br>x2<br>M-C2 | <br>L10mm<br>x24<br>M-D |

## Step 1A Clamp Installation


1A-1

1A-2


1A-3

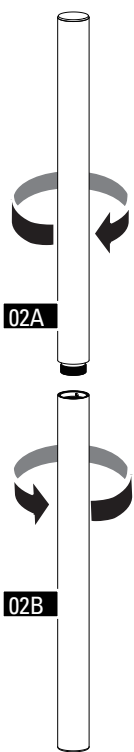

Assemble the upper pole 02A and the lower pole 02B together

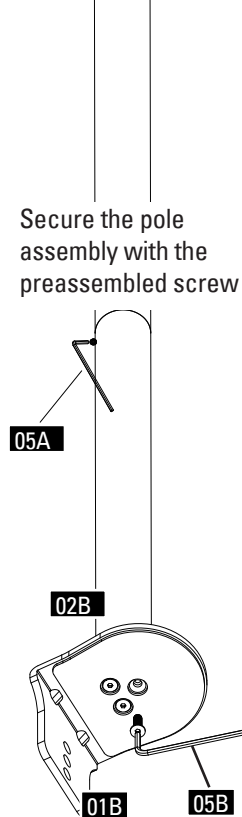

Secure the L plate 01B to the lower pole 02B with the preassembled screws.

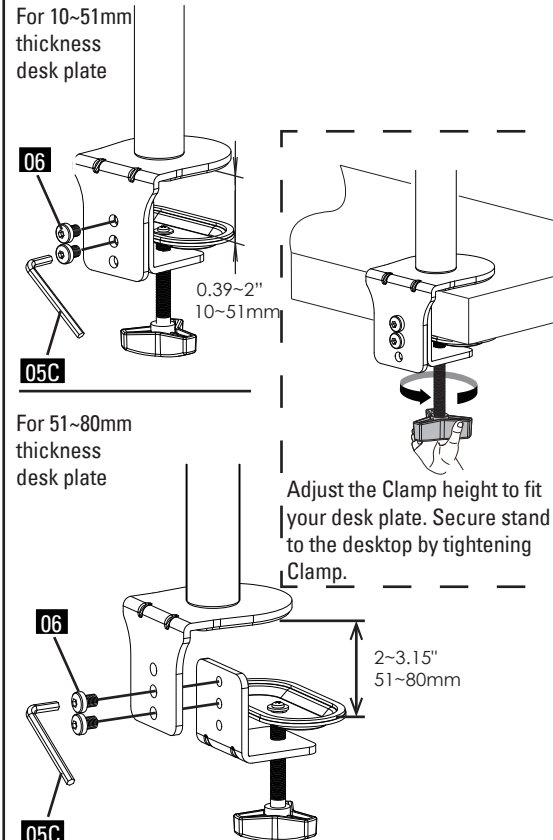

Secure the clamp bracket to the L plate with the screws 06


3

## Step 1B Grommet Base Installation


1B-1

1B-2


1B-3

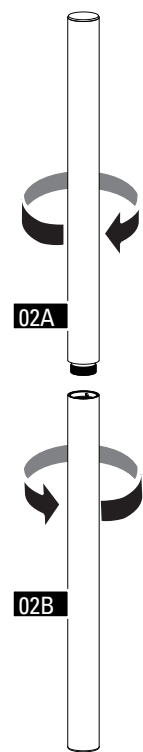


Assemble the upper pole 02A and the lower pole 02B together.

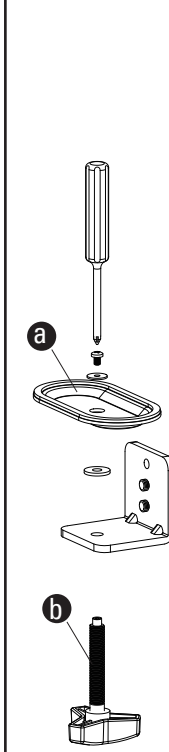

Dis-assemble the clamp bracket. the marked parts a and b will be used in next step.

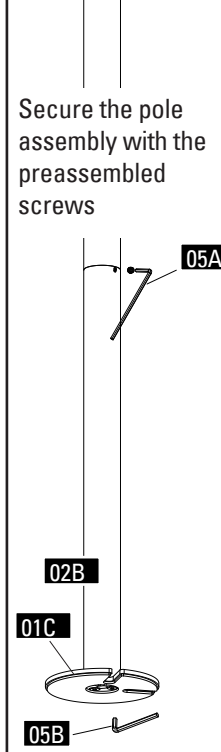

Assemble the round plate 01C to the lower pole 02B with the preassembled screws.

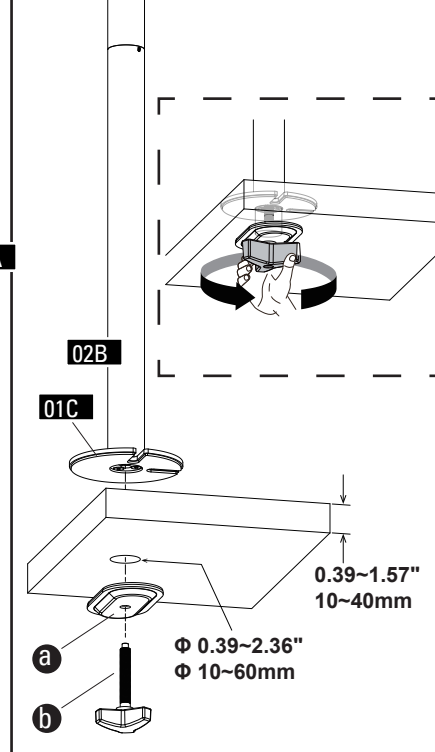


Position pole assembly on the desk then secure it by tightening the knob bolt after making knob bolt b through the Long plate a, desk hole, and the bottom of pole assembly sequentially.


4

## Step 2 Attach the VESA plates to the monitors

(a) For Flat Back

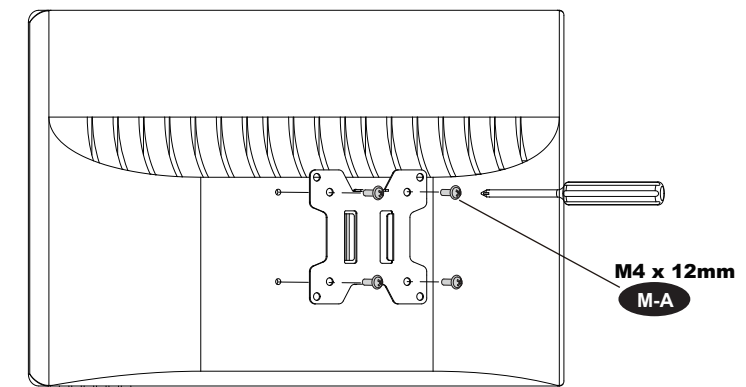

(b) For Recessed / Curved Back

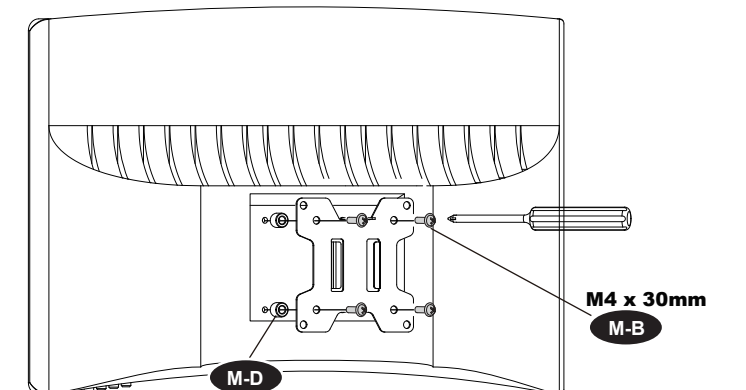

Note: use 1 piece or 2 pieces of spacers M-D

5

Step 3 Attach the monitors to the stand

3-1

▲ Bolt Heads UP!

03B

Assemble the arm 03B and the pole together.

3-2

07B

05C

07A

Slide the monitor head 03A down and tighten the bolt to secure it

Fasten the bolt with 5mm Allen key 05C. Attach the cable clips 07A and 07B to the stand.

3-3

03A

05C

3-4

Hang 2 monitors at the same time.

3mm Allen key 05B

M-C2

Hang the monitors onto the monitor arm then using the 3mm Allen key 07B to turn the screws L to adjust the monitors to the same level if necessary.

Rise the monitor

Lower the monitor

Manage tools and cables

This cable clip also can take in the Allen keys

9

Step 3 Attach the monitors to the stand

Repeat the previous step to secure the third monitor to the stand via fastening the safety screw

M-C1

Step 4 Tilting Adjustment

-30°

+30°

05C

Tighten

Loosen

05C

5mm Allen key

Loosen tilting bolts, pull monitor to your desired angle, then fasten tilting bolts with the 5mm Allen key.

7

Set the desired angle of the monitors

Desk

✗

Desk

✓

10

Step 5 Switch screen horizontally and vertically

If needed, the monitor can be rotated  $\pm 90$  degrees for switching screen between horizontally and vertically for turn the monitors directly.

360°

360° Rotation

This function works better for monitors with the center of gravity.

**Note:** To ensure stability, the tightness of the rotation axis is preset, so it need take some effort to rotate the VESA Plate.

**Suggestion:** Please attach the monitor first, then hold the two sides of it with both hands, and rotate vigorously. If that doesn't work out, please do not hesitate to ask for our help via Amazon.

8

Product dimensions

31.7" 806mm

1.5" 38mm

$\pm 90^\circ$

30" 762mm

$\pm 30^\circ$

$\pm 90^\circ$

1.54" 39mm

7.29" 185mm

6.18" 157mm

$\pm 90^\circ$

$\pm 90^\circ$

2.95" 75mm

3.94" 100mm

$\pm 90^\circ$

0.39~3.15" 10~80mm

11