



Test Report: HLG-120H-54

120W Single Output Switching Power Supply

■ DESIGN VERIFY TEST

Output Function Test

Input Function Test

Protection Function Test

Other Test

Component Stress Test

■ SAFETY & E.M.C. TEST

Safety Test

E.M.C. Test

■ RELIABILITY TEST

DESIGN VERIFY TEST

OUTPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	RIPPLE & NOISE	V1: 200 mVp-p (Max)	I/P: 230 VAC O/P: FULL LOAD Ta: 25°C	V1: 132 mVp-p (Max)
2	OUTPUT VOLTAGE ADJUST RANGE	CH1: 49V-58 V	I/P: 230 VAC I/P: 115VAC O/P: MIN LOAD Ta: 25°C	47.31 V - 60.15 V / 230VAC 47.31 V - 60.15 V / 115VAC
3	CURRENT ADJ RANGE	1.1A-2.3A	I/P: 230 VAC O/P: FULL LOAD Ta: 25°C	0.963 A - 2.714 A
4	CONSTANT CURRENT REGION	27V-54V	I/P: 230 VAC O/P: CV MODE Ta: 25°C	O/P=27V: 2.394 A O/P=54V: 2.392 A
5	OUTPUT VOLTAGE TOLERANCE	V1: -1% ~ 1% (Max)	I/P: 100 VAC / 305VAC O/P: FULL / 0% LOAD Ta: 25°C	V1: 0.02% ~ 0.02%
6	LINE REGULATION	V1: -0.5% ~ 0.5% (Max)	I/P: 100 VAC ~ 305 VAC O/P: FULL LOAD Ta: 25°C	V1: 0.02% ~ 0.02%
7	LOAD REGULATION	V1: -0.5% ~ 0.5% (Max)	I/P: 230 VAC O/P: FULL - MIN LOAD Ta: 25°C	V1: 0% ~ 0%
8	SET UP TIME	230VAC/ 500 ms (Max) 115VAC/ 1200 ms (Max)	I/P: 230 VAC I/P: 115 VAC O/P: FULL LOAD Ta: 25°C	230VAC/ 394 ms 115 VAC/ 824 ms
9	RISE TIME	230VAC/ 50 ms (Max) 115VAC/ 50 ms (Max)	I/P: 230 VAC I/P: 115 VAC O/P: FULL LOAD Ta: 25°C	230VAC/ 12 ms 115 VAC/ 12 ms
10	HOLD UP TIME	230VAC/ 12 ms (Typ) 115VAC/ 12 ms (Typ)	I/P: 230 VAC I/P: 115 VAC O/P: FULL LOAD Ta: 25°C	230VAC/ 25 ms 115 VAC/ 25 ms
11	OVER/UNDERSHOOT TEST	< ±5%	I/P: 230 VAC O/P: FULL LOAD Ta: 25°C	TEST: < 5%
12	DYNAMIC LOAD	V1: 5400 mVp-p	I/P: 230 VAC O/P: (1) FULL / Min LOAD 90% DUTY / 1KHZ (2) FULL / Min LOAD 90% DUTY / 120HZ Ta: 25°C	298 mVp-p 1750 mVp-p

13	DIMMER TEST (B Type only)	SPEC:											
		*Reference resistance value for output current adjustment (Typical)											
		Resistance value	10K	20K	30K	40K	50K	60K	70K	80K	90K	100K	
		Output current	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	
		*1 ~ 10V dimming function for output current adjustment (Typical)											
		Dimming value	1V	2V	3V	4V	5V	6V	7V	8V	9V	10V	
		Output current	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	
		*10V PWM signal for output current adjustment (Typical)											
		Duty value	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	
		Output current	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	
		TEST RESULT: I/P : 230 VAC ; Ta : 25°C											
		1	Resistance value	10K	20K	30K	40K	50K	60K	70K	80K	90K	100K
			Output current	0.199A	0.435A	0.675A	0.902A	1.142A	1.379A	1.605A	1.818A	2.087A	2.331A
%	8.65%		18.91%	29.35%	39.22%	49.65%	59.96%	69.78%	79.04%	90.74%	101.35%		
2	Dimming value	1V	2V	3V	4V	5V	6V	7V	8V	9V	10V		
	Output current	0.199A	0.432A	0.667A	0.900A	1.136A	1.369A	1.603A	1.807A	2.071A	2.303A		
	%	8.65%	18.78%	29.00%	39.13%	49.39%	59.52%	69.70%	78.57%	90.04%	100.13%		
3	Duty value	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%		
	Output current	0.218A	0.452A	0.686A	0.921A	1.155A	1.390A	1.625A	1.860A	2.095A	2.328A		
	%	9.48%	19.65%	29.83%	40.04%	50.22%	60.43%	70.65%	80.87%	91.09%	101.22%		

INPUT FUNCTION TEST

NO	TEST ITEM	SPECICATION	TEST CONDITION	RESULT
1	INPUT VOLTAGE RANGE	90VAC~305 VAC	I/P:TESTING O/P:FULL LOAD Ta:25°C	80 V~305V
			I/P: (1)LOW-LINE-3V=87 V (2)HIGH-LINE=305 V O/P:FULL/MIN LOAD ON: 30 Sec . OFF: 30 Sec 10MIN (AC POWER ON/OFF NO DAMAGE)	TEST: OK
2	INPUT FREQUENCY RANGE	47HZ ~63 HZ NO DAMAGE	I/P: 100 VAC ~305VAC O/P:FULL-MIN LOAD Ta:25°C	OK
3	POWER FACTOR	0.95/ 230 VAC FULL LOAD (TYP) 0.98/ 115 VAC FULL LOAD (TYP) 0.93/ 277 VAC FULL LOAD (TYP)	I/P: 230 VAC I/P: 115 VAC I/P: 277 VAC O/P:FULL LOAD Ta:25°C	PF=0.9627/230V/100%LOAD PF=0.9946 /115V/100%LOAD PF=. /277V/100%LOAD
4	EFFICIENCY	93.5% (TYP)	I/P: 230 VAC O/P:FULL LOAD Ta:25°C	93.681 %
5	INPUT CURRENT	277V/ 0.55 A 230 V/ 0.6 A 115 V/ 1.4 A	I/P: 277 VAC I/P: 230 VAC I/P: 115 VAC O/P:FULL LOAD Ta:25°C	I =0.493 A/ 277VAC I =0.5789 A/ 230VAC I =1.1586 A/ 115VAC
6	INRUSH CURRENT	230 V/ 60A (Typ) COLD START	I/P: 230 VAC O/P:FULL LOAD Ta:25°C	I = 48 A/ 230VAC
7	TOTAL HARMONIC DISTORTION	THD< 20% when output loading \geq 50% at 115VAC/230VAC input and output loading \geq 75% at 277VAC input	I/P : 115 VAC I/P : 230 VAC O/P : 50% LOAD I/P : 277 VAC O/P : 75%LOAD Ta : 25°C	THD : 10.06 /115VAC THD : 16.82 /230VAC THD : 15.02 /277VAC

PROTECTION FUNCTION TEST

NO	TEST ITEM	SPECICATION	TEST CONDITION	RESULT
1	OVER LOAD PROTECTION	95 %-108 %	I/P: 305VAC I/P: 230 VAC I/P: 100 VAC O/P:TESTING Ta:25°C	103.95 %/305VAC 103.95 %/ 230VAC 103.95 %//100VAC Constant current limiting, recovers automatically after fault condition is removed
2	OVER VOLTAGE PROTECTION	V1: 59V~65V	I/P: 305VAC I/P: 230 VAC I/P: 90 VAC O/P:MIN LOAD Ta:25°C	61.29 V/ 305VAC 61.31 V/ 230VAC 61.31 V/ 100VAC Shut down o/p voltage with auto recovery or re-power on to recovery

3	OVER TEMPERATURE PROTECTION	NO DAMAGE	I/P: 230 VAC O/P: FULL LOAD	O.T.P. Active Shut down o/p voltage with auto recovery or re-power on to recovery
4	SHORT PROTECTION	SHORT EVERY OUTPUT 1 HOUR NO DAMAGE	I/P: 305VAC O/P: FULL LOAD Ta:25°C	NO DAMAGE Hiccup Mode

COMPONENT STRESS TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	Power Transistor (D to S) or (C to E) Peak Voltage	Q5 Rated 12A/500V	I/P : High-Line +3V = 308V O/P : (1)Full Load Turn on (2) Output Short (3)Full load continue Ta : 25°C	(1) 478 V (2) 468 V (3) 456 V
2	Diode Peak Voltage	Q101 Rated 30A/150V	I/P : High-Line +3V =308V O/P : (1)Full Load Turn on (2)Output Short (3)Full load continue Ta : 25°C	(1) 126 V (2) 119 V (3) 120 V
		Q102 Rated 30A/150V	I/P : High-Line +3V = 308 V O/P : (1)Full Load Turn on (2)Output Short (3)Full load continue Ta : 25°C	(1) 118 V (2) 118 V (3) 117 V
3	Input Capacitor Voltage	C5 Rated: 82u/450V	I/P : High-Line +3V = 308V O/P : (1)Full Load Turn on /Off (2) Min load Turn on /Off (3)Full Load /Min load Change Ta : 25°C	(1) 434.7 V (2) 435.6 V (3) 435.7 V
4	Control IC Voltage Test	U 900 Rated 8.85V~16V	I/P : High-Line +3V = 308V O/P : (1)Full Load Turn on /Off (2) Min load Turn on /Off (3)Full Load /Min load Change Ta : 25°C	(1) 13 V (2) 12.9 V (3) 13 V
5	P.F.C Transistor (D to S) or (C to E) Peak Voltage	Q1 Rated 17A/600V	I/P : High-Line +3V = 308 V O/P : (1)Full Load Turn on (2)Output Short (3)Full load continue Ta : 25°C	(1) 490 V (2) 466 V (3) 466 V

SAFETY & EMC TEST

SAFETY TEST

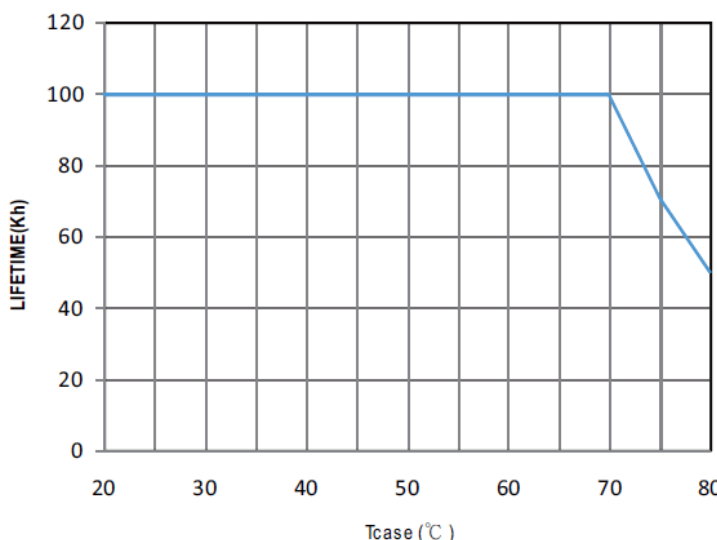
NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	WITHSTAND VOLTAGE	IEC60950-1 I/P-O/P: 3.75KVAC/min I/P-FG:2KVAC/min<4.5mA O/P-FG:1.5KVAC/min	I/P-O/P: 4 KVAC/min I/P-FG: 2.4KVAC/min O/P-FG: 1.8KVAC/min Ta:25°C	I/P-O/P: 2.627 mA I/P-FG: 2.34 mA O/P-FG: 3.64 mA NO DAMAGE
2	ISOLATION RESISTANCE	I/P-O/P:500VDC>100MΩ I/P-FG: 500VDC>100MΩ O/P-FG:500VDC>100MΩ	I/P-O/P: 500 VDC I/P-FG: 500 VDC O/P-FG: 500 VDC Ta:25°C	I/P-O/P: 30 GΩ I/P-FG: 25.2 GΩ O/P-FG: 30 GΩ NO DAMAGE
3	GROUNDING CONTINUITY	IEC60950-1 FG(PE) TO CHASSIS OR TRACE < 100 mΩ	40A / 2min Ta:25°C	11 mΩ
4	LEAKAGE CURRENT	IEC60950-1 < 0.75 mA / 240VAC	I/P: 240 VAC O/P:Min LOAD Ta:25°C	L-FG: 0.245 mA N-FG: 0.24 mA
5	APPROVAL	TUV: Certificate NO : E334940 UL: File NO : R50185176		

E.M.C TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	HARMONIC	EN61000-3-2 CLASS A CLASS C	I/P: 230VAC/50HZ LOAD:LED/ELECTRONIC LOAD O/P:100%/50% LOAD Ta:25°C	PASS
2	CONDUCTION	EN55022 EN55015 CLASS B	I/P: 230 VAC (50HZ) O/P:FULL/50% LOAD Ta:25°C	PASS Test by certified Lab
3	RADIATION	EN55022 EN55015 CLASS B	I/P: 230 VAC (50HZ) O/P:FULL LOAD Ta:25°C	PASS Test by certified Lab
4	E.S.D	EN61000-4-2 INDUSTRY AIR:8KV / Contact:4KV	I/P: 230 VAC/50HZ O/P:FULL LOAD Ta:25°C	CRITERIA A
5	E.F.T	EN61000-4-4 INDUSTRY INPUT: 2KV	I/P: 230 VAC/50HZ O/P:FULL LOAD Ta:25°C	CRITERIA A
6	SURGE	IEC61000-4-5 INDUSTRY L-N :2KV L,N-PE:4KV	I/P: 230 VAC/50HZ O/P:FULL LOAD Ta:25°C	CRITERIA A

Reliability Test

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT																																																																
1	TEMPERATURE RISE TEST	MODEL : HLG-120H-24 1. ROOM AMBIENT BURN-IN : 2.5 HRS I/P : 230VAC O/P : FULL LOAD Ta= 27.6 °C 2. HIGH AMBIENT BURN-IN : 5.5HRS I/P : 230VAC O/P : FULL LOAD Ta= 54.8 °C	<table border="1"> <thead> <tr> <th>NO</th> <th>Position</th> <th>ROOM AMBIENT Ta= 27.6 °C</th> <th>HIGH AMBIENT Ta= 54.8 °C</th> </tr> </thead> <tbody> <tr><td>1</td><td>BD1</td><td>50.1°C</td><td>70.3°C</td></tr> <tr><td>2</td><td>Q1</td><td>51.2°C</td><td>71.2°C</td></tr> <tr><td>3</td><td>L2</td><td>52.2°C</td><td>72.0°C</td></tr> <tr><td>4</td><td>Q5</td><td>51.7°C</td><td>71.6°C</td></tr> <tr><td>5</td><td>D2</td><td>52.6°C</td><td>72.3°C</td></tr> <tr><td>6</td><td>RTH2</td><td>49.6°C</td><td>69.6°C</td></tr> <tr><td>7</td><td>C5</td><td>49.0°C</td><td>68.8°C</td></tr> <tr><td>8</td><td>T1</td><td>54.2°C</td><td>73.4°C</td></tr> <tr><td>9</td><td>Q101</td><td>51.1°C</td><td>71.1°C</td></tr> <tr><td>10</td><td>D9</td><td>50.4°C</td><td>70.4°C</td></tr> <tr><td>11</td><td>C102</td><td>48.3°C</td><td>68.5°C</td></tr> <tr><td>12</td><td>C201</td><td>49.9°C</td><td>69.9°C</td></tr> <tr><td>13</td><td>C38</td><td>51.6°C</td><td>71.5°C</td></tr> <tr><td>14</td><td>U900</td><td>50.1°C</td><td>70.3°C</td></tr> <tr><td>15</td><td>U1</td><td>51.6°C</td><td>71.9°C</td></tr> </tbody> </table>	NO	Position	ROOM AMBIENT Ta= 27.6 °C	HIGH AMBIENT Ta= 54.8 °C	1	BD1	50.1°C	70.3°C	2	Q1	51.2°C	71.2°C	3	L2	52.2°C	72.0°C	4	Q5	51.7°C	71.6°C	5	D2	52.6°C	72.3°C	6	RTH2	49.6°C	69.6°C	7	C5	49.0°C	68.8°C	8	T1	54.2°C	73.4°C	9	Q101	51.1°C	71.1°C	10	D9	50.4°C	70.4°C	11	C102	48.3°C	68.5°C	12	C201	49.9°C	69.9°C	13	C38	51.6°C	71.5°C	14	U900	50.1°C	70.3°C	15	U1	51.6°C	71.9°C	
NO	Position	ROOM AMBIENT Ta= 27.6 °C	HIGH AMBIENT Ta= 54.8 °C																																																																	
1	BD1	50.1°C	70.3°C																																																																	
2	Q1	51.2°C	71.2°C																																																																	
3	L2	52.2°C	72.0°C																																																																	
4	Q5	51.7°C	71.6°C																																																																	
5	D2	52.6°C	72.3°C																																																																	
6	RTH2	49.6°C	69.6°C																																																																	
7	C5	49.0°C	68.8°C																																																																	
8	T1	54.2°C	73.4°C																																																																	
9	Q101	51.1°C	71.1°C																																																																	
10	D9	50.4°C	70.4°C																																																																	
11	C102	48.3°C	68.5°C																																																																	
12	C201	49.9°C	69.9°C																																																																	
13	C38	51.6°C	71.5°C																																																																	
14	U900	50.1°C	70.3°C																																																																	
15	U1	51.6°C	71.9°C																																																																	
2	OVER LOAD BURN-IN TEST	NO DAMAGE 1 HOUR (MIN)	I/P : 305 VAC O/P : O/P SHORT TEST Ta = 25°C	TEST : OK																																																																
3	LOW TEMPERATURE TURN ON TEST	TURN ON AFTER 2 HOUR	I/P : 305VAC/230 VAC/100VAC O/P : 95% LOAD Ta= -40 °C	TEST : OK																																																																
4	HIGH HUMIDITY HIGH TEMPERATURE HIGH VOLTAGE TURN ON TEST	AFTER 12 HOURS IN CHAMBER ON CONTROL 60 °C NO DAMAGE	I/P : 305 VAC O/P : 95% Ta= 60 °C HUMIDITY= 95 %R.H	TEST : OK																																																																
5	TEMPERATURE COEFFICIENT	± 0.03 %(0-60°C)	I/P : 230 VAC O/P : FULL LOAD	± 0.002 %(0-50°C)																																																																
6	STORAGE TEMPERATURE TEST	1. Thermal shock Temperature : -45°C~ +90°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 5 CYCLE 5. Input/Output condition : STATIC		OK																																																																
7	THERMAL SHOCK TEST	1. Thermal shock Temperature : -35°C~ +65°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 10 CYCLE 5. Input/Output condition : 230VAC/Full Load TURN ON/58 'SEC.;TURN OFF/2SEC.		OK																																																																

8	VIBRATION TEST	1 Carton & 1 Set (1) Waveform : Sine Wave (2) Frequency : 10-500Hz (3) Sweep Time : 12min/sweep cycle (4) Acceleration : 5G (5) Test Time : 72min in each axis (X.Y.Z) (6) Ta : 25°C	TEST : OK																		
9	CAPACITOR LIFE CYCLE	HLG-120H-24:SUPPOSE C102 IS THE MOST CRITICAL COMPONENT (1) I/P : 230VAC O/P : FULL LOAD Ta= 25 °C LIFE TIME (2) I/P : 230VAC O/P : FULL LOAD Ta= 60 °C LIFE TIME (3) I/P : 230VAC O/P : 75% LOAD Ta= 60 °C LIFE TIME (4) I/P : 230VAC O/P : 50% LOAD Ta= 60 °C LIFE TIME	(1) 17812245HRS (2) 141081 HRS (3) 17812245 HRS (4) 17812245 HRS																		
10	MTBF	Conducted by Parts Stress Analysis Prediction 192.2K hrs min. MIL-HDBK-217F (25°C)	OK																		
11	DMTBF/Accelerated Life Test	Demonstration Mean Time Between Failure(Expected Life) : 62,000 hours @ Tcase 70°C  <table border="1"> <caption>Graph Data: Lifetime (Kh) vs Tcase (°C)</caption> <thead> <tr> <th>Tcase (°C)</th> <th>Lifetime (Kh)</th> </tr> </thead> <tbody> <tr><td>20</td><td>100</td></tr> <tr><td>30</td><td>100</td></tr> <tr><td>40</td><td>100</td></tr> <tr><td>50</td><td>100</td></tr> <tr><td>60</td><td>100</td></tr> <tr><td>70</td><td>100</td></tr> <tr><td>75</td><td>70</td></tr> <tr><td>80</td><td>50</td></tr> </tbody> </table>	Tcase (°C)	Lifetime (Kh)	20	100	30	100	40	100	50	100	60	100	70	100	75	70	80	50	OK
Tcase (°C)	Lifetime (Kh)																				
20	100																				
30	100																				
40	100																				
50	100																				
60	100																				
70	100																				
75	70																				
80	50																				

SAMPLE	TEST RESULT	TESTER	APPROVAL
PRODUCT SAMPLE	PASS	SANFORD SU	VINCENT TSENG

2003/12/12 A50-F023