

FP20401B-3-2.5 Preselector, 2.5 MHz bandwidth, compact, BNC connectors, 155-174 MHz

- Suitable for most standard multicoupling requirements
- Can be mounted directly on 1.75 " high receiver multicoupler tray
- Covers the 155-174 MHz frequency range

The 'FP' series preselector filters are compact units that are suitable for most standard receiver multicoupling requirements. Their size permits them to be mounted directly on the 1-3/4 in (44.5 mm) high receiver multicoupler trays.



www.sinctech.com

Region	United States	Europe, Middle East and Africa	Caribbean and Latin America	Canada and rest of the world
<b>Telephone</b>	USA: 1 800 263 3275	International: +44 (0) 1487 84 28 19	International: +1 905 726 7676	Canada: 1 800 263 3275 International: +1 905 727 0165
<b>E-mail</b>	salesusa@sinctech.com	salesuk@sinctech.com	salesla@sinctech.com	salescan@sinctech.com

### Electrical Specifications


Frequency Range	MHz	155 to 174
Input VSWR (max)		1.5:1
Average Power Input (max)	W	20
Input Connectors		BNC-Female
Output Connectors		BNC-Female
Bandwidth at specified insertion loss	MHz	2.5
Insertion Loss (max) Tx to Ant	dB	1.5

### Mechanical Specifications

Width	in (mm)	4.2 (107)
Depth	in (mm)	4.9 (124)
Length/ Height	in (mm)	1.3 (33)
Weight	lbs (kg)	1.1 (0.5)
Actual Shipping weight	lbs (kg)	2 (0.91)
Shipping dimensions	in (mm)	13x9x3 (330x229x76)

### Environmental Specifications

Temperature range	°F (°C)	-22 to +140 (-30 to +60)
-------------------	---------	--------------------------

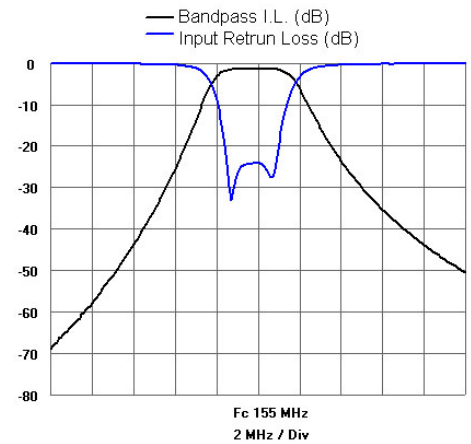

Region	United States	Europe, Middle East and Africa	Caribbean and Latin America	Canada and rest of the world
<b>Telephone</b>	USA: 1 800 263 3275	International: +44 (0) 1487 84 28 19	International: +1 905 726 7676	Canada: 1 800 263 3275 International: +1 905 727 0165
<b>E-mail</b>	salesusa@sinclaire.com	salesuk@sinclaire.com	salesla@sinclaire.com	salescan@sinclaire.com