

## 24"NAVAJO GIRL

(Fits 24" Tom Sawyer Shoulder Plate, 24" Blythe Short Arms, 24" Toddler Bent R-and Straight-L Legs)

### READ ALL INSTRUCTIONS BEFORE CUTTING FABRIC

#### AND NOTIONS:

- ✂ A! seams are 1/4" unless otherwise indicated.
- ✂ Finish all seams with a serge or zigzag.
- ✂ WRST With Right Sides Together.
- ✂ We used multi-colored cords and beads to make the belt.

#### FABRIC & NOTIONS

- 2 1/2 yd. of cotton fabric for skirt
- 7 1/2 yd. of Rick Rack for skirt
- 3 3/4 yd of 1" wide ribbon for skirt
- 1/2 yd of 1/4" wide elastic
- 1 yd. of crushed velvet for blouse
- 2 small buttons for blouse

#### SKIRT CONSTRUCTION:

1. WRST sew the lower tier together forming one large circle. Sew two rows of gathering stitches across the upper edge of the lower tier. Surge the lower edge of the tier. Turn under and stitch hem in place.
2. WRST sew the upper tier together forming one large circle. Turn under the upper edge forming a casing. Stitch the casing leaving an opening for inserting the elastic. Insert the elastic, lapping ends machine stitch. Machine stitch the opening closed.
3. Pull the gathering threads on the lower tier to fit the upper tier. WRST, sew the lower tier to the upper tier. Finish edges.
4. On the hem of the lower tier sew the Rick Rack .
5. On the lower edge of the upper tier sew the 1" wide ribbon.

## PATTERN NUMBER DA 1516 BODY PATTERN DA 1124

MOLD AVAILABLE FROM:

THE  
DOLL INC  
ARTWORKS

37104 HWY CC  
LATHAM, MO 65050  
TEL. 660-458-6285  
ORDERS ONLY  
800-886-3655



www.dollartworks.com

#### BLOUSE CONSTRUCTION:

6. WRST, sew the collar together on the outside edge. Clip curves, turn and press.
7. Baste neck edge of collar together.
8. Sew collar to yoke. See dots on yoke for collar placement. Clip and press seam.
9. Run two rows of gathering stitches on top edge of front of blouse, as indicated on pattern.
10. Pull up threads to fit on the yoke. WRST, sew in place.
11. On the yoke lining bottom edge put a 1/4" hem.
12. WRST, pin yoke lining to yoke collar seam line.
13. Sew up center front yoke, around neckline and down other side of center front yoke. Turn and press.
14. Bring hemmed edge of yoke lining to the front and sew to seam. On the back you will tack to armhole seam.
15. Run two rows of gathering stitches along sleeve cap.
16. WRST, pin sleeve to armhole, pulling up threads so that sleeve fits in to armhole. Sew in place.
17. WRST, sew sleeve and side seam, starting at dot on sleeve.
18. Press seam open, Tack at bottom edge of sleeve.
19. Run two rows of gathering stitches along bottom edge of sleeve.





20. Turn down one long edge of the cuff 1/4" and press. Fold cuff on fold line, stitch side seams of cuff. Turn cuff right side out and press.
21. Pin unfolded edge of cuff to bottom edge of sleeve, pulling up thread to fit cuff. Press seam towards cuff. Slip stitch folded edge in place.
22. Edge stitch cuff along seam line.
23. Make a buttonhole and sew buttons on cuff.
24. Turn bottom of blouse up 1/4" and press. Topstitch in place.


#### THIS PATTERN CONTAINS 8 PIECES:

- A- BLOUSE FRONT**
- B- BLOUSE BACK**
- C- SLEEVE**
- D- COLLAR**
- E- CUFF**
- F- YOKE LINING**
- G- SKIRT UPPER TIER**
- H- SKIRT LOWER TIER**

**G**  
**DA 1516**  
**24" NAVAJO GIRL**  
**SKIRT UPPER TIER**  
**CUT 3**  
**6 1/2" X 45"**  
**2000**

**H**  
**DA 1516**  
**24" NAVAJO GIRL**  
**SKIRT LOWER TIER**  
**CUT 6**  
**7 1/2" X 45"**  
**2000**

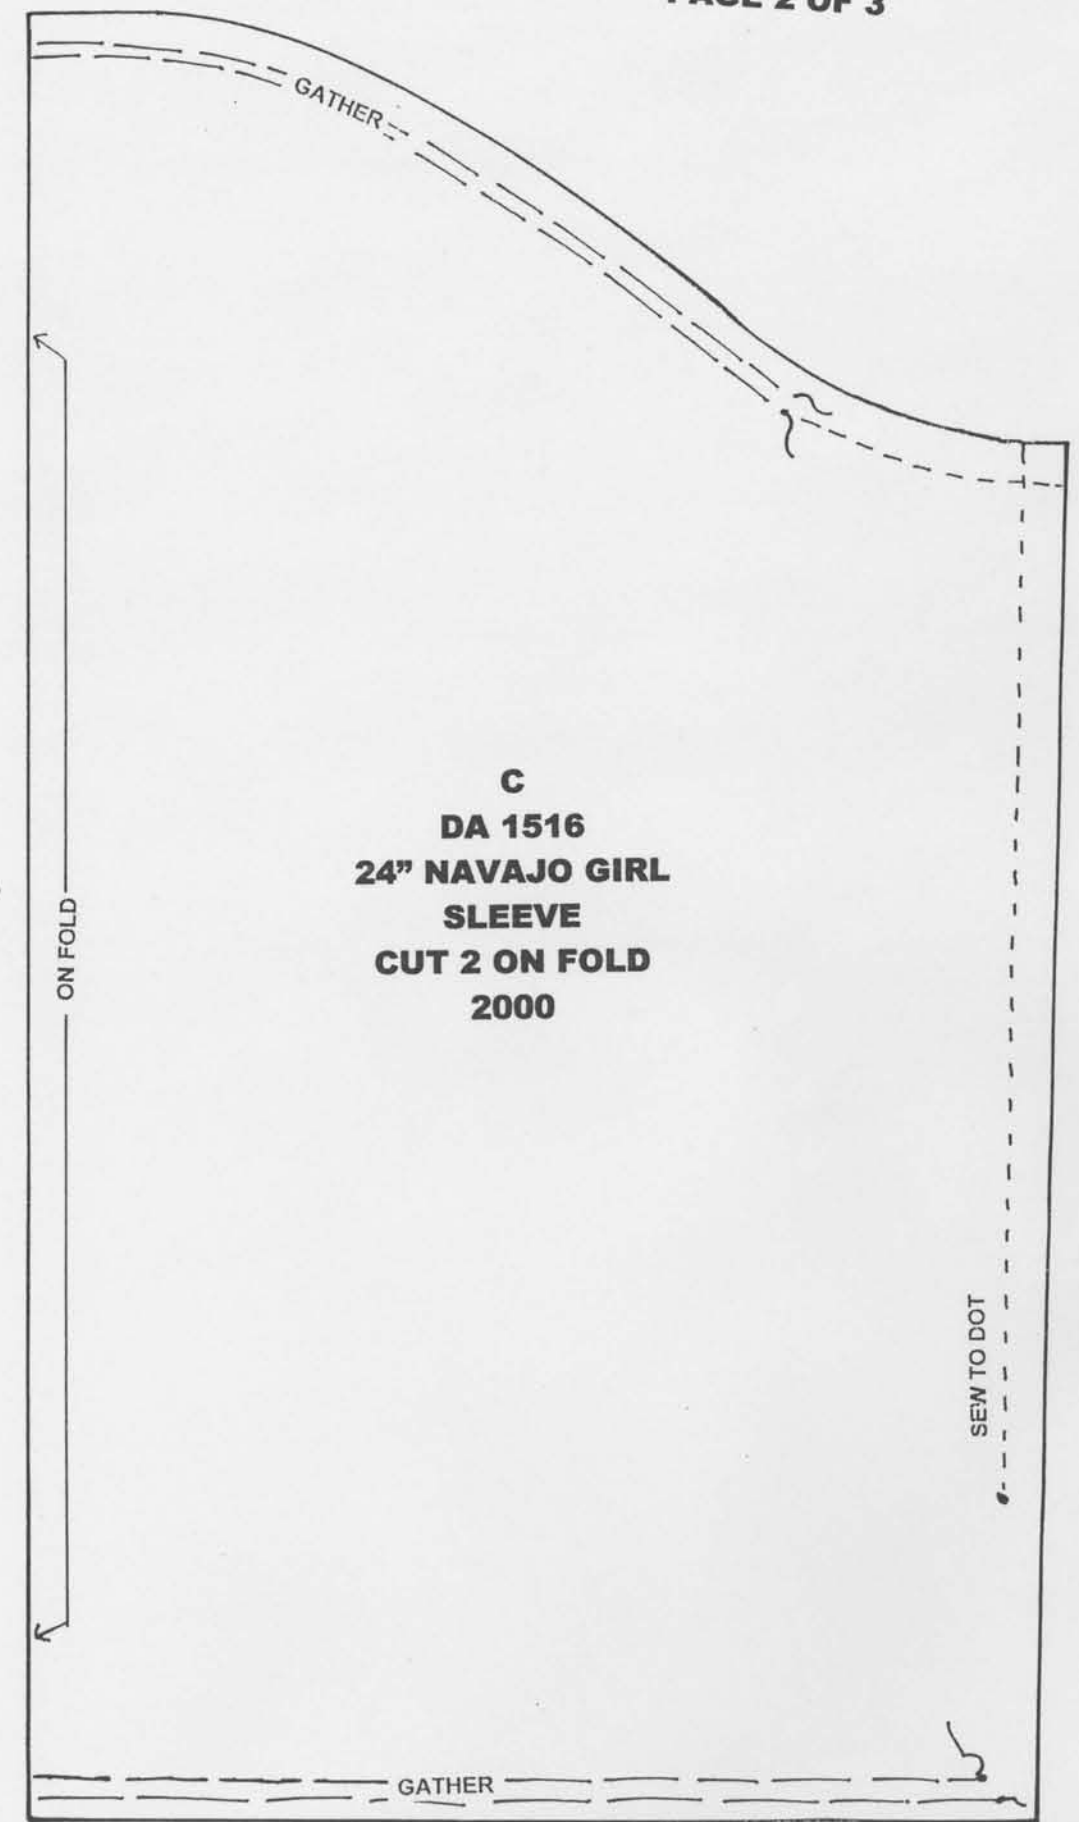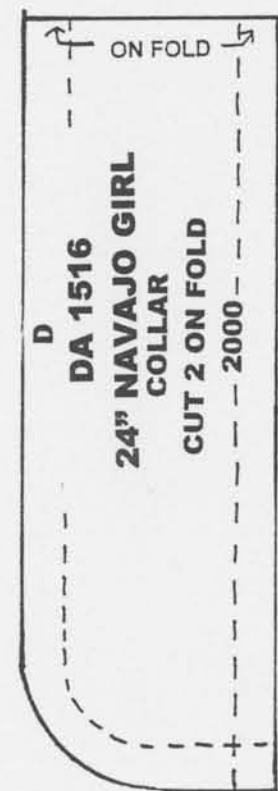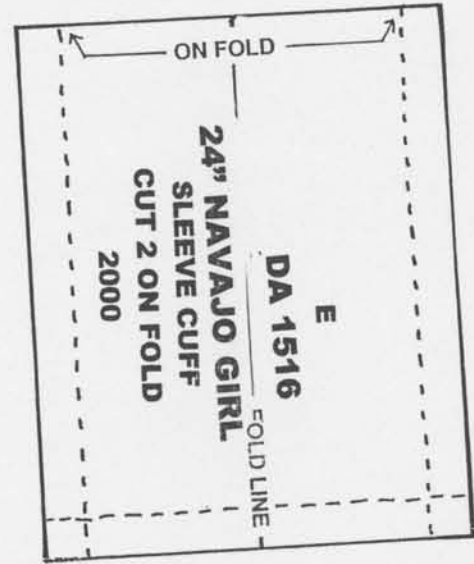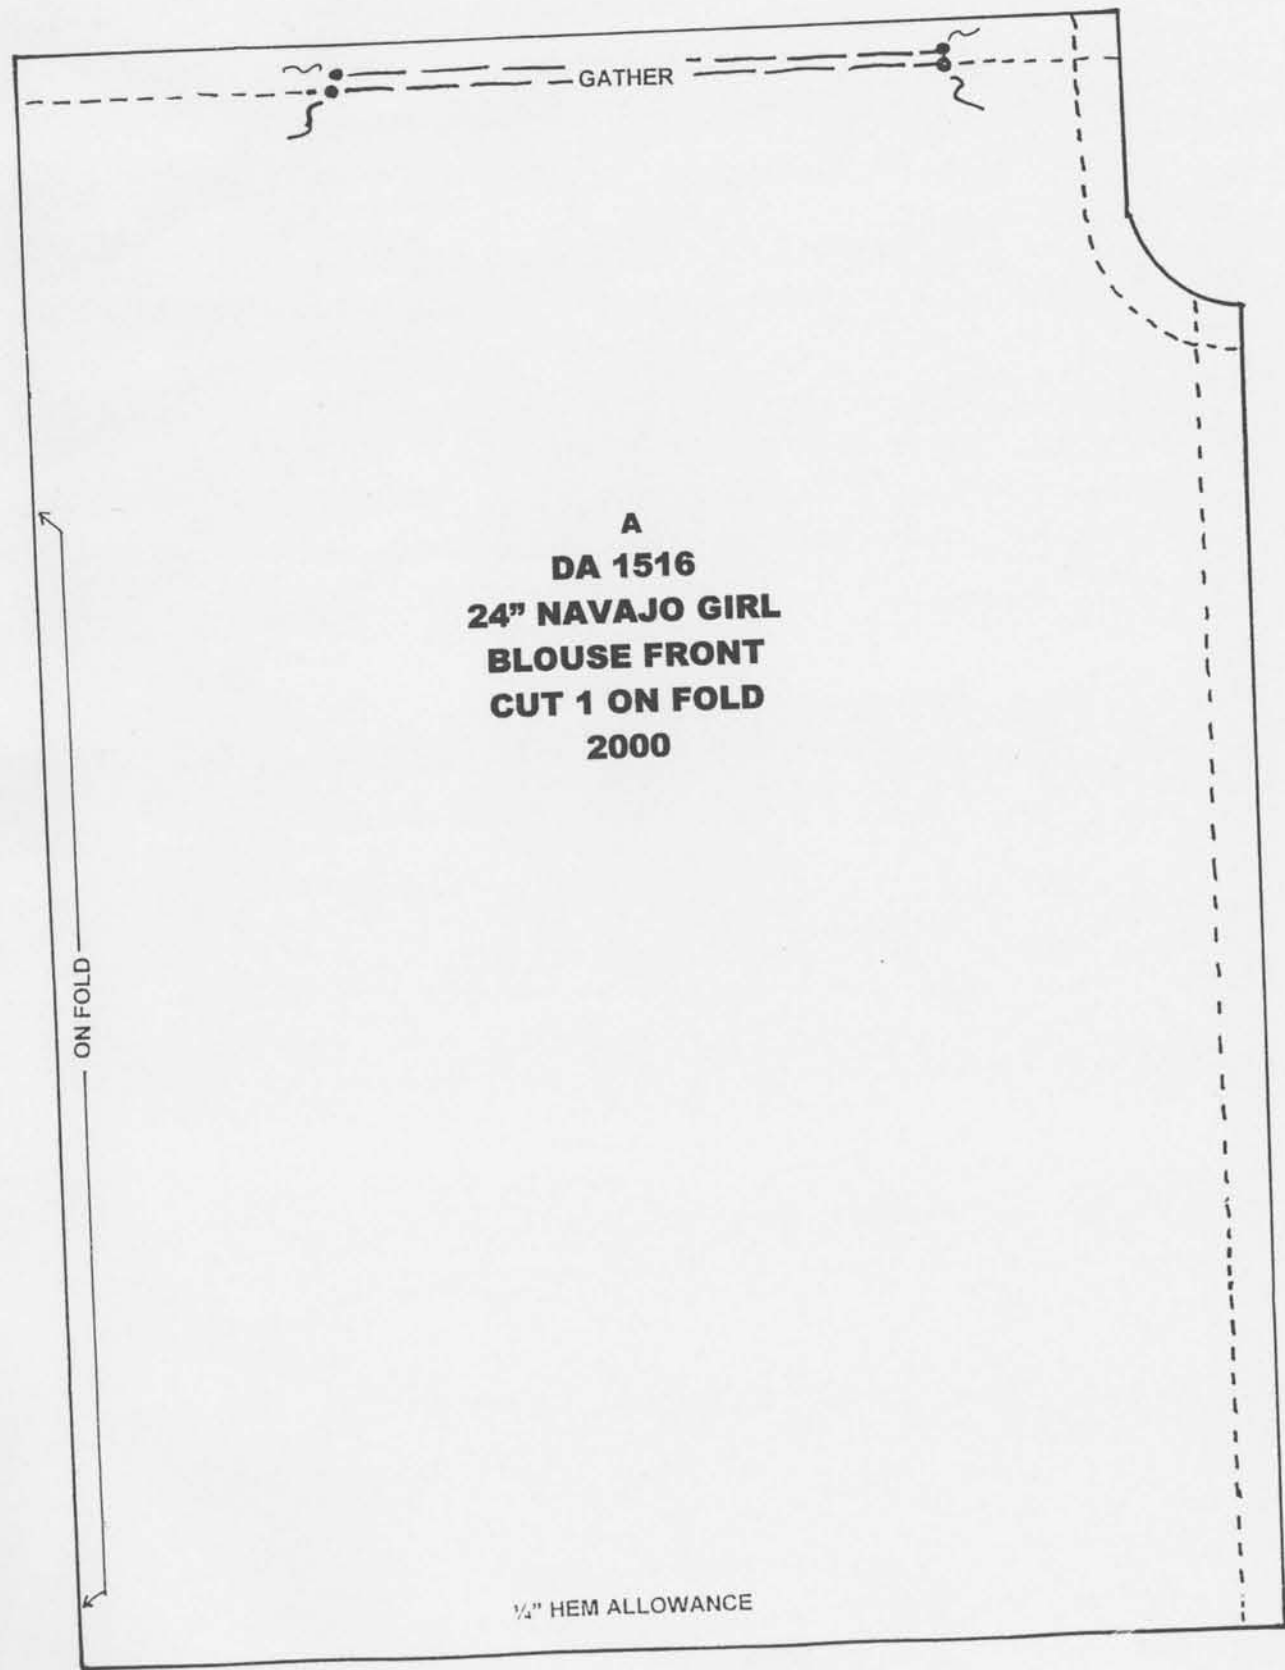


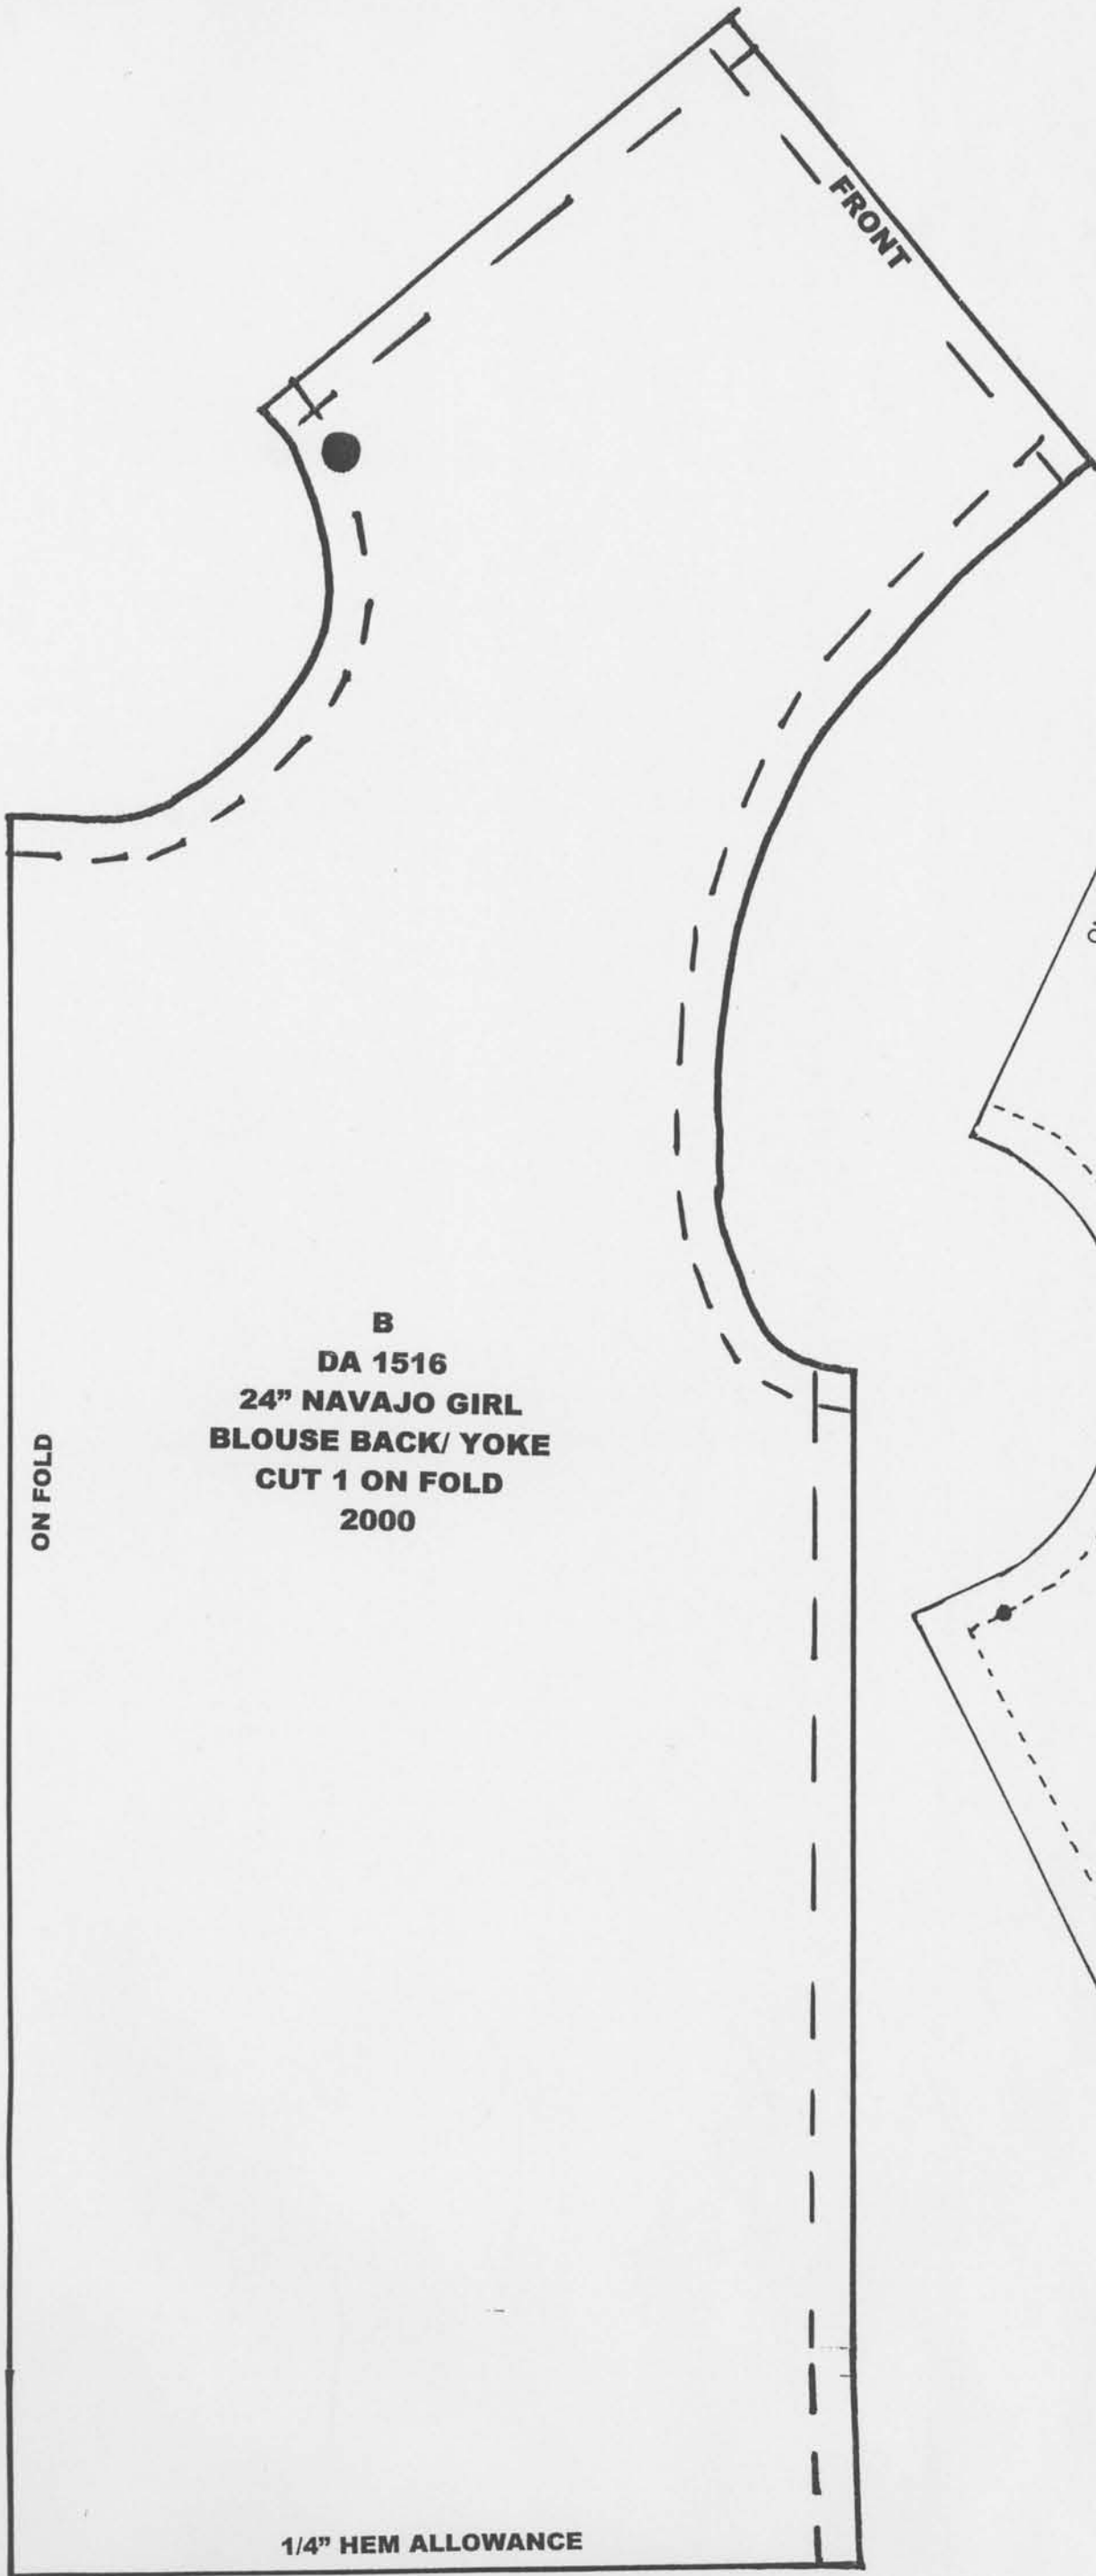

**B**  
**DA 1516**  
**24" NAVAJO GIRL**  
**BLOUSE BACK/ YOKE**  
**CUT 1 ON FOLD**  
**2000**

ON FOLD

1/4" HEM ALLOWANCE

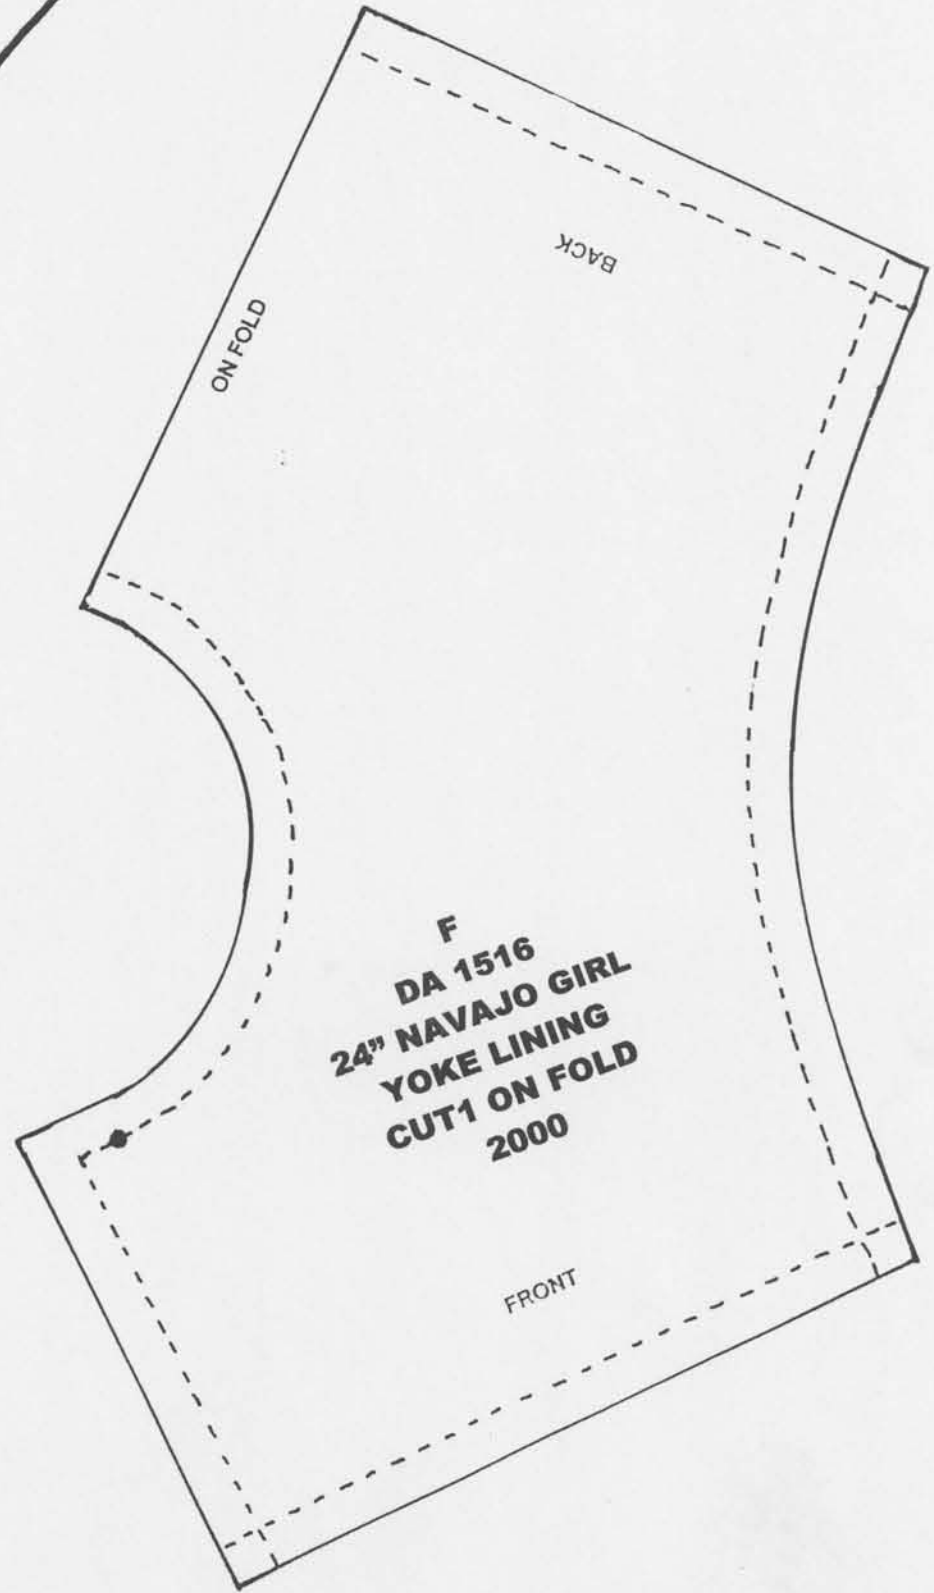

**F**  
**DA 1516**  
**24" NAVAJO GIRL**  
**YOKE LINING**  
**CUT 1 ON FOLD**  
**2000**

ON FOLD

FRONT