

Thanks for choosing Yottamaster!  
Please read this user's manual carefully before using it!

## What is in the box

1. The Product.....1PCS
2. Data Cable.....1PCS
3. Power Adapter.....1PCS
4. Power Cord.....1PCS
5. User Manual.....1PCS

## Product Introduction

Yottamaster YTB4 expands a Thunderbolt 4 interface for your PC through Thunderbolt 4 interface. USB-C 3.2Gen2 10Gbps×1, USB-A 3.2Gen2 10Gbps×1, USB-A 2.0 480Mbps×2, DP interface 1.4×1, HDMI interface 2.0×1, 10/100/1000M LAN ×1, Headphone output/microphone combosocket ×1, SD/TF interface 3.0 ×1, To meet the daily audio and datatransmission needs of PCs, the shell adopts all-metal design, anodized, simple and stable structure with strong heat dissipation function.



## Product Features

- **Integrated Multi-Interface Design:** The Thunderbolt 4 Dock features a comprehensive set of interfaces, including USB-A, USB-C, SD/TF card slots, 3.5mm headphone/microphone combo, HDMI, and DP ports. This integration of various connection needs into one device allows you to effortlessly connect a variety of external devices without the need for frequent adapter changes.
- **High-Speed Data Transfer:** The two Thunderbolt 4 ports support data transfer speeds of up to 40Gbps, ensuring quick access and transfer of files, ultimately enhancing work efficiency. Experience seamless and smooth data transfers, ideal for demanding tasks such as large file processing and video editing.
- **PD Charging and Device Daisy chaining:** Supports 85W PD charging, providing fast and reliable power supply to connected devices. Additionally, the device supports daisy chaining, enabling you to connect multiple devices through a single port, simplifying your connection layout and improving workspace tidiness.

## Specifications

Model	YTB4
Dimensions	180(L)×87(W)×26(H)mm
Material	Aluminum alloy+ABS
Input Interfac	USB-C
Output Interfaces	Thunderbolt 4 Port: PD 85W Thunderbolt 4 Expansion Port: PD 15W, supports daisy chaining USB-C 3.2 Gen2 10G×1, USB-A 3.2 Gen2 10G×1, USB-A 2.0 480M×2, RJ45 Gigabit Ethernet Port, SD/TF 3.0 Card Slots, 3.5mm Headphone/Microphone Combo Jack, DP 1.4 Video Port 8K30HZ/4K60HZ, HDMI 2.0 Video Port 8K30HZ/4K60HZ
DC IN	20V --- 6.5A
Cable Length	1M
Color	Silver
Supported System	Windows 10 and above, Mac OS

## Product Illustration



- ① 3.5mm Headphone/Microphone Combo Jack
- ② USB-C 3.2 gen2 10G×1
- ③ USB-A 3.2 gen2 10G×1
- ④ PD 15W
- ⑤ PD 85W
- ⑥ Power Switch
- ⑦ DC IN
- ⑧ DP 8K30HZ/4K60HZ
- ⑨ HDMI 8K30HZ/4K60H
- ⑩ LAN
- ⑪ USB-A 2.0 480M×2
- ⑫ SD
- ⑬ TF

## Attention


1. Thunderbolt 4 interface can backward compatible with Type-C interface, able to connect with Type-C interface devices, but the speed will be limited without Thunderbolt 4 protocol.
2. TB4 docking station can only provide high-speed performance when the Thunderbolt 4 protocol on the devices. Performance is limited to the performance of the device itself when without Thunderbolt 4 protocol!
3. The aluminum alloy casing has good heat dissipation performance, and it is normal for the casing temperature to be high during use, indicating that heat has been dissipated to the surface of the casing.
4. Manually eject the device before unplugging the dock or unplugging the device inserted in the dock to avoid possible data damage.
5. Some Apple models only support 4K60Hz and do not support 8K@30Hz. Please log in to the Apple official website to check if your model supports 8K@30Hz.
6. M1 Pro chip Mac and M1 Max chip Mac support connecting directly to two external monitors for dual-screen display.
7. M1 chip Mac has a limitation, allowing only one external monitor with a direct connection. To connect two

external monitors, you need to purchase a USB3.0 to HDMI converter that supports the DisplayLink protocol and connect it to the USB-A port on the Thunderbolt 4 dock.


8. There may be compatibility issues when assembling a computer. Please contact the motherboard manufacturer to confirm support. Update the BIOS, Thunderbolt firmware, Thunderbolt drivers, and upgrade the Windows 10 system.

9. Under Windows systems, it needs to manually select the connecting device for the first time connection, otherwise it cannot be used normally. As shown below:

Step1: Right click the Thunderbolt icon in the lower right corner and select the approved connected device.

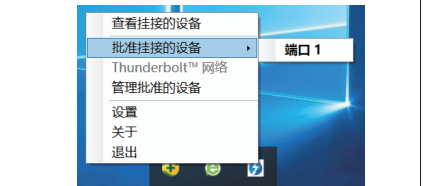

Step2: Choose "always connect" then click "OK"

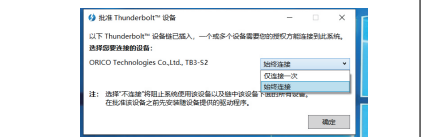

## Notice

1. Please do not hit, throw, or puncture the product, and avoid dropping, squeezing, or bending.
2. Please do not use or store this product in a humid environment and avoid being wetted or rinsed with liquids.
3. Please do not use the product in a hot, high-dust environment and keep it away from fire.
4. Please do not expose this product to the sun.
5. Please do not place this product in a corrosive environment. Do not use other chemical solutions to clean the product.
6. Please do not place the product or accessories in appliances with strong electromagnetic fields and away from magnetic equipment.
7. Please keep the product and accessories away from children. Do not allow children to use the product without supervision.
8. If you need a product with a power adapter, please use the power adapter specified by our company.
9. Please do not disassemble and repair the product or accessories without the authorization of ORICO.
10. If you have any questions during the use of this product, please feel free to contact your dealer or Yottamaster Customer Service Center.

## Declaration

ORICO Technologies Co., Ltd., all rights reserved. Thank you so much for purchase Yottamaster product. Please refer to this manual when using orico product or experienced issues. Additionally, please kindly contact Yottamaster customer care team if any concern. Yottamaster® is registered trademark of ORICO Technologies Co., Ltd.. Any other product, trademark, service or company mentioned herein is trademark or registered trademark of the respective owners.

This manual is for reference only and it's not a guarantee. ORICO Technologies Co., Ltd. reserve all rights of maintenance to this manual and shall not liable for any lost or damage resulting from this manual. Please kindly contact orico customer care team when any concern. ORICO Technologies Co., Ltd shall not liable for compensation and maintenance of the following conditions.

1. Any special, incidental, indirect and secondary lost or damage.
  2. Profit and revenue lost or damage.
  3. Files, data, drive and device lost or damage.
- Note: Compensation for lost or damage resulting from This manual or orico product shall not exceed the payment of your purchase to this product.

## FCC

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

## Mode d'emploi

## Avis

- Veuillez ne pas frapper, jeter ou percer le produit et éviter de le laisser tomber, de le presser ou de le plier.
- Veuillez ne pas utiliser ou stocker ce produit dans un environnement humide.
- Veuillez ne pas utiliser le produit dans un environnement chaud et poussiéreux et le tenir à l'écart du feu.

## Manual del usuario

## Aviso

- No golpee, arroje ni perforo el producto y evite dejarlo caer, apretar o doblar.
- No utilice ni almacene este producto en un ambiente húmedo.
- No utilice el producto en un ambiente cálido y polvoriento y manténgalo alejado del fuego.

## Bedienungsanleitung

## Hinweis

- Bitte schlagen, werfen oder durchstechen Sie das Produkt nicht und vermeiden Sie ein Fallenlassen, Quetschen oder Biegen.
- Bitte verwenden oder lagern Sie dieses Produkt nicht in einer feuchten Umgebung.
- Bitte verwenden Sie das Produkt nicht in einer heißen, staubigen Umgebung und halten Sie es von Feuer fern.

## Istruzioni per l'uso

## Avviso

- Non colpire, lanciare o forare il prodotto ed evitare di farlo cadere, schiacciare o piegare.
- Si prega di non utilizzare o conservare questo prodotto in un ambiente umido.
- Non utilizzare il prodotto in un ambiente caldo e polveroso e tenerlo lontano dal fuoco.