Latest Revision: 5/11/2021



SDHQ Motorsports www.SDHQoffroad.com

Product Packing List	<u>t</u>
Product: <u>SDHQ-53-1139-G3-(SOS)</u>	
Description: 2014–21 Toyota Tundra Swit	tch Pros RCR-12
Overhead Keypad Mount	
(1) SDHQ Tundra Switch Pros OH Keypad Mount	
 Without SOS 	SDHQ-53-1139-G3
o With SOS	SDHQ-53-1139-G3-S09
(1) Hardware Package	SDHQ-53-1139-G3-HP
(4) #6 - 32 x 3/16" S.S. Button Head Bolts	



SDHQ Motorsports 190 S McQueen Rd Ste 109 Gilbert, AZ 85233 www.SDHOoffroad.com

INSTALLATION INSTRUCTIONS

Product: SDHQ-53-1139-G3(-SOS)


Description: 2014-21 Toyota Tundra Switch Pros RCR-12 Overhead Keypad Mount



<u>Parts I</u>	<u>List</u>	<u>Hardware List</u>	Required Tools
	os OH Keypad Mount DHQ-53-1139-G3 DHQ-53-1139-G3-SOS	(4) #6 – 32 x 3/16" S.S. Button Head Bolts	Plastic Panel Remover 5/64" Hex Drive Thread Locker (Medium)

Tech Notes

SDHQ-53-1139-G3(-SOS) panels only fits the 2014-21 Tundra without a sunroof. **Approx install time = 15 Minutes (not including wiring)**

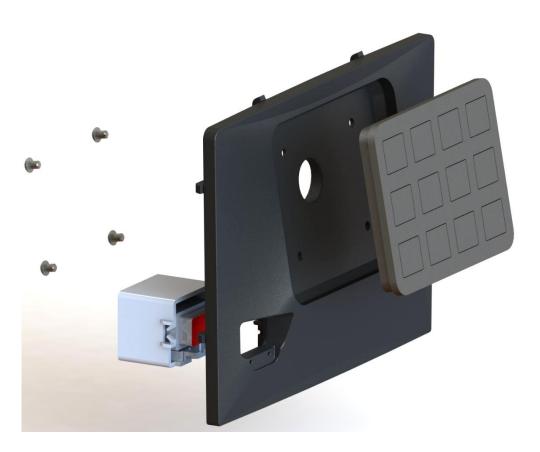


Installation Instructions:

- 1. Unbox your SDHQ Tundra Switch Pros RCR-Force-12 Overhead Keypad Mount and hardware.
- 2. Remove the factory overhead panel. Using a plastic panel removal tool, remove the square plastic panel. Pry along the edges of the panel, being careful not to scratch the plastic. If applicable, disconnect the SOS button from the wiring and then remove it from the panel.



3. Installing the Keypad. Place the RCR-Touch cover onto the RCR-Force-12 Keypad. Feed the wire harness through the center hole in the SDHQ Overhead Keypad Mount and insert the Keypad. Secure the Keypad with the supplied (4) #6 Button Head Bolts and thread locker. Install the SOS button as pictured, if applicable.



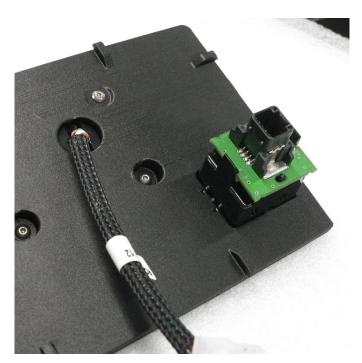

4. Once finished and wiring has been ran, install the panel in the reverse order as removed. The new panel is a tight fit, it may help to use your panel removal tool to guide the edges in place. Enjoy your new SDHQ Built Switch Pros RCR-Force-12 Overhead Console Mount!



Double check all hardware is installed correctly and tight

Re-torque ALL bolts after 100 miles



190 S McQueen Rd Ste 109 Gilbert, AZ 85233

www.sdlngoffroad.com

Follow us on:



