


BRECKENRIDGE

ICONIC COLLECTION

Northern
WIDE PLANK

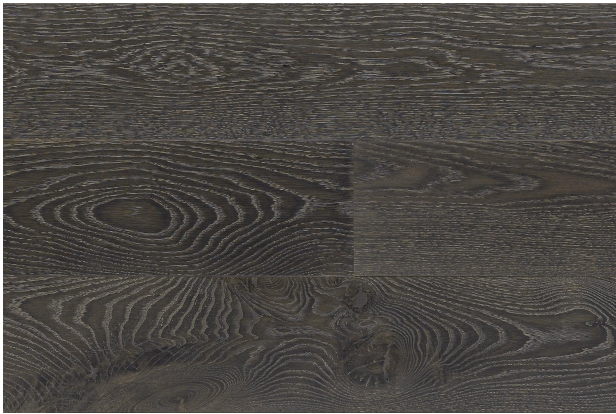

SPECIFICATIONS

MANUFACTURED:	MADE IN CANADA
WOOD ORIGIN:	NORTH EASTERN/CENTRAL USA
WOOD SPECIES:	WHITE OAK
TYPE:	ENGINEERED
GRADE:	AVAILABLE IN CHARACTER OR SELECT
SHADE:	DARK
SURFACE:	SANDED
EDGES:	MICROBEVELLED (PLANK - LONG SIDES ONLY)
THICKNESS:	20 MM (3/4") WITH 6 MM WEAR LAYER *TOP LAYER THICKNESS IS MEASURED BEFORE THE FINISHING PROCESS.

BRECKENRIDGE AT NIGHT WITH ITS ICE-CAPPED PEAKS ASCENDING TO THE MOON AND STARS. THIS IS THE VISION BEHIND THESE TEXTURED, LUXURIOUSLY MODERN PLANKS. BLACK AND GREY WITH UNDERSCORES OF BROWN, THE AESTHETIC IS RICH, DARK, AND DEEPLY RESONANT. FROM WYOMING LODGE TO EAST COAST FARMHOUSE, BRECKENRIDGE IS THE HEIGHT OF REFINEMENT.

CONSTRUCTION:	PURECRAFT 3-LAYER OR WBP BALTIC BIRCH PLYWOOD
FINISH:	HARDWAX OIL (UV CURED)
PLANK WIDTHS:	178 MM / 229 MM / 280 MM (7" / 9" / 11")
PLANK LENGTHS:	914 MM - 3581 MM (36" - 141")

HERRINGBONE DIMENSIONS:	4" X 20" (101.6 MM X 508 MM)
CHEVRON DIMENSIONS:	4" X 16" (101.6 MM X 406.4 MM)
COLOUR VARIATION:	V2 - MODERATE VARIATION
CERTIFICATIONS:	

CLEANING AND CARE

Northern Wide Plank requires a relative humidity range of minimum 30%, maximum 65%, and a temperature range between 15°C (60°F) to 24°C (75°F). Refer to NWP Cleaning & Care for Hardwax Oil finished wood floors for more info.



Declare.

FSC® AVAILABLE UPON REQUEST

TECHNICAL PERFORMANCE

ESSENTIAL CHARACTERISTICS

Reaction to fire

Emission of Formaldehyde

Janka Hardness Rating

Post Consumer Recycled Content %

PERFORMANCE

ASTM E 648-17 Class II

E1 / CARB 2 compliant

1,360 lbf (6,000 N)

NA

INSTALLATION

TYPE	RECOMMENDATION
Full Glue Down	YES - RECOMMENDED
Nail Down	YES - WITH GLUE ASSIST
Floating	NOT RECOMMENDED
Over Underfloor Heating	YES - REFER TO NWP RADIANT HEAT GUIDE

APPLICATIONS: Floors, Walls and Ceilings. Stair Treads, Nosing, and Vents are also Available.

5930 LLOYDTOWN-AURORA ROAD, SCHOMBERG ON L0G 1T0 CANADA
NORTHERNWIDEPLANK.CA 877/763/6169

Date: Mar 7, 2024