

LUMARY SMART UFO LED HIGH BAY LIGHT USER MANUAL



Lumary

Thank you for choosing Lumary! Are you excited to embark on a journey of smart living? Begin by downloading the Lumary App, your gateway to effortlessly managing your smart devices from anywhere using your smartphone or tablet. Our products seamlessly integrate with your home Wi-Fi, enabling you to command multiple devices with the mere touch of your fingertips. At Lumary, we pride ourselves on being a leading producer of smart lighting solutions, dedicated to delivering unparalleled service. We are constantly refining our app and products to ensure that we meet and exceed your expectations. So, why wait? Illuminate your home with the sophistication and convenience of Lumary today. Let's make your space brighter and your life smarter.

Contents

Product & Notes	3
Installation Instructions	4-7
Application Connection	8-13
Group Control	14-16
UI Function Introduction	17
Remote Control	18-20
FAQ	21-25
Parameter Information	26-27
App-To-App Voice Control	28-34


Product&Notes

What's in the Box



- Lumary Smart UFO LED High Bay Light

PACKAGE CONTENTS

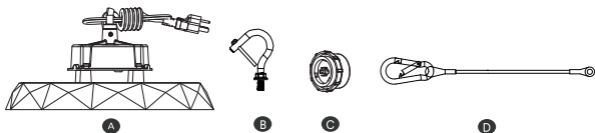

PART	DESCRIPTION	QUANTITY
A	Lumary Smart UFO High Bay Light	1
B	Hook	1
C	BT+ Radar Sensor Module	1
D	Safety rope	1

The input line for the equipment is 4.9 feet long and can be wired directly or connected using a plug, depending on your installation requirements. Once it's connected to a module, you can control the equipment using a mobile app. If the BT module gets damaged or lost, don't worry, as the equipment can still operate normally at full capacity (5000K 100%).

Installation Instruction

Cautions:

1. Do not use an electric generator to test the LED light.
2. Please ensure compliance with relevant country, regional, and local laws and regulations when installing this fixture.
3. Please turn off the power before installation or maintenance.
4. Proper grounding is required to ensure safety.

Notices:

1. To avoid the possibility of electrical shock or fire, the installation personnel must possess professional electric knowledge.
2. Please wear gloves to prevent injury before installation.
3. If any smoke or sparks occur during wiring, immediately turn off the power and notify relevant personnel.
4. Please use a listed waterproof strain relief bushing when connecting the supply cord to the outlet box.


Attention:

1. Please check for any damage during shipping. If damage is found, please promptly contact the manufacturer.
2. Please carefully read the installation instructions to verify the availability of all accessories. After confirmation, proceed to install the LED light according to the provided installation steps.

Note:

1. Please fix the safety rope before installation to prevent the product from falling and hurting people.
2. This Lumary smart device utilizes Bluetooth control chips, enabling direct connection to the Lumary App via mobile Bluetooth communication. If you wish to control the device remotely, you will need access to the gateway.

Flux out:18154 lm

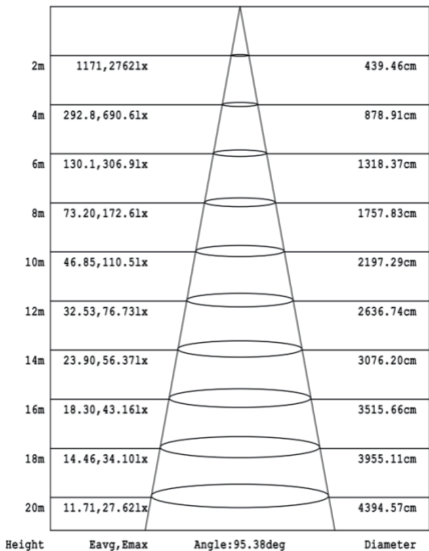

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.


If you need suggestions on how to install the lighting based on the height and distance, feel free to reach out to us for expert advice at support@lumary.tech. We'll be happy to assist you.

To install the DC module, follow these steps:

Figure A: If your fixture has a module receptacle installed, use a screwdriver to remove the 1/2" knockout in the illustrated direction. Then, screw the module kit onto the receptacle.

Once the device is connected to the internet via the Lumary App, power off the light and turn it on when the module's green light turns off. Use the remote control pairing feature to complete the remote control binding process. Once complete, you can control the device using the remote control.

By following these simple steps, you can easily install the DC module and start enjoying the convenience of remote control for your Lumary smart device. Let's get started!

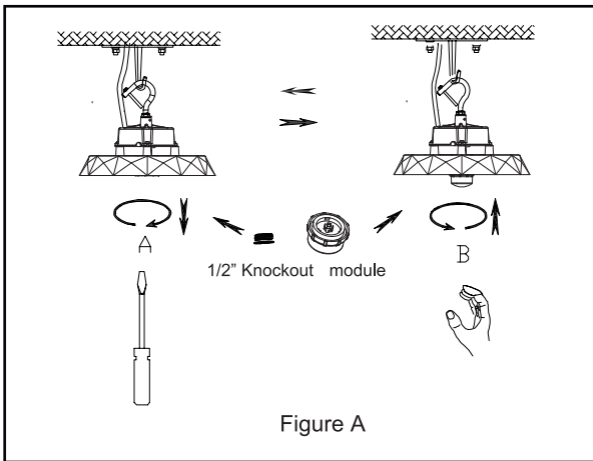

Installation Ways: Hook Mount, Ceiling Mount, 1/2" NPT Mount.
(Please choose the most suitable installation way for the purchased product)

Hook mount

1. Use a screwdriver to screw the hook into the fixture and tighten it firmly.
Refer to Figure 1 for guidance.
2. Hang the fixture on the ceiling hook or chain as shown in Figure 2.
3. After installation, connect the wire of the fixture to the mains according to the local wiring rules, ensuring that the connection is stable. Make sure to provide good protection for the connection.




Figure1



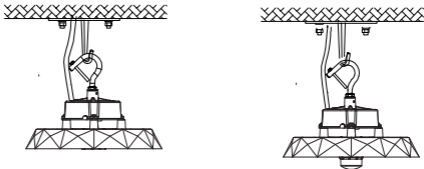


Figure2

Application Connection

1. Search and download "Lumary" App on the App Store or Google Play.

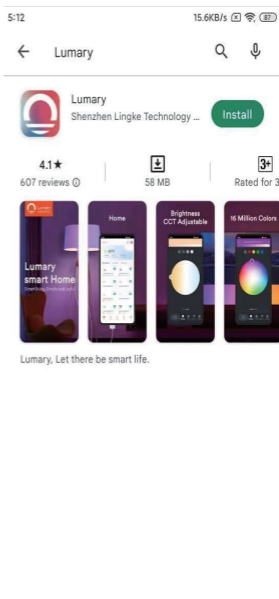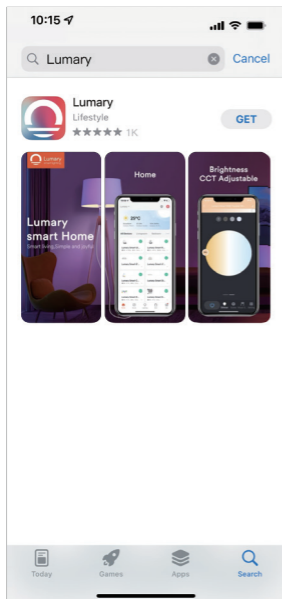

2. Register a Lumary account.

18:15

<

Log In

United States of America

Test@lumary.tech

Password

I Agree [Privacy Policy](#) and [User Agreement](#)

Log In

[Forgot Password](#)

Enter your email address.

18:16

<

Log In

United States of America

Test@lumary.tech

I Agree [Privacy Policy](#) and [User Agreement](#)

Log In

[Forgot Password](#)

Log into Lumary App

Note: Please select your region and country.



3. Connect



Note:

Connect your Lumary smart device to the app using Bluetooth communication. Please note that if you wish to control the device remotely, a gateway needs to be accessed.

Steps:

1. Ensure that your phone is connected to a network and that Bluetooth is turned on.
2. Power on the light, which will start flashing or breathing.
3. If the device is not flashing or breathing, use the remote control to press and hold the "RESET" button for 5 seconds to reset the device.
4. Enter the Lumary App on your phone and click on the "+" icon to search for nearby devices on the network. Once the device is located, click "Add" to add it to the app.
5. If you wish to use a gateway, please refer to the gateway guide for further instructions.

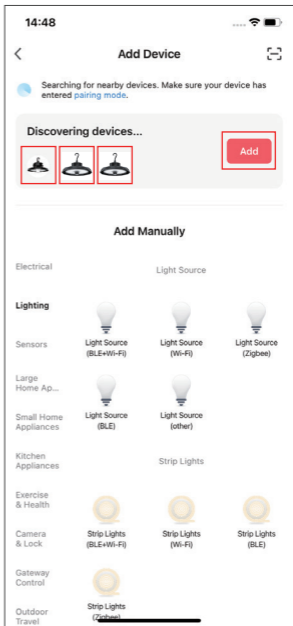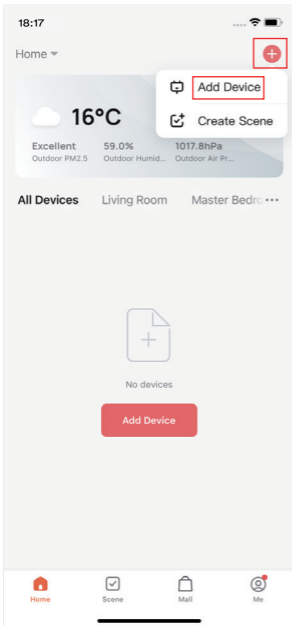

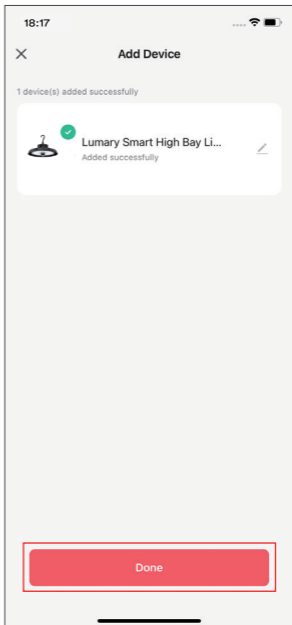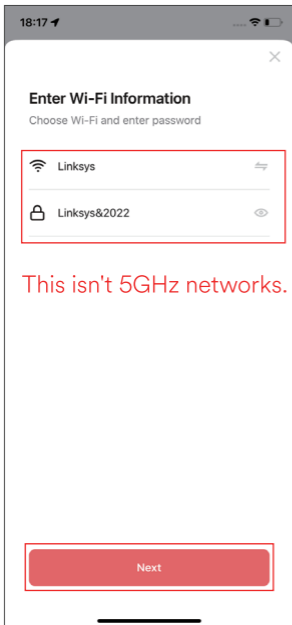

4. Troubleshooting

1. If your Gateway cannot connect to your Wi-Fi network, please ensure that you have entered the correct Wi-Fi password during the setup process. Check for any internet connection issues and try resetting your Wi-Fi router if the Wi-Fi signal is weak.



2. If you are unable to bind your device, you will need two phones. One to set up the hotspot and the other to connect the hotspot and add the device through the app. If the device is successfully added, it is normal. The issue may lie with your router, so please check your router settings for MAC and DHCP restrictions. **Please note that Lumary's products do not support 5GHz networks.**

3. If you need to use the radar sensing feature, you can enable it in the app. Set it according to actual usage conditions.



4. If you have any questions, please contact us through our after-sales email: support@lumary.tech or leave a message on our official social media account.

Group Control



1. Log in to Lumary App, tap the smart device and enter into, click "✎" in the top right corner.

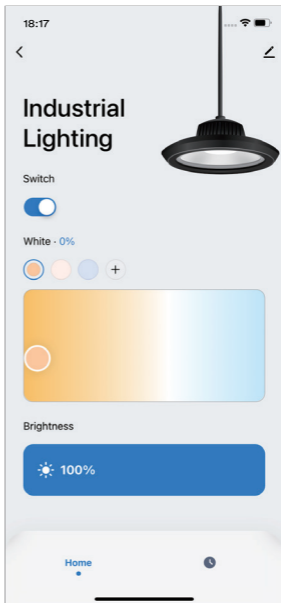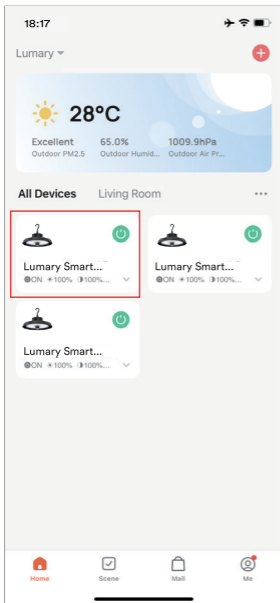

2. Click on "Create Group", then choose devices and save it.

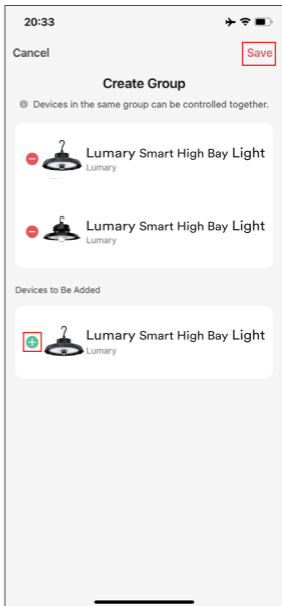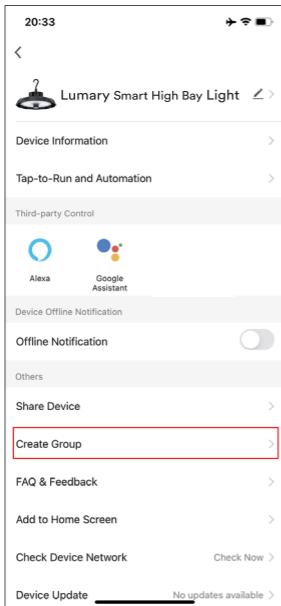

3. Customize the group name and the group will have the ability to control multiple devices at once.

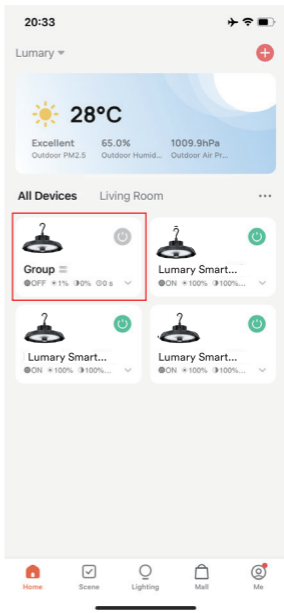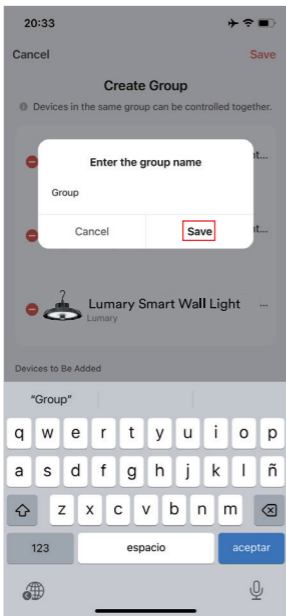


UI Function Introduction



Cool White 5000K
Dimming 10-100%

Remote Control

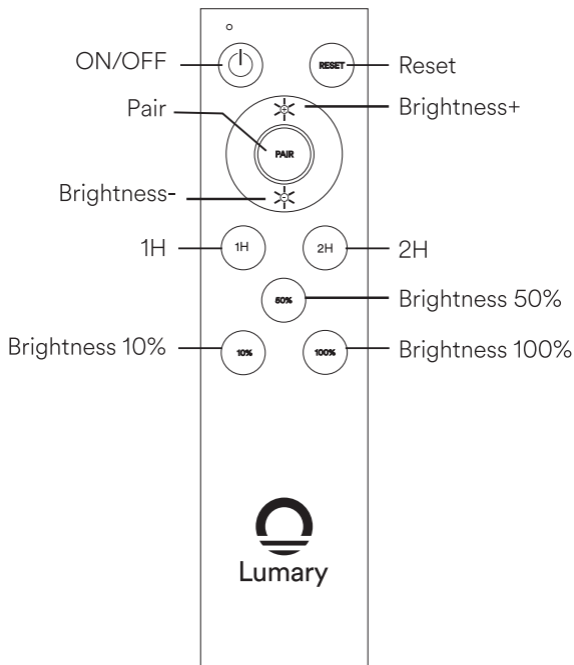



Reset



Pair

Pair Button: 5000K 50% brightness

Reset Button: Press and hold for 5 seconds to initiate pairing mode. The light will breathe for 3 minutes to indicate it's ready to pair.



Brightness+



Brightness-

1. **Brightness +/-:**10% - 20%- 30% - 40%- 50% - 60% - 70%- 80%
- 90%- 100%

Note: You can use the one-button group control to adjust the brightness of the lights. Short press the button to adjust the brightness step-by-step for all devices. (The brightness level may not be consistent across all devices.) To perform stepless dimming, long press the button.



1H



2H

1. Press the timer switch briefly (the device will breathe once to indicate configuration success), press and hold for 3 seconds to cancel the timer (the device will breathe twice to indicate configuration success).

Binding instructions

Using the Remote Control to Operate the Device:

1. The remote control is powered by 2 AAA batteries.
2. The device needs to be connected to the App.
3. Turn the switch off once and wait until the green indicator light on the module went out. Then, turn the switch back on. Within 30 seconds, the light and remote control will enter pairing mode.
4. Press and hold the "Pair" button on the remote control for 1 second to initiate pairing. The light will breathe once to confirm successful pairing.
5. The remote control works up to a distance of 50 feet.
6. If you run into any issues, don't hesitate to get in touch with us at support@lumary.tech. We're here to help!

FAQ

1. What should I do, if I don't have internet access to my Lumary product?

You can still set it up using two mobile phones. First, use one of the phones to create a hotspot. Then, use the other phone to connect to the hotspot and add the device through the Lumary app, following the guide. This will allow you to use your Lumary product even without an internet connection.

2. If my Wi-Fi internet goes down, will Lumary App still work?

You won't be able to control Lumary products remotely using the app. However, you can still control the device using the app via the LAN or Bluetooth connection. This allows you to perform basic functions such as turning the device on or off, dimming the lights, adjusting the color temperature, and changing the colors.

3. Why does the flickering occur with Lumary products?

Lumary products come with a default network configuration set at the factory. If the device is not connected to the network, it will flash for three minutes every time it's powered on. Once connected to the network, it will stop flashing and automatically connect to the network when it's switched off and on via the wall switch after 15 seconds. This flickering issue can be resolved by ensuring the device is connected to the network properly.

4. Can I share with family and friends?

Absolutely, you can easily share access to your Lumary devices with family and friends. To do so, enter the Lumary App and go to your main device list. Select one of the devices and tap on the "..." button located on the top right corner of the screen. From there, click on "Share Device" to give or revoke sharing permissions. It's important to note that the other user should have already downloaded the Lumary App and created an account in order to receive the shared device.

5. Can I group multiple Lumary devices together?

Certainly! You can easily group multiple Lumary devices together. Whether you want to group them by room, location, or any other way you prefer, it's all possible. You can even have the same devices in multiple groups. For instance, if you want to create a group for "Bedroom" and another for "Entire House," you can include your bedroom lights in both groups. To create a group, simply click on one of the devices you want to group from your main device list, then press the "..." button on the top right for advanced settings, and click "Create Group." You can then name the new group and select which devices you'd like to group together.

6. My Lumary device has a funny name. How do I rename it?

To rename your Lumary device, go to your main device list in the Lumary App, and select the device you want to rename. Click on the "..." button on the top right for advanced settings, and select "Modify Device Name" (or "Modify Group Name"). You can then choose a new name for your device that is more familiar and easily recognizable.

8. What should I do if the device Appears offline or is unreachable?

To troubleshoot when your Lumary device appears offline or is unreachable, there are a few things you can try.

First, ensure that your Wi-Fi router is online and within range of the device.

Next, check that you have the latest Lumary functionality by clicking "Check for firmware update" in your device settings.

If the issue persists, you can try turning off the device, clearing the application cache, rebooting the router, and then turning the device back on after one minute. Wait for five minutes and check the device status again.

9. How many devices can I control?

- The maximum quantity of timers that can be added to a single device is 30.
- The maximum quantity of devices that can be added to a single home is 120.
- The maximum quantity of Tap-to-Run that a single home can create is 100.
- The maximum quantity of Automations that can be created in a single home is 100.

- The maximum quantity of tasks that can be added in a Tap-to-Run is 150.
- The maximum quantity of tasks that can be added in an Automation is 150.
- The maximum quantity of conditions that can be added in an Automation is 10.
- The maximum quantity of mobile devices that can simultaneously log in to an account is 200.
- The maximum quantity of Homes that can be created by a single App account is 20.
- The maximum quantity of home members that can be added in a single home is 20.
- The maximum quantity of rooms that a single home can create is 20.
- The maximum quantity of devices that can be added in a single room is 50.
- The maximum quantity of devices that can be added in a single device group is 100.
- The maximum quantity of device groups that a single home can create is 20.
- The maximum quantity of each device group that can be shared with other users is 20.
- The maximum quantity of each device that can be shared with other users is 20.
- The maximum quantity of each App account that can be invited by other homes is 20.

10. What should I do,when I find a problem with the purchased product?

If you encounter any issues with your purchased Lumary product, please reach out to us at support@lumary.tech and provide your Amazon order ID. Our team is committed to ensuring your complete satisfaction and will do everything we can to resolve the problem promptly. If the issue is with the product itself, we will gladly exchange it for a new one without delay.

11. How can I reset the Bluetooth device?

You can reset the device using the remote controller. Simply press and hold the button for 5 seconds to activate pairing mode. The light will breathe for 3 minutes, indicating that it's ready to pair.

Parameter information

Name	Lumary Smart High Bay Light B
Model	L-HB100/150/200B1
Input Voltage	120-277VAC,50/60Hz
Wattage	100W/150W/200W
Color Temperature	5000K
CRI	80+
Luminous Efficacy	160lm/W
Beam Angle	90°
Rated Life	25000h



FCC ID: 2ANDL-BT3L

Made in China

CAUTION:

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.



VOICE CONTROL GUIDE

Name and Control Each Device by Voice




Work With Amazon Alexa

1. Log in to Lumary App, tap the smart device and enter into, click "✎" in the top right corner.
2. Tap "Alexa" in Third-party Control.
3. Tap "Sign In With Amazon".

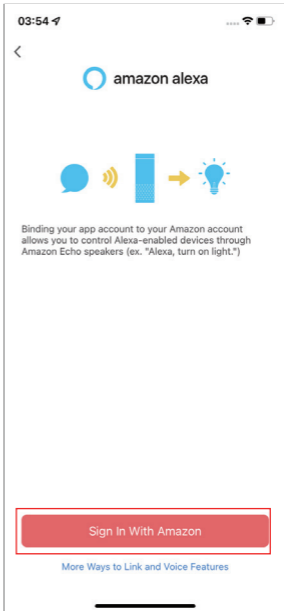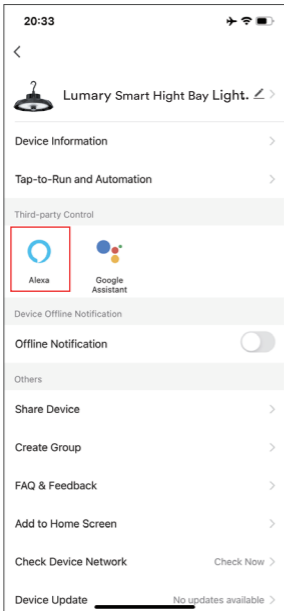

4. Tap "Allow";
5. Linked successfully, when add new device, there is no need to link again, just discover new device in Alexa.

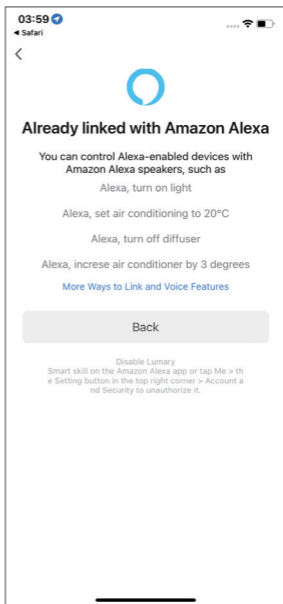



To control your Lumary smart device, just ask Alexa. Make sure your devices are already set up using the Lumary app.

Things you can say*:

"Alexa, discover my devices."

"Alexa, turn on the bedroom light."

"Alexa, set the bedroom light to orange."

"Alexa, turn off the coffee machine."



"Alexa, set the living room to 50%."

"Alexa, dim porch light."



*Some commands require compatible devices.

Work With Google Assistant

1. Log in to Lumary App, tap the smart device and enter into, click "✎" in the top right corner.
2. Tap "Google Assistant" in Third-party Control.
3. Tap "Link with Google Assistant".

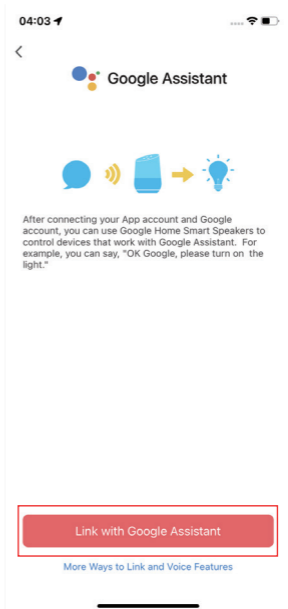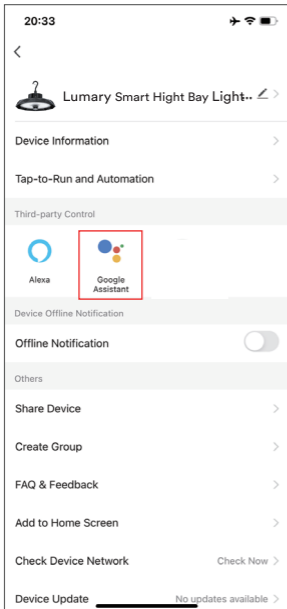

4. Click "Agree and link";
5. Linked successfully, when add new device, there is no need to link again, just discover new device in Google Home.

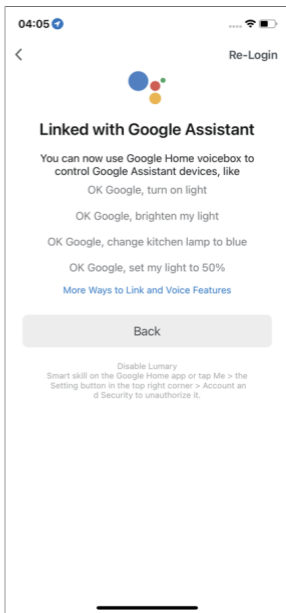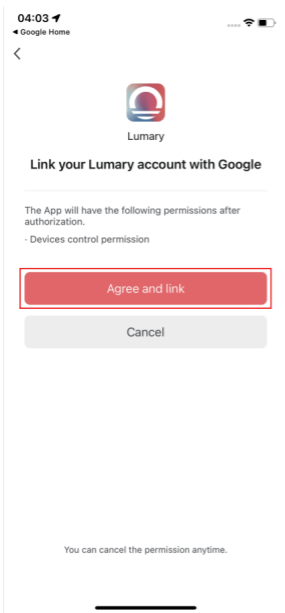



To control your Lumary smart device, just say "Hey Google", and ask.

Make sure your devices are already set up using the Lumary app.

Things you can say*:

"Hey Google, turn on all the lights in my bedroom."

"Hey Google, turn off the light."

"Hey Google, set the bedroom light to orange."

"Hey Google, turn off the coffee machine."

"Hey Google, set the living room to 50%."

"Hey Google, dim porch light."

*Some commands require compatible devices.

If you have any questions about use and operation, you can contact us!

Customer Service Email:

support@lumary.tech

You can also search for our "account name" and "enter URL" on social media platforms or directly scan the following QR code to find us quickly.


- Facebook: US-Smart Home
(<https://www.facebook.com/Lumary-Smart-Lighting-102878658675054>)
- YouTube: Lumary Official
(<https://www.youtube.com/channel/UCcEQnWxockzsPwyPOfSppug>)
- Instagram: lumary Smart Home
(<https://www.instagram.com/lumarysmartlights/>)
- Twitter: Lumary @Lumarysmarhome
(<https://twitter.com/Lumarysmarhome>)
- Pinterest: Lumary Smart Home
(<https://www.pinterest.com/LumarySmartHome/>)



Facebook



Youtube



Instagram



Twitter



Pinterest

Can't connect? Need help?



**WE
CAN
HELP**

HAVING AN EASY TALK TO US BEFORE YOU RETURN
THE PRODUCT WILL FIX A PROBLEM MORE QUICKLY

Lumary support:

support@lumary.tech

Visit us at:

www.lumary.tech

www.lumarysmart.com