

## LED Ecobright Shoebox Light

**DANGER!**

Risk of shock. Disconnect power before installation.

**WARNING!**

- Risk of fire or electric shock. Installation requires knowledge of luminaires electrical systems. If not qualified, do not attempt installation. Contact a qualified electrician.
- Risk of fire or electric shock. Install this product only in luminaires that have the construction features and dimensions shown in the photographs and/or drawings and where the input rating of the product does not exceed the input rating of the luminaire.
- Only those open holes indicated in the photographs and/or drawings may be made or altered as a result of kit installation. Do not leave any other open holes in an enclosure of wiring or electrical components.
- To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects. Do not make or alter any open holes in an enclosure of wiring or electrical components during installation.
- Installers should not disconnect existing wires from lampholder terminals to make new connections at lampholder terminals. Instead installers should cut existing lampholder leads away from the lampholder and make new electrical connections to lampholder lead wires by employing applicable connectors.
- Risk of fire or electric shock. Luminaire wiring and electrical parts may be damaged when installing hardware. Check for enclosed wiring and components.
- Risk of fire or electric shock. Check the existing wiring for damage before installing. Do not install if existing wires are damaged.
- This product is accepted as a component of a luminaire where the suitability of the combination shall be determined by authorities having jurisdiction.
- "This luminaire has been modified and can no longer operate the originally intended lamp," shall be marked on the retrofit luminaire where readily visible by the user during normal maintenance, including relamping.
- "This luminaire has been modified to operate LED lamps. Do not attempt to install or operate \*lamps in this luminaire" shall be marked on the retrofit luminaire where readily visible by the user during normal maintenance including relamping. "\*" shall be replaced by the original illumination type such as "fluorescent," "HID," etc.
- This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions:  
(1) This device may not cause harmful interference and (2) this device must accept any interference received, including interference that may cause undesired operation.
- LED Lamp Replacement Marking – Identification of the replacement LED lamp type / Model to be used along with manufacturer and ordering information.

## LED Ecobright Shoebox Light: Pole Mount

## Installation Steps

*Disconnect All Power***STEP 1**

Remove the side plate from mounting bracket. Please skip to step 3 if mounted onto the square Pole.

**STEP 2**

Attach round pole mounting plate on mounting bracket.

**STEP 3**


Route the cord into mounting bracket through the hole for wiring, slide the fixture onto the bracket and tighten 2 bottom screws.

**STEP 4**

Slightly drag the wires to make sure the hole on bracket is sealed by silicon gasket.

**STEP 5**

Make wiring connection as per wire diagram below, replace the side plate and fasten screws.

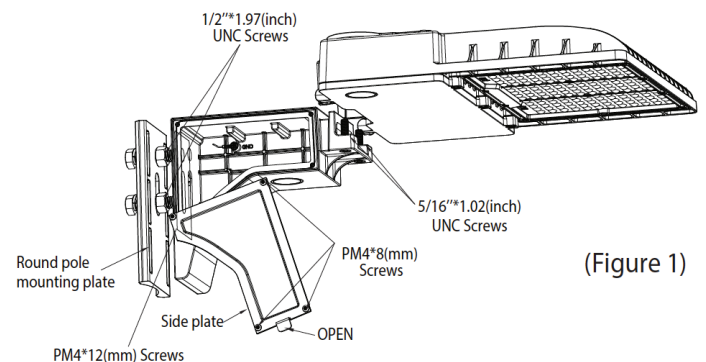

## LED Ecobright Shoebox Light: Slipfitter Mount

## Installation Steps

*Disconnect All Power***STEP 1**


Connect the wires to Line, Neutral, Ground.

**STEP 2**

Remove the cover and adjust the bracket to the desired angle.

**STEP 3**

Install the bracket on the pole and fix it with screws.

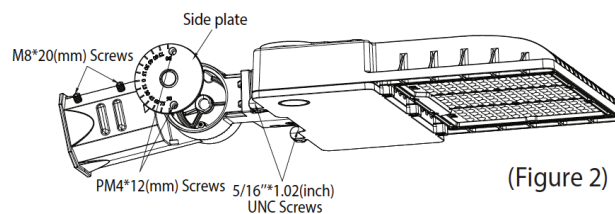

## LED Ecobright Shoebox Light: Wall Mount

## Installation Steps

## Disconnect All Power

## STEP 1

Remove the side plate by loosen the screws.

## STEP 2

Fix the back plate onto the arm bracket with screws provided.

### STEP 3


Use the metal template provided to locate footprint on the wall to drill the holes, then fix the bracket on the wall with screws.

## STEP 4

Route the power cord into wall mount bracket, slide the fixture onto the mounting bracket, then tighten bottom screws.

## STEP 5

Make wiring connection inside of bracket and replace the side plate with screws.

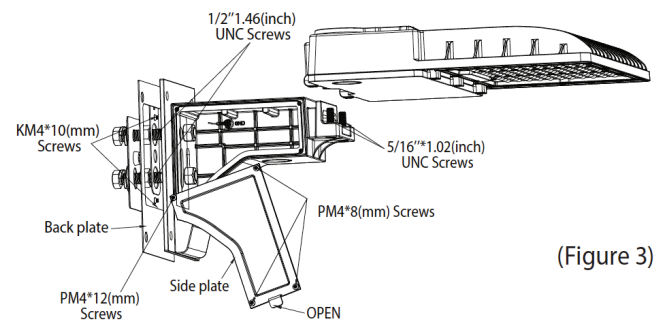

(Figure 3)