



BlackBox[®]

Electrical Energy Management Device

**Compact Design
Fits Around Most
Electrical Panels**



Dimensions:

L: 10" x W: 10" x D: 6"

Dimensions:

L: 254mm x W: 254mm x D: 152mm

INSTALLATION MANUAL

MAIN RATING SUPPLY MONITORED

240-208V / 120V, Single Phase – 125 - 200 Amp

MAX RATING OF GENERAL USE DEVICE CONTROLLED

240-208V or 120/240V Single Phase – 90 Amp Resistive Load

240-208V or 120/240V Single Phase – 75 FLA, 240 LRA @ 240/277V

EV CHARGER TO BE CONTROLLED

240-208V or 120/240V Single Phase, 3 Phase available upon request

240-208V or 120/240V Single Phase 55 Amp up to 90 Amp

MODEL NUMBERS BY TYPE

EVEMS240-200-DUO for 125, 150, 200 Amp Electrical Service

READ AND SAVE THESE INSTRUCTIONS



CAUTION: DO NOT STORE THIS MANUAL OR OTHER COMBUSTIBLE MATERIALS INSIDE THE EVEMS OR OTHER ELECTRICAL PANELS

TABLE OF CONTENTS

| | |
|--|-------|
| Introduction _____ | 4 |
| Safety _____ | 4-5 |
| Specifications _____ | 5-6 |
| Installation Diagram _____ | 6 |
| Installation Instructions _____ | 7-12 |
| Setup for Single Circuit Load Sharing _____ | 11 |
| Multi-residential Hub Connection & Remote Shutdown Override _____ | 12 |
| Maintenance _____ | 13 |
| Troubleshooting _____ | 13-15 |
| Information _____ | 16-17 |

INTRODUCTION

The contents of this manual are subject to copyright protection and other intellectual property protection of Black Box Innovations Inc. and its licensors. Without the written consent of Black Box Innovations Inc. this installation manual cannot be modified, reproduced, or copied. The following logos are trade names or trademarks of Black Box Innovations Inc. in the United States and Canada. If you would like more information, please submit a request.

IMPORTANT SAFETY INSTRUCTIONS

WARNING – INSTRUCTIONS PERTAINING TO A RISK OF FIRE OR ELECTRIC SHOCK

When using electric products, basic electrical shock and fire prevention precautions should always be followed including, but not limited to, arc-flash protection, pre-energizing electrical resistance checks, availability of fire prevention equipment, and the use of appropriate installation and testing tools.

Read all instructions before using this product. Do not use this device if parts are broken, cracked, or defective, instead please contact the manufacturer. Installation and servicing must be carried out by a qualified professional. Use appropriate caution when connecting and disconnecting the device from any power source. Always make sure the device is disconnected from the power source before beginning installation or maintenance service. Installation must be completed to relevant local codes.



PROHIBITING - No access for unauthorized persons



CAUTION - Warning of a danger or a dangerous situation



ELECTRICAL HAZARD - Warning of a potential electrical hazard that could result in injury and/or fire

SPECIFICATIONS

This device has a monitoring system that can protect an electrical distribution circuit by switching a load on or off based on its main breaker size and on what the system usage is. It will act to prevent systems connected to it from overloading the electrical distribution circuit. It does so by turning off the power to the load connected to it for the duration that the computational algorithm determines it is necessary as it relates to the main breaker sizing.

| | |
|--|---|
| Voltage | 240/208V or 120/240V AC single phase |
| Main Lug Wire Size & Torque | 14 - 4 AWG (Cu only) <i>Torque for Cu 75°C: 50-54 in-lbs (5.5 Nm)</i> |
| Contactor Insulation System | 120°C, Class B |
| Frequency | 50 or 60 Hz |
| Operation ambient temp. | 34°F to 104°F (1°C to 40°C) |

Dimensions*

10"(H) x 10"(W) x 6"(D)
254mm(H) x 254mm(W) x 152mm(D)

Weight*

12 lb
(5.45kg)

*Dimensions and weight are approximate figures and are subject to change without notice.


Applicable Model Naming Convention

Device Name, Voltage – Max Main Service Breaker Size-End Device Max Current Draw
EVEMS240 – 200-90A

Operation After Power Outage

In the event of a power outage, the device automatically restores the power supply to the vehicle charging station or receptacle when power returns and the algorithm determines that the current draw and other factors are under the setpoint for the determined period set by the installer.

INSTALLATION DIAGRAM

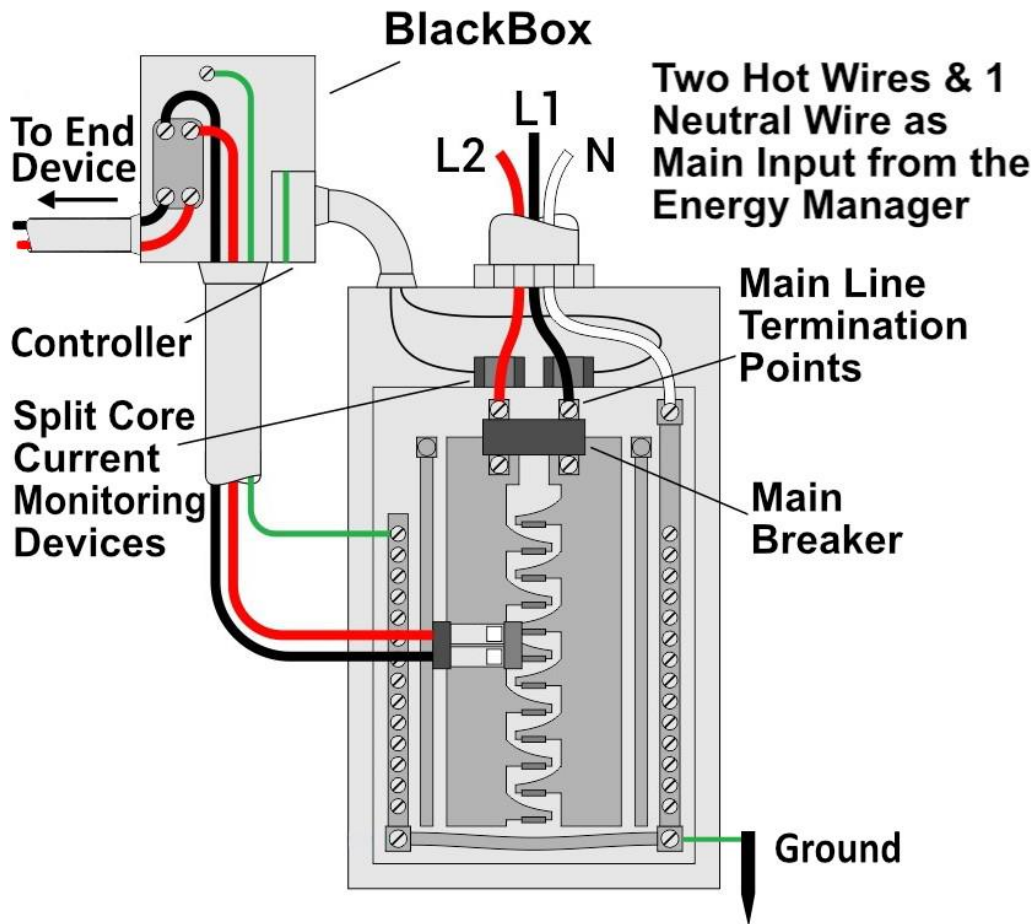

Alternate locations for device installation are acceptable.

INSTALLATION INSTRUCTIONS



STEP 1: CHECK THE CONTENTS OF THE PACKAGE

Model#: DEVICEXXX-XXX-XXX

1 x Controller & enclosure, 2 x Current monitoring devices, 1 x Bag including miscellaneous pieces, 1 x Installation instructions, 1 x Black Box device controlled label

STEP 2: PREPARING FOR THE INSTALLATION

WARNING – INSTRUCTIONS PERTAINING TO A RISK OF FIRE OR ELECTRIC SHOCK

1. Disconnect power to all devices being worked on or within an unsafe distance to the working area.
2. Select the device installation location.

- The recommended place for the device to be installed is directly above the main panel and with adequate air circulation. See Installation Diagram for suggested locations.

NOTE: The device controller must be mounted so that the nameplate remains visible at all times. It must not be installed in the orientation with the cover facing the ground.

DO NOT install the device:

- Outdoors
- In a location with a high level of risk as defined by local electrical codes or in a hazardous location.

For example, nearby flammable materials, explosives or fuels, chemical products, and hazardous vapors.

STEP 3: INSTALLATION OF THE DEVICE

Ensure no dust or metal particles enter the contactor as all contactors can be affected negatively by particles entering the active surfaces. Do not blow out particles when completing the installation. Instead, use a vacuum to clean out the enclosure.

1. Loosen the two cover screws and remove the enclosure cover.
2. Attach the device securely to the desired location. There are multiple acceptable orientations. Do not mount with the cover plate facing down.
3. Remove the internal control partition by unscrewing the two screws inside the enclosure.

If using the "Single Circuit Load Sharing" option please refer to page 11 of this manual for instructions

4. Install current monitoring devices on the main service wires to be monitored by clipping them onto each main line paying attention to the arrow inside the window and labeling that indicates the direction of current flow and orientation of connection. Current monitoring devices should be

installed so that no part of them will directly conduct electricity from exposed live parts. Ensure the closing clip is secured shut and fastened with a cable tie. Fasten the current monitoring devices in place with the cable ties. *Review and observe all local safety procedures when installing and working near live parts.*

5. Ensure main line lugs have not come loose with the installation of current monitoring devices.
6. Install the current monitoring device wire leads from the service area to the device control partition area ensuring the polarity of the leads remains as from the factory. If connectors are disconnected the factory-installed polarity must be maintained. *(DO NOT coil wires near or install them parallel to any other 120/240V wires as this may cause improper operation. DO NOT short wire leads together or to ground at any time. Install leads with mechanical protection from damage.)*
7. Insert the **two blue current monitoring device connectors into the corresponding two blue receptacles on the control board. Trim wires as needed but maintain wire polarity in the blue connectors and ensure wires and connectors are seated well in each receptacle.** (The correct polarity should have the red wire closest to the wall of the partition while the connector is plugged into the socket.)
8. **Set up switches and observation time dial as indicated in the chart and diagram later in this document or the back of the cover of the enclosure. The switches will tell the computer both the service size and the controlled device's current rating. The dial will provide the time element for the algorithm to turn the end device being controlled back on between 0-15 minutes (clockwise is greater). It is recommended to start with the center of travel. These switches and dial are located on the control board.**
9. Re-install the cover of the control partition inside the enclosure by reinstalling the screws removed previously and tightening them until snug. Do not over-tighten. Be sure not to pinch any wires or strip the screws.
10. Install electrical lines from the supply breaker for the controlled device to the marked **LINE SIDE (L1 & L2)** of the contactor and bonding/ground attachment.
***** WARNING: Contactor electrical connections MUST be torqued to 40-44 in-lb (5 Nm) to avoid objectionable operational noise, overheating issues, and premature failure. *****
11. Install electrical wires from the end device to be controlled (i.e. EV charger) to **LOAD SIDE (T1 & T2)** of contactor and bonding/ground as required by local electrical codes. Ensure wire terminals are torqued to 40-44 in-lb (5 Nm). If the neutral or identified conductor is used for the end device it can be spliced in the enclosure with the wire nut provided for the following copper wire combinations - 2 #6, 2 #8, or 2 #10.

12. When safe, energize the device and check the control board for the red light to be on, indicating power. The green output light should correspond to the state of the contactor and should not be flashing. If the green light is flashing continuously, it indicates that there is little to no current being read by one or both current monitoring devices. Most operating installations should have some current flow on both monitored main electrical lines so a flashing green led may indicate improper installation of one or both current monitoring devices. The green LED will stop flashing when it senses some current on both main lines. Although it will still operate with one current monitoring device not reading current, the installation should be verified. To do this, turn on a high-current 240V device in the electrical system and the LED should stop flashing. If it does not, recheck the current monitoring device installation from step 3 ensuring that the polarity of the current monitoring devices is correct, and all connections are secure. If this is all correct, contact the manufacturer.
13. Install included “Black Box Device Controlled Label” on the end device being controlled to indicate it is a controlled device and occasional off times are normal. Then record the values of the electrical service and the end device that is connected to it in the indicated areas on the EVEMS label. Finally, label the electrical panel schedule to indicate the breaker numbers that connect the controlled device and indicate that it is controlled by the Black Box energy manager.
14. Install the enclosure cover and when safe to do so, energize the system.
(Note: The contactor may not close until a computational observation time of between 0 - 15 minutes. The algorithm must be satisfied that the system will remain below 80% of the rated main breaker and other values included in it. This is partially dependent on the setting of the timer adjustment screw (blue & white) on the control board. If this observation time is too long, it can be adjusted by turning this dial setting counter-clockwise but this should not be set below 1 minute to avoid undesired operation.)

SETTINGS CHARTS

WARNING: TESTING, MAINTENANCE, AND TROUBLESHOOTING SHOULD ALWAYS BE CARRIED OUT BY QUALIFIED PERSONNEL. REASONABLE SAFETY PRECAUTIONS SHOULD ALWAYS BE TAKEN AROUND ELECTRICAL DEVICES AND OUTLETS TO PREVENT FIRE, ELECTRIC SHOCK, AND INJURY TO PERSON.



See the setting diagram chart on the inside cover and on the next page as well as continued installation instructions.

All settings are applicable for EV chargers or other loads that tolerate switching their power off when required. For other loads that are not specifically listed in the chart use the next higher setting compared to the rating of the load.

EVEMS240-200-90A Settings Chart For Main Breakers sized 125A – 200A

Red LED: Power / Green LED: Output ON/OFF
 White/Blue Dial Time Setting 0-15 min
 (Location of Dial and Switches may vary)

Always be sure to maintain current monitoring device's wire polarity.

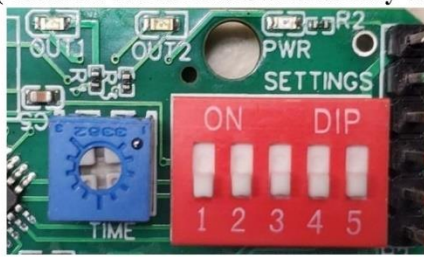

| Main Electrical Service Monitored Breaker Size | End Device Controlled Max Current Draw | DIP Switch 1 | DIP Switch 2 | DIP Switch 3 | DIP Switch 4 | DIP Switch 5 |
|--|--|--------------|--------------|--------------|--------------|--------------|
|--|--|--------------|--------------|--------------|--------------|--------------|

Settings Below are for Main Breakers Rated at 80% Continuous Load Only

| | | | | | | |
|-----|----|-----|-----|-----|-----|-----|
| 125 | 55 | OFF | OFF | OFF | OFF | OFF |
| 125 | 60 | OFF | OFF | OFF | OFF | ON |
| 125 | 65 | OFF | OFF | OFF | ON | OFF |
| 125 | 70 | OFF | OFF | OFF | ON | ON |
| 125 | 75 | OFF | OFF | ON | OFF | OFF |
| 125 | 80 | OFF | OFF | ON | OFF | ON |
| 125 | 85 | OFF | OFF | ON | ON | OFF |
| 150 | 60 | OFF | OFF | ON | ON | ON |
| 150 | 65 | OFF | ON | OFF | OFF | OFF |
| 150 | 70 | OFF | ON | OFF | OFF | ON |
| 150 | 75 | OFF | ON | OFF | ON | OFF |
| 150 | 80 | OFF | ON | OFF | ON | ON |
| 150 | 85 | OFF | ON | ON | OFF | OFF |
| 150 | 90 | OFF | ON | ON | OFF | ON |
| 200 | 60 | OFF | ON | ON | ON | OFF |
| 200 | 65 | OFF | ON | ON | ON | ON |
| 200 | 70 | ON | OFF | OFF | OFF | OFF |
| 200 | 75 | ON | OFF | OFF | OFF | ON |
| 200 | 80 | ON | OFF | OFF | ON | OFF |
| 200 | 85 | ON | OFF | OFF | ON | ON |
| 200 | 90 | ON | OFF | ON | OFF | OFF |

Settings Below are for Main Breakers Rated at 100% Continuous Load Only

| | | | | | | |
|-----|----|----|-----|-----|-----|-----|
| 125 | 60 | ON | OFF | ON | OFF | ON |
| 125 | 70 | ON | OFF | ON | ON | OFF |
| 125 | 80 | ON | OFF | ON | ON | ON |
| 150 | 60 | ON | ON | OFF | OFF | OFF |
| 150 | 70 | ON | ON | OFF | OFF | ON |
| 150 | 80 | ON | ON | OFF | ON | OFF |
| 200 | 60 | ON | ON | OFF | ON | ON |
| 200 | 70 | ON | ON | ON | OFF | OFF |
| 200 | 80 | ON | ON | ON | OFF | ON |
| 200 | 90 | ON | ON | ON | ON | OFF |

| | | | | | |
|---------------------------------------|----|----|----|----|----|
| Single Circuit Load Sharing Operation | ON | ON | ON | ON | ON |
|---------------------------------------|----|----|----|----|----|

Allows a controlled device to operate only when another is not drawing power.

SETUP FOR SINGLE CIRCUIT LOAD SHARING

Black Box Innovations single circuit load sharing can be used to allow a “Secondary” device (device being controlled) to operate only when the “Primary” device is not drawing power.


If using Black Box’s single circuit load sharing option, ensure that the dip switches are set to the correct setting. This is indicated on the settings chart located on page 10 of this manual and can also be found on the back of the Energy Manager’s cover plate.

Install the current monitoring devices around the desired priority device’s feed lines. Ensure that they are installed in the correct orientation as shown on the label and with the arrow shown inside the current monitoring device’s eye (window opening) pointing in the direction of the current flow.

Next, adjust the timing dial found on the control board to the desired monitoring time. The dial will provide the time element for the algorithm to turn the end device being controlled back on between 0-15 minutes (clockwise is greater). If the current monitoring devices sense a small amount of current being drawn from these lines it will automatically switch power off to the secondary device, and will only energize the secondary device once current flow stops to the primary device and the time element is satisfied. Please note, if at any point within the time setting, the current monitoring devices sense that the priority device is drawing power again, the timer will restart. This is to avoid short cycling of power and potential damage to the secondary device.

Once completed adhere the auxiliary single circuit load sharing label to the front cover of the Energy Manager, or indicate on the cover label that this is a single circuit load sharing installation.

Please refer back to installation step 9 on page 8 of this manual to complete your installation.

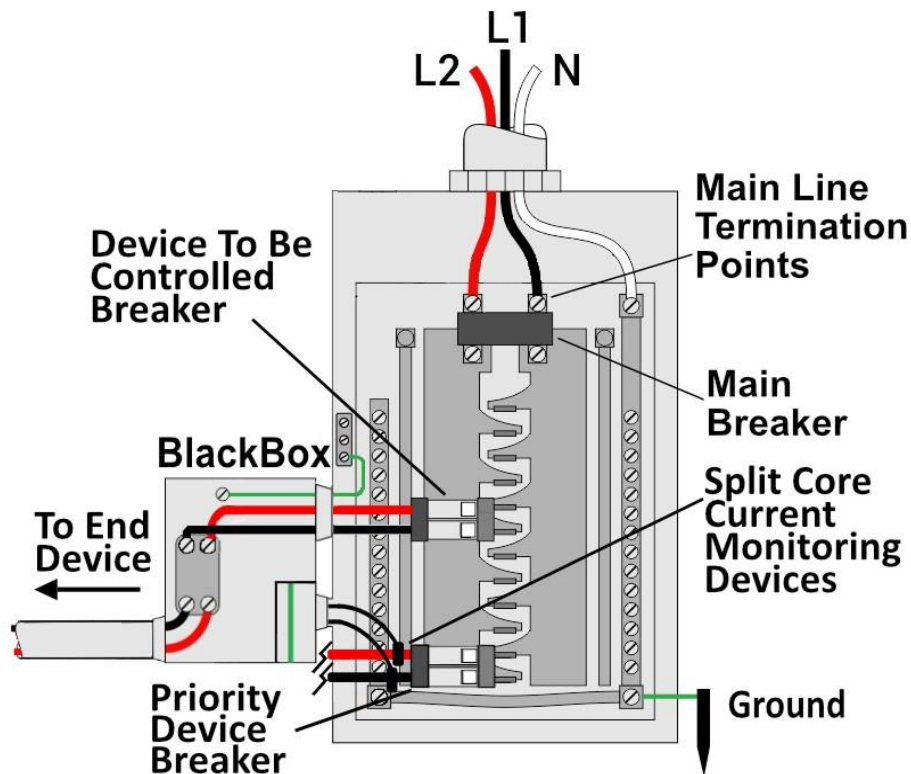

Alternate locations for device installation are acceptable.

STEP 4: TEST FOR OPERATION




WARNING: TESTING, MAINTENANCE, AND TROUBLESHOOTING SHOULD ALWAYS BE CARRIED OUT BY QUALIFIED PERSONNEL. REASONABLE SAFETY PRECAUTIONS SHOULD ALWAYS BE TAKEN AROUND ELECTRICAL DEVICES AND OUTLETS TO PREVENT FIRE, ELECTRIC SHOCK, AND INJURY TO PERSON.

Testing for correct installation and device operation can be done by switching the Energy Manager into “test mode”. This can be done by turning the time dial located on the control board all the way counter-clockwise to 0 minutes. Black Box Innovations' optional Operational Testing Device can be used to simulate load percentages of the main service. This optional Operational Tester can be purchased on our website at www.blackboxelectrical.com/collections/all. This can also be done by loading the service to over 80% or 100% of its rating depending on settings and verifying that the controlled device is switched off. Then remove all loads while maintaining device power and wait for 15 min or less for it to switch back on again. Once testing is complete be sure to turn the timing dial located on the control board back to the desired observation time setting.

Warning: Warranty VOID if any devices are installed incorrectly.

MULTI-RESIDENTIAL HUB CONNECTION & REMOTE SHUTDOWN OVERRIDE

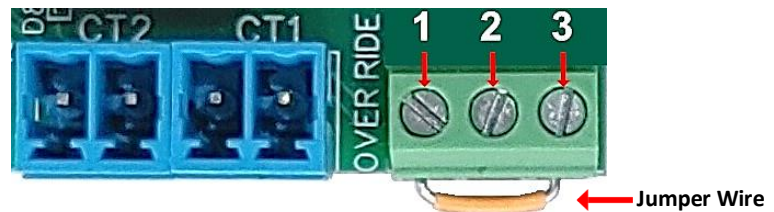

This is the interface with the Black Box Multi-Residential Energy Management Hub that provides additional protection for the main feeder in multi-residential applications. The required wiring to be used for this application is at minimum a shielded 3-wire 18 AWG cabling with a maximum of 200 ft (61m). Please see the installation instructions for the Black Box Multi-Residential Hub for more information.

This connection point can also be used as a remote shutdown override by connecting a dry contact from a separate control device to the green terminals 1 & 3 on the control board as shown above. When the controller detects the opening of this dry contact it will de-energize the device it is controlling and keep it that way as long as it remains in this “open” state. When in this state the second Green LED will start to flash also indicating it is in override. Once the dry contact closes, the device will resume normal computer-controlled operation. This can interface with many types of other devices such as building control systems, rotational scheduled timers, fire alarm overrides, or similar dry contact systems. Wiring for this connection must be at minimum a shielded 2-wire 18 AWG cable with a maximum length of 200 ft (61 m).

If no auxiliary connection devices are needed, the supplied jumper can be installed across terminals 1 & 3 to maintain normal operation.

MAINTENANCE

WARNING: TESTING, MAINTENANCE, AND TROUBLESHOOTING SHOULD ALWAYS BE CARRIED OUT BY QUALIFIED PERSONNEL. REASONABLE SAFETY PRECAUTIONS SHOULD ALWAYS BE TAKEN AROUND ELECTRICAL DEVICES AND OUTLETS TO PREVENT FIRE, ELECTRIC SHOCK, AND INJURY TO PERSON.

Do not use any cleaning solvents or other combustibles on the devices, as this can cause risk of fire, improper device operation, or risk of electric shock and/or injury.

Electrical connections should be maintained to the standard set by CSA Z463 and inspected, maintained, and re-torqued annually. The interval between maintenance cycles may need to be reduced in areas with high ambient temperature variance or dusty environments.

For contactor disassembly and maintenance instructions please see pages 14-15 of this document.

***** WARNING: Contactor electrical connections MUST be torqued to 50-54 in-lb (5.5 Nm) to avoid objectionable operational noise, overheating issues, and premature failure. *****

TROUBLESHOOTING

WARNING: TESTING, MAINTENANCE, AND TROUBLESHOOTING SHOULD ALWAYS BE CARRIED OUT BY QUALIFIED PERSONNEL. REASONABLE SAFETY PRECAUTIONS SHOULD ALWAYS BE TAKEN AROUND ELECTRICAL DEVICES AND OUTLETS TO PREVENT FIRE, ELECTRIC SHOCK, AND INJURY TO PERSON.

Contactor does not close when the initial device is powered on:

There is an initial delay when the device is powered on while the computer algorithm is checking the electrical service. The contactor will not close until a computational observation time elapses. During this time the current draw on the main electrical service wires must remain below threshold current values of 80% or 100% depending on the settings of the main breaker size. This is also dependent on the setting of the timer adjustment screw (blue & white) on the control board referred to under installation instructions #8 and the chart in the instructions and other algorithmic values. If this observation time is too long, it can be adjusted by turning this screw counter-clockwise. You can follow the procedure for testing and operation in this manual to test the device. If this test shows the device is not working, then check to see if the red LED on the control board is on. Also, check for 240/208V power at the line side terminations (L1 & L2) on the contactor. If there is appropriate power present and the red LED is on, then check that both the red and two blue wires with connectors (stake-ons) are on the terminals that are plugged into the line side of the contactor and are secure. Once this is confirmed, then check that the black and blue wires with connectors on either side of the contactor coil are secure. If they are secure, next check the field-installed wires in the contactor lugs on both the line side (L1 & L2) and load side (T1 & T2) are properly installed. Next, ensure the current monitoring device is secured shut and connections are the correct polarity. Also, Ensure the current monitoring device wires and connectors are fully seated in the respective

connectors and receptacles. If these items all have been checked and the issue is not resolved, please de-energize the device and contact the manufacturer.

Improper operation of devices contactor:

Check if the length of the current monitoring device lead wires are coiled close to, or run parallel to other 120/240V lines and if so, move them away from the area, as this can cause improper operation. Next, check if the current monitoring devices are closed and secured shut with the provided cable ties. If they are, check if the current monitoring devices are installed in the correct orientation as shown on the label and with the arrow shown inside the current monitoring device's eye (window opening) pointing in the direction of the current flow. If the orientation is correct, then verify that both service wires are consistently well below the operational current specifications for up to 15 minutes (depending on the setting of timer adjustment) with an amp meter. Ensure the current monitoring device connections are the correct polarity (while plugged into the control board the red wire should be closest to the partition side wall on each plug). Ensure the current monitoring device wires and connectors are fully seated in the respective connectors and receptacles.

If the green LED is flashing it indicates there has been no current recorded on one or both current monitoring devices for some time. If this is the case, please check the procedure in installation instructions #12. If these instructions are followed and improper operation still exists, please de-energize the device and contact the manufacturer.

Contactor chatters on and off or makes a loud humming noise:

Some humming is normal in all devices that have an electrical coil or contactor but if this is objectionable check the following: Verify approximately 240V (or 208V depending on the service voltage) between the contactor coil terminals when the contactor is closed. If this is below 200V check the voltage on the line side of the contactor to ensure rated supply system voltage is available. (It should be above 200V). Check for the same steady voltage on the load side of the contactor when the contacts are closed. If the voltage is below 200V then it is below specifications and it will need to be addressed with the utility provider or via voltage drop calculation and adjustment. If the voltage is between 200 – 260V at all specified locations, then the most common cause of an abnormally noisy contactor that is still operating normally is dust or other particles in the active part of the contactor. The contactors can be disassembled, and the core surfaces can be cleaned to remedy this. For contactor disassembly and maintenance instructions please see pages 14-15 of this document. Do not allow installation particles or dust particles to be blown around the enclosure at installation and operate in a clean environment.

If the contactor is chattering on and off and the voltage at the load side of the contactor is **not** steady, then verify that the timer adjustment screw (blue & white) on the control board is set approximately ½ way between the left and right rotation. If adjustment is needed, insert a screwdriver and adjust accordingly. Then reset the power to the device and check for proper operation. The farther this dial is turned clockwise the more time the computer algorithm will watch the service loading before allowing the load side (i.e.: EV charger) to energize. Ensure the current monitoring device connections are the correct polarity (red wire closest to the plastic partition when it is plugged into the socket). Ensure the current monitoring device wires and connectors are fully seated in the respective connector and socket.

The device is built with noise isolators between the contactor and the enclosure as all contactor coils will make some slight humming sound when in operation. If the screws that attach the contactor to the enclosure are overtightened or the rubber acoustic isolators are removed any sound may be amplified. These screws can be adjusted to allow for acoustic separation while maintaining the connection between the enclosure and contactor chassis. These screws should be tightened to 5.5 in-lb (0.6Nm).

If these things are checked and the contactor is still chattering or making a loud noise, please de-energize the device and contact the manufacturer.

***** WARNING: Contactor electrical connections MUST be torqued to 50-54 in-lb (5.5 Nm) to avoid objectionable operational noise, overheating issues, and premature failure. *****

INFORMATION

This document contains important instructions which must be followed during the installation, and maintenance of this device.

Notes

After installation verify that the device is securely attached to an adequate structure in a well-ventilated location.

It is the installer's responsibility to verify that the electric power source is adequate for the use of the device.

Do not use any solvents to clean this device.

Do not paint or apply exterior finishing to this device.

Do not use this energy management system with end devices that require constant power.

CAUTIONS

The installation of the device must be done to the latest electrical code requirements and with the consultation of, and according to the manufacturer's specification and guidelines of both the Electrical Vehicle (EV) and the Charging Station. This device will shut off and re-energize electricity to both the Electric Vehicle, its Charging Station, or other load-side devices without notice.

WARNING

Read all documentation provided by the device manufacturer before using this product and follow the installation and setup procedures. Always disconnect any and all sources of power before starting work.

Do not modify, repair, or dismantle the device.

Never introduce water or any other liquids to the area around or on this device.

Do not install the device near flammable materials, explosives or fuels, chemical products, and vapors.

Do not install this device in a hazardous or wet environment or location.

Disconnect this device immediately if defective or damaged in any way and contact the manufacturer.

Any improper use of the device could result in serious injuries, death, or damage to property.

Any improper use of the device can cause damage which will void the warranty.

Never use the device above or below the temperature range of 34°F to 104°F (1°C to 40°C). The devices must be always kept free of frost and water vapor.

Feedback

We are always happy to hear your feedback and we look forward to hearing from you. Please email all comments to customerservice@blackboxelectrical.com.

You can also contact us by clicking on the message us button on our website at www.blackboxelectrical.com or by calling us at our toll-free number 1 (833) 325-5269.

Limited warranty

- 1.** Black Box Innovations Inc. warrants this device against any defects for a period of one year from the date of shipping. The warranty is limited to the components and equipment supplied by Black Box Innovations Inc.
- 2.** Black Box Innovations Inc. may undertake repair or replacement, at the site or the manufacturing location, at its option, of the defective material only after an evaluation has been made by its representative.
- 3.** If, in the opinion of Black Box Innovations Inc. installation has been done incorrectly, or the device is used inappropriately, or repairs have been done by unauthorized personnel other than representatives of Black Box Innovations Inc., the warranty will be automatically void.
- 4.** Black Box Innovations Inc. will not be held liable for damages or delays and will not be required to pay the transport cost of the charge controller claimed to be defective.
- 5.** Prior written consent must be made by Black Box Innovations Inc. before repairs, replacement, modifications, or compensation is to be made.
- 6.** Black Box Innovations Inc. shall not be liable for any indirect damages or delays caused by inadequate workmanship, or materials on devices installed. This also applies if the installations are not made in accordance with the manufacturer's instruction, local electrical codes, as well as specifications of devices powered through this device.
- 7.** Black Box Innovations Inc. shall not be liable for any direct or indirect damages or delays for any devices that are connected to this device that can not tolerate having supplied power switched off for any time period specified by the device or when the device is in need of repair or maintenance.
- 8.** Any device or accessory supplied with this device to be installed or connected remotely from the charge controller will be guaranteed by the manufacturer only under the conditions mentioned in paragraphs 6 & 7 and in accordance with the rest of this document.
- 9.** Any repairs made at the Black Box Innovations Inc. factory are warranted for 30 days from the date of repairs.
- 10.** Any components supplied for repairs are warranted for the remaining of the warranty on the original product or 90 days whichever is longer.

