AVALLON

Northern WIDE PLANK

TANNIC



A LAYERED COMPLEXITY CHARACTERIZES BOTH AVALLON PLANKS AND THE FRENCH VILLAGE OF THE SAME NAME. THIS ANCIENT TOWN UNCOVERS INTRICATE ARCHITECTURE AND A MERGING OF OLD AND NEW INTO AN ENTIRELY UNIQUE RESULT. AVALLON GENUINE FRENCH OAK PLANKS SHOWCASE THIS DEPTH, COMBINING WARM AND GREY UNDERTONES THAT PROMPT YOU TO STUDY THIS UNEXPECTED MIX OF TRADITIONAL AND CONTEMPORARY SENSIBILITIES.


SPECIFICATIONS

MANUFACTURED: WOOD ORIGIN: WOOD SPECIES: TYPE: GRADE: SHADE: SURFACE: EDGES: THICKNESS:

CONSTRUCTION: FINISH: PLANK WIDTHS: PLANK LENGTHS:

HERRINGBONE DIMENSIONS: CHEVRON DIMENSIONS: COLOUR VARIATION: CERTIFICATIONS:



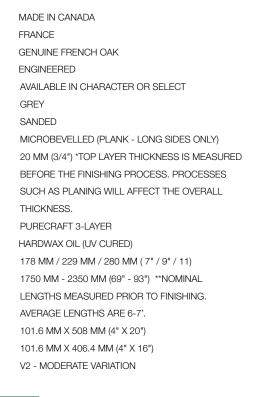

Declare.

NA

CLEANING AND CARE

Northern Wide Plank requires a relative humidity range of minimum 30%, maximum 65%, and a temperature range between 15°C (60°F) to 24°C (75°F) Refer to NWP Cleaning & Care for Hardwax Oil finished wood floors for more info.

TECHNICAL PERFORMANCE

ESSENTIAL CHARACTERISTICS

Emission of Formaldehyde

PERFORMANCE
ASTM E 648-17 CLASS II
E1 / CARB 2 compliant
1,360 lbf (6,000 N)

FSC

FSC© AVAILABLE UPON REQUEST

Janka Hardness Rating Post Consumer Recycled Content %

INSTALLATION

Reaction to fire

ТҮРЕ	RECOMMENDATION
Full Glue Down	YES - RECOMMENDED
Nail Down	YES - WITH GLUE ASSIST
Floating	NOT RECOMMENDED
Over Underfloor Heating	YES - REFER TO NWP RADIANT HEAT GUIDE

APPLICATIONS: Floors, Walls and Ceilings. Stair Treads, Nosing, and Vents are also Available.