


**Baseus倍思**

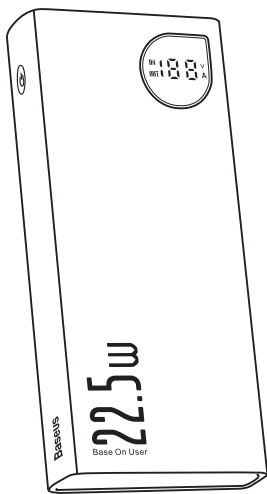

DZ-YMX Baseus Adaman Metal Digital Display Quick Charge Power Bank 10000mAh 22.5W Tarnish (UL Edition)

## User Manual

Please read this user manual carefully before use and keep it properly


### 1. Product Parameter

Name: Power Bank  
 Model No.: PPDAM10UL  
 Battery: Lithium polymer battery  
 Capacity: 10000mAh/3.7V/37Wh  
 Rated Capacity: 5800mAh(5V-3A)  
 Energy Conversion Rate: ≥ 75%  
 Input:  
 iP: 5V-2A, 9V-2A  
 Micro: 5V-2A, 9V-2A  
 Type-C: 5V-3A, 5.5V-3A(SCP), 9V-2A  
 Output:  
 USB1: 4.5V-5A(SCP), 5V-4.5A(SCP), 5V-3A, 9V-2A, 12V-1.5A  
 USB2: 4.5V-5A(SCP), 5V-4.5A(SCP), 5V-3A, 9V-2A, 12V-1.5A  
 Type-C: 5V-3A, 9V-2.22A, 12V-1.5A  
 USB1+USB2: 5V-3A  
 USB1+Type-C: 5V-3A  
 USB2+Type-C: 5V-3A  
 Total Output: 5V-3A  
 Size: 143\*65\*15.2mm  
 Weight: About 240.5g

### 2. Packing List

- Power Bank \*1
- User Manual \*1
- Warranty Card \*1
- Charging Cable \*1

### 3. Product Diagram

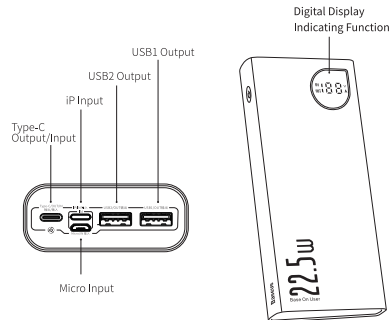

1

### 4. Product Description

This product is a super charging mobile power bank supporting 5A high current and maximum output power up to 22.5W. It supports two quick charging modes of SCP and FCP of Huawei. It is compatible with PD3.0, QC4+, QC3.0, Samsung AFC, PE+ and other fast charging modes. Overtemperature, short circuit protection and other multiple security protection circuits.

### 5. Instructions For The Use Of Products

#### 5.1 Key operation instructions

- In the no-load state, the button displays the current power and no-load voltage at one time.
- Under the load state, the button displays the current power once, the current voltage again and the current current again.
- When multiple devices output at the same time, display the total output current of multiple devices.
- When the input and output side, only the input voltage and current are displayed.

#### 5.2 Charging operation instructions

##### 5.2.1 Charging your mobile phones or other digital devices by using Adaman Metal Power Bank

- Check and make sure the charging voltage of your digital products is consistent with the voltage output of Adaman Metal Power Bank
- Select and use the original charging cable of your digital products, connect one end of it with your digital product, and the other end with the output port of Adaman Metal Power Bank, Adaman Metal Power Bank then automatically starts to charge your digital product, with the LED indicator lit all the time.

##### 5.2.2 Charging Adaman Metal Power Bank by using a AC charger or PC USB port

- Select and use the original USB cable, connect the Lightning, Micro or type-C port with the Lightning, Micro or type-C input port of Adaman Metal Power Bank.
- Connect the USB-A or Type-C connector with the USB port of AC charger or PC USB port, and the LED indicator begins to flash, that is charging Adaman Metal Power Bank. While full charge the indicators become lit constantly.

### 6. Use Environment

Use ambient temperature: non-tropical area below 0°C to 35 °C  
 Storage ambient temperatures: 0 °C to 40 °C degrees Celsius

### 7. Icon Description

The 5-year icon refers to the "valid environment-friendly use period", not the product quality assurance period. Electronic products contain toxic and harmful substances such as lead, mercury and cadmium. The overdue use of these products may lead to leakage or mutation of these toxic and harmful substances, and cause environment pollution or serious damage to people and property. The term of "environment-friendly use period" means that all electronic products shall be used within this validity period. We are free of any responsibility against safety issues caused by using the product beyond its safe service life.

2

### 8. Safety Warning Instructions

Please read all instructions and warnings before using this product. Non-standard use will damage the product or personal safety.

- Due to the existence of conversion efficiency, so rated output capacity is less than battery capacity.
- When you need to check the power, press the power button once and the LED indicator lights up to show the current power. In the connectionless state, the power will automatically sleep after about 30 seconds.
- Please charge your power bank periodically (at least one time with 5 months recommended) in order to maintain its long service life.
- Improper use of the product can easily cause damage to the product or may endanger personal and property safety.
- Consumer shall be liable for any personal and property damage resulting from their improper use against the user manual or ignoring the warning, to which our company will not bear any legal liability.
- Disintegration of this product by non-professionals is strictly prohibited.
- Use of household appliances or loads in excess of the output current of this product shall be avoided (no output due to circuit protection).
- Intense physical actions including knocking, throwing, trampling on and squeezing, etc. shall be avoided.

### 9. Statement on Toxic and Hazardous Substances in Electronic Information Products

Part Description	Toxic or hazardous substances and elements					
	Lead (Pb)	Mercury (Hg)	Cadmium (Cd)	Hexavalent chromium (Cr VI)	Polybrominated biphenyls (PBB)	Polybrominated diphenyl ethers (PBDE)
PCB	X	○	○	○	○	○
Electrode	○	○	○	○	○	○
Battery	X	○	○	○	○	○
Casing	○	○	○	○	○	○

This form is compiled in accordance with SJ/T 11364.

○: Indicates that contents of the toxic and hazardous substances in all homogeneous materials are below the limit requirements specified by GB/T 26572 standard.

X: Indicates that contents of the toxic and hazardous substances exceed the limit requirements specified by GB/T 26572 standard in at least one homogeneous material of the component.

Warning Please follow the above safety instructions otherwise it will cause fire,electric shock, damage or other damage.

3

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.  
 NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

It is hereby declared that PPDAM10UL, a product model of Shenzhen Times Innovation Technology Co., Ltd., complies with the provisions of Directive 2014/30/EU and Directive 2011/65/EU. The full text of the EC Declaration of Conformity can be found on the following website: [www.baseus.com](http://www.baseus.com)

This equipment complies with the provisions of Directive 2012/19/EU and Directive 2006/66/EU. It is strictly forbidden to dispose of this equipment with ordinary trash; it must be recycled. This symbol indicates that the product shall not be treated as regular domestic trash, and must be delivered to a recycling center that is capable of recycling electronic and electrical equipment.



Manufacturer: Shenzhen Times Innovation Technology Co., Ltd.  
 Add: 5th Floor, Building B, Baseus Intelligence Park, No.2008, Xuegang Rd, Gangtou Community, Bantian Street, Longgang District, Shenzhen  
 Executive Standard: GB/T35590-2017  
 Hotline: +86-4000-712-711 Website: [www.baseus.com](http://www.baseus.com)

PB3320Z P0A0  
 Designed by Baseus  
 Made in China

4