

倍思 珠光数显快充移动电源3000mAh 65W
使用说明书

使用产品前请仔细阅读本使用说明书，并妥善保管

一、产品参数

名称: 移动电源 3000mAh
型号: BS-30KP365
电芯: 聚合物锂电池
电池容量: 10000mAh/11.4V/114Wh
额定容量: 18000mAh (5V=3A)
能量转换率: ≥75%
IP输入: 5V=2.1A
Micro输入: 5V=2A, 9V=2A, 12V=1.5A
Type-C输入: 5V=3A, 9V=3A, 12V=3A, 15V=3A, 20V=3A
Type-C输出: 5V=3A, 9V=3A, 12V=3A, 15V=3A, 20V=3.25A
USB1/2/3输出: 5V=3A
USB4输出: 5V=4.5A(SCP), 4.5V=5A(SCP), 5V=3A, 9V=3A, 12V=2.5A, 20V=1.5A
USB1+2+3+4输出: 5V=3A
USB1/2+3+Type-C输出: 1.5W+45W
USB4+Type-C输出: 18W+45W
5V总输出: 5V=6A
产品尺寸: 145x65x38MM
产品重量: 约550克

二、包装内容

移动电源*1
说明书*1
保修卡*1
E-marker 5A 充电线*1


三、产品功能特征

1. IP输入接口
2. Micro输入接口
3. Type-C输入及输出接口
4. USB1输出接口
5. USB2输出接口
6. USB3输出接口
7. USB4快充输出接口
8. 开关与电压电流操作按键
9. LED数显显示屏

四、产品描述

本产品是一款能为手机、笔记本电脑、平板、电子书、游戏机等数码产品提供充电的便携式充电设备，产品具有3输入、5输出、PD3.0双向快充、60W大功率输入、65W输出，电量电压电流数字显示等特点。

五、产品示意图

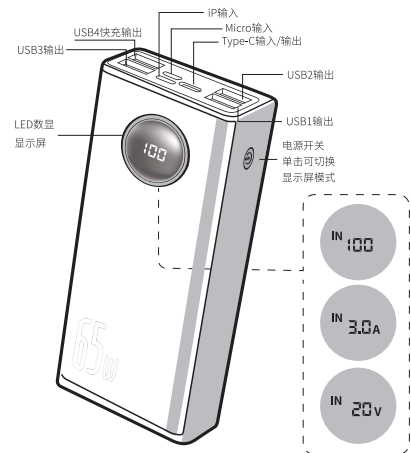

六、操作说明

(一) 按键操作说明

1. 空载状态下，按键一次显示当前电量。
2. 负载状态下，按键一次显示当前电量、再次按键显示当前电压、再次按键显示当前电流，当有多路负载接入时，显示当前电压及总负载电流。

(二) 珠光快充数显移动电源为手机或其它数码设备充电

1. 检查数码产品的充电电压是否与珠光快充数显移动电源的输出电压匹配。
2. 选择数码产品的原装充电线，一端与数码产品连接，另一端与珠光快充移动电源的输出口连接，珠光快充移动电源将自动开启给数码产品充电，电量指示灯常亮。

(三) 珠光快充数显移动电源为手机或其它数码设备充电

1. 选择原装USB线，将IP、Micro或Type-C的接头与珠光快充移动电源的IP、Micro或Type-C的输入端口连接。
2. 将USB-A或Type-C接头与充电器或电脑USB端口连接，LED电量指示灯开始闪烁，表示正在为珠光快充移动电源充电，充满后LED灯常亮。

七、温馨提示

1. 移动电源存在转化效率，故移动电源电池容量不等于可充电量。
2. 按一下电源开关键，LED指示灯亮起显示当前电量，长按电源开关键可关闭电源，无连接状态下，35秒后电源会自动休眠。
3. 请定期为您的电源充电(建议最少每5个月一次)，可维持其长久的使用寿命。
4. 产品使用不当，容易造成产品本身或者可能危及人身财产安全。
5. 如因消费者违反产品说明书不恰当使用或警示，造成的人身及财产损失将自行承担一切后果，本公司将不承担任何法律责任。
6. 非专业人员严禁拆解本产品。
7. 避免使用超出本产品输出电流的用电器或负载(电路会保护，无输出)。
8. 避免强烈的物理作用，包括敲击、投掷、践踏、挤压等。

八、安全性信息


1. 为防止电池可能发生泄露、发热、爆炸，请注意以下安全注意事项。
2. 本移动电源选用高品质的聚合物电池，敬请放心使用。
3. 切勿摔碰，切勿自行拆开或刺穿本电源，切勿将电源暴露在火中、高温或水中，建议使用手机自带或正规品牌的电源适配器为其充电，如果发现电源有鼓胀、漏液或者其他不良现象或被充电设备有膨胀现象，请停止使用。
4. 电源在充放电使用过程中会有适当的发热现象，温度在40°C以下，并不影响产品性能，请放心使用。

九、电子信息产品有毒有害物质声明

部件名称	有毒有害物质或元素					
	铅 (Pb)	汞 (Hg)	镉 (Cd)	六价铬 (Cr VI)	多溴联苯 (PBB)	多溴二苯醚 (PBDE)
PCB	X	○	○	○	○	○
电池	X	○	○	○	○	○
外壳	○	○	○	○	○	○

本表格依据SJ/T 11364的规定编制。
O:表示该有毒有害物质在该部件所有均质材料中的含量均在GB/T 26572标准规定的限量要求以下。
X:表示该有毒有害物质至少在该部件某一均质材料中的含量超出GB/T 26572标准规定的限量要求。
本表格信息是基于供应商提供的数据及符合ROHS环保要求的检测结果。
温馨提示:年限是指“环保有效使用期限”，不是产品质量保证期限。电子产品均含有铅、汞、铜等有毒有害物质，一旦超期使用，有毒有害物质将可能因为发生外泄或突变，对环境造成污染，或对人体、财产造成严重损害。“环保使用期限”，意味着所有的电子产品均将被要求在此有效期限内使用，超过安全使用年限之后出现的安全风险问题，我们不再对产品质量负责。

特此申明，深圳市时商创展科技有限公司的产品型号为:BS-30KP365符合指令2014/30/EU、2011/65/EU的规定，欲声明符合性声明的全文可在以下网站查询: www.baseus.com。




此设备符合欧盟指令2012/19/EU、2006/66/EU的规定，此设备不得与普通废弃物一起处理，必须回收利用。此符号标明本产品不得作为生活垃圾处理，而必须将本产品交至相应的废品回收站，进行电子电气设备回收处理。

制造商: 深圳市时商创展科技有限公司
地址: 深圳市龙岗区坂田街道岗头社区雪岗路2008号倍思智能园B栋五层
执行标准: GB/T 35590-2017
热线: 4000-712-711 网址: www.baseus.com

请遵守以上安全说明否则会导致起火、触电、损坏或其他伤害



PB2415Z1/POA2
FSD-SL-BS-30KP365

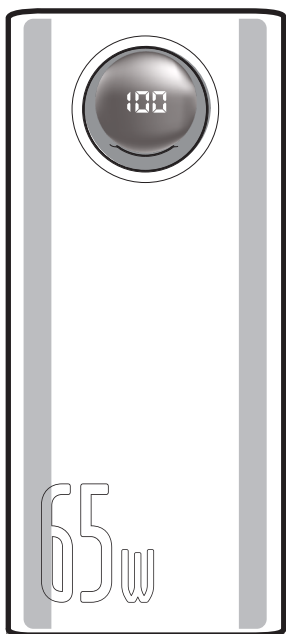

Baseus Amblight Digital Display Quick Charge Power Bank 3000mAh 65W

User Manual

please read this instructions completely and keep it properly

1. Product Parameter

Name: Power Bank 3000mAh
Model No: BS-30KP365
Battery: Lithium-ion polymer battery
Battery Capacity: 10000mAh/11.4V/114Wh
Rated Capacity: 18000mAh (5V=3A)
Power Conversion Rate: ≥75%
IP Input: 5V=2.1A
Micro Input: 5V=2A, 9V=2A, 12V=1.5A
Type-C Input: 5V=3A, 9V=3A, 12V=3A, 15V=3A, 20V=3A
Type-C Output: 5V=3A, 9V=3A, 12V=3A, 15V=3A, 20V=3.25A
USB1/2/3 Output: 5V=3A
USB4 Output: 5V=4.5A(SCP), 4.5V=5A(SCP), 5V=3A, 9V=3A, 12V=2.5A, 20V=1.5A
USB1+2+3+4 Output: 5V=3A
USB1/2+3+Type-C Output: 1.5W+45W
USB4+Type-C Output: 18W+45W
5V Total output: 5V=6A
Product size: 145x65x38MM
Product weight: About 550g

2. Packing List

Power Bank *1
User Manual *1
Warranty card *1
5A E-marker Charging Cable *1


3. Features

- 3.1 IP input interface
- 3.2 Micro input interface
- 3.3 Type-C input and output interface
- 3.4 USB1 output interface
- 3.5 USB2 output interface
- 3.6 USB3 output interface
- 3.7 USB4 fast charge output interface
- 3.8 Switch and voltage/current operated key
- 3.9 Digital display power display screen

4. Product description

This product is a portable charging device which can charging for mobile phones, Notebook computer, tablets, e-books, game consoles and other digital products. It has the characteristics of 3 input, 5 output, PD3.0 Dual Way Quick Charging, 60W large power input, 65W output, Real time current, voltage display, etc.

5. Product diagram

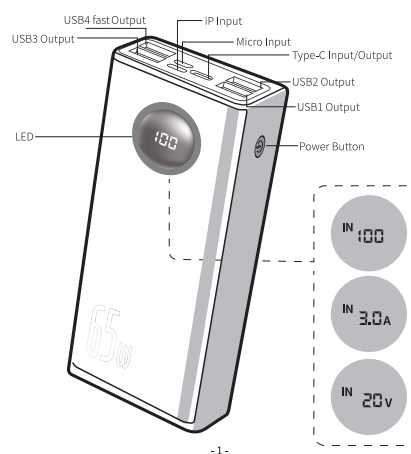

6. Operation Description

6.1 The power button operation instructions

- No load state, the button will display the current power at one time.
- Under the load state, the button displays the current power at one time, the current voltage at the second time, and the current at the second time. When multiple loads are connected, the current voltage and total load current are displayed.

6.2 Charging your mobile phones or other digital devices by using Amblight Quick Charger power bank

- Check and make sure the charging voltage of your digital products is consistent with the voltage output of Multig Quick Charger power bank.
- Select and use the original charging cable of your digital products, connect one end of it with your digital product, and the other end with the output port of Amblight Quick Charger power bank. Amblight Quick Charger power bank then automatically starts to charge your digital product, with the LED indicator lit all the time.

6.3 Charging Amblight Quick Charger power bank by using a AC charger or PC USB port

- Select and use the original USB cable, connect the IP, Micro or Type-C port with the IP, Micro or Type-C input port of Amblight Quick Charger power bank.
- Connect the USB-A or Type-C connector with the USB port of AC charger or PC USB port, and the LED indicator begins to flash, that is charging. Amblight Quick Charger power bank. While full charge the indicators become lit constantly.

7. Tips

- 7.1 Due to the existence of conversion efficiency, so rated output capacity is less than battery capacity.
- 7.2 Depress the power button once, the LED indicator is lit and displays the current battery capacity level, and the power supply can be shut down by a long press on the power button. In case there is no connection, the power bank automatically goes into standby mode by 35 seconds later.
- 7.3 Please charge your power bank periodically (at least one time with 5 months recommended) in order to maintain its long service life.
- 7.4 Improper use of the product can easily cause damage to the product or may endanger personal and property safety.
- 7.5 Consumer shall be liable for any personal and property damage resulted from their improper use against the user manual or ignoring the warning, to which our company will not bear any legal liability.
- 7.6 Disintegration of this product by non-professionals is strictly prohibited.
- 7.7 Use of household appliances or loads in excess of the output current of this product shall be avoided (no output due to circuit protection).
- 7.8 Intense physical actions including knocking, throwing, trampling on and squeezing, etc. shall be avoided.

8. Safety information

- 8.1 In order to prevent leakage, fever and explosion of batteries, please pay attention to the following safety precautions.
- 8.2 The portable power supply selects high quality polymer battery and you can it at ease.
- 8.3 Don't throw and separate it or impale the power supply by yourself; be sure not to expose the power into fire, high temperature or water; it's suggested that user should use power adapter which comes with phone or is standard brand for charging the power supply. If there are any ballooning phenomenon, please stop to use.
- 8.4 In the process of charging or discharging, the power supply has proper heating phenomenon; the heating temperature is below 40°C and without influencing products performance. user can use it at ease.

9. Declaration on Toxic or hazardous substances and elements contained in electronic products


Part Description	Toxic or hazardous substances and elements					
	Lead (Pb)	Mercury (Hg)	Cadmium (Cd)	Hexavalent chromium (Cr VI)	Polybrominated biphenyls (PBB)	Polybrominated diphenyl ethers (PBDE)
PCB	X	○	○	○	○	○
Battery	X	○	○	○	○	○
Casing	○	○	○	○	○	○

O: Indicates that contents of the toxic and hazardous substances in all homogeneous materials are below the limit requirements specified by GB/T 26572 standard.
X: Indicates that contents of the toxic and hazardous substances exceed the limit requirements specified in GB/T 26572 standard in at least one homogeneous material of the part.
The information provided in this form is based on the data provided by the supplier and in line with the detection result of ROHS environmental requirements. At the current level of technology, use of all toxic and hazardous substances or elements is controlled to the bottom line, but immunity of EU ROHS directive is followed. Environmental protection limit lasts 5 years.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:
- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

It is hereby declared that BS-30KP365, a product model of Shenzhen Times Innovation Technology Co., Ltd., complies with the provisions of Directive 2014/30/EU, Directive 2011/65/EU. The full text of the EC Declaration of Conformity can be found on the following website: www.baseus.com

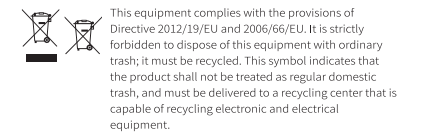

This equipment complies with the provisions of Directive 2012/19/EU and 2006/66/EU. It is strictly forbidden to dispose of this equipment with ordinary trash; it must be recycled. This symbol indicates that the product shall not be treated as regular domestic trash, and must be delivered to a recycling center that is capable of recycling electronic and electrical equipment.

Manufacturer: Shenzhen Times Innovation Technology Co., Ltd.
Add: 5th Floor, Building B, Baseus Intelligence Park, No.2008, Xuegang Rd, Gangtou Community, Bantian Street, Longgang District, Shenzhen
Executive Standard: GB/T 35590-2017
Hotline: +86-4000-712-711 Website: www.baseus.com

Warning Please follow the above safety instructions otherwise it will cause fire, electric shock, damage or other damage



PB2415Z1/POA2
FSD-SL-BS-30KP365